




Modul universal AS-Interface

UniversalModule 2AO(V) IP65

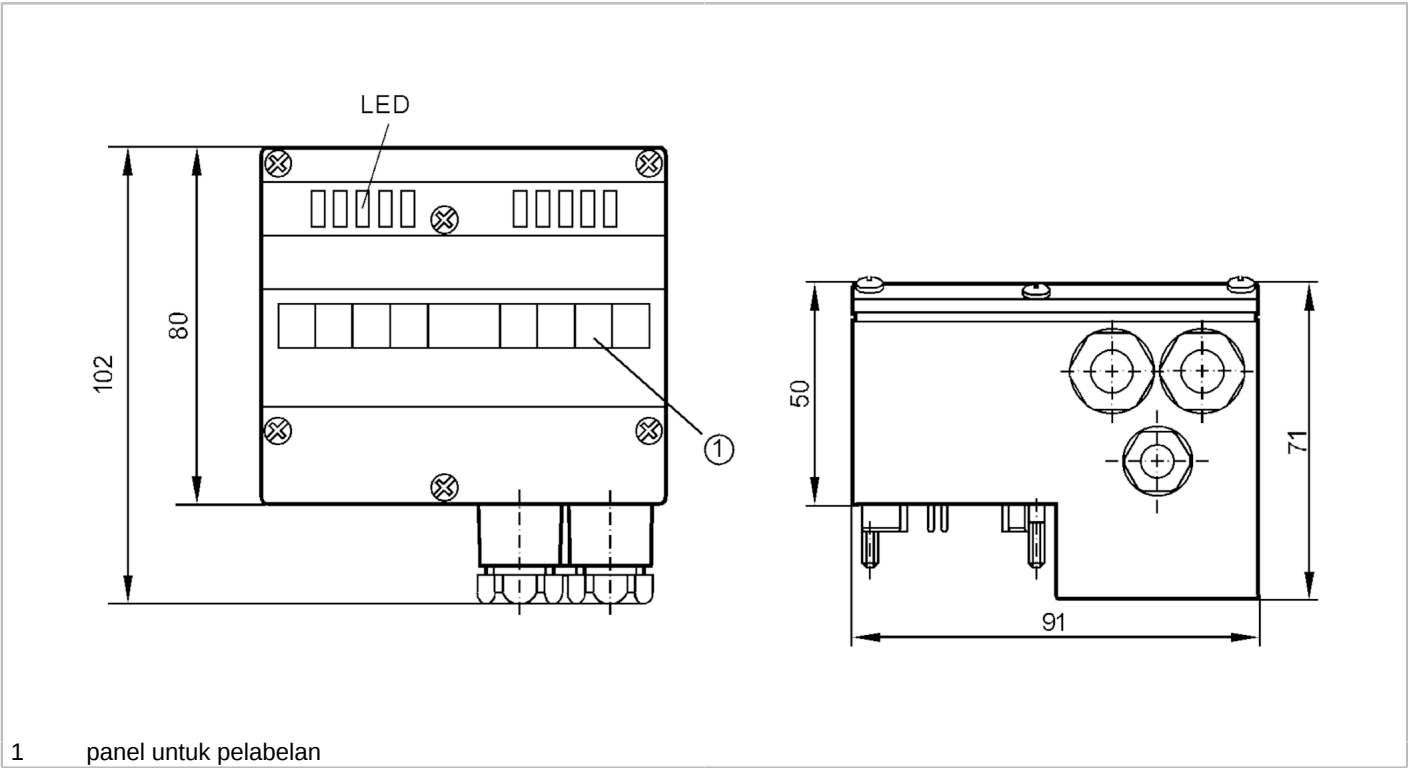

Aplikasi		
Aplikasi		Instalasi di lapangan
Data kelistrikan		
Tegangan pengoperasian	[V]	26.5...31.6 DC
Konsumsi arus maks. dari AS-i	[mA]	140
Pelindung polaritas terbalik		ya
Suplai tegangan tambahan	[V]	24...30 DC; (AUX)
Suplai tegangan tambahan		opsi
Konsumsi arus maksimal dari suplai tambahan	[mA]	550; (AUX)
Input/output		
Jumlah input dan output		Jumlah output analog: 2
Input		
Input analog presisi	[%]	0,5
Output		
Jumlah output analog		2; (koneksi aktuator 2 kawat atau 4 kawat)
Output tegangan analog	[V]	0...10
Resistensi beban min.	[Ω]	3300
Pelindung beban berlebih		ya
Resolusi output analog		16 (1 bit = 1 mV)
Output suplai aktuator		AS-i / AUX



Modul universal AS-Interface

UniversalModule 2AO(V) IP65

Kondisi pengoperasian		
Suhu sekitar	[°C]	0...70
Suhu penyimpanan	[°C]	-25...85
Kelembapan udara relatif maks.	[%]	90; (non kondensasi)
Ketinggian maks. di atas permukaan laut	[m]	2000
Perlindungan		IP 65
Pengujian/persetujuan		
EME	EN 50295	
MTTF	[ANN]	145
Klasifikasi AS-i		
AS-i master profile		M3; M4
Profil AS-i		S-7.3.5
Konfigurasi I/O AS-i	[hex]	7
Kode ID AS-i	[hex]	3.5
Data teknis		
Berat	[g]	296.5
Tipe pemasangan		Interface AS-i untuk bagian bawah FC-E
Material		PBT
Elemen display/pengoperasian		
Display	sinyal analog	LED, kuning saluran AO1...AO2
	operasi	LED, hijau AS-i, AUX
	kesalahan	LED, merah
Koneksi listrik		
Koneksi modul		Kabel pipih
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
klem cage:		




Modul universal AS-Interface

UniversalModule 2AO(V) IP65

pin kontak pada bagian bawah modul, FK / FK-E / PG:

Koneksi

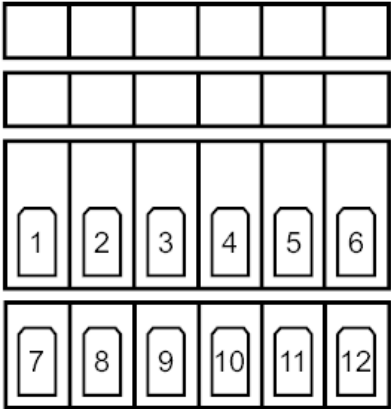

- | | |
|----|---------------------------|
| 1 | O+ suplai aktuator 2 +24V |
| 2 | V2 output analog V |
| 3 | O- suplai aktuator 2 0V |
| 4 | COM 2 output analog 2 0V |
| 5 | Shield |
| 6 | Shield |
| 7 | O+ suplai aktuator 1 +24V |
| 8 | V1 output analog V |
| 9 | O- suplai aktuator 10V |
| 10 | COM 1 output analog 1 0V |
| 11 | FE ground fungsional |
| 12 | FE ground fungsional |