




PWM ke konverter sinyal analog

R360/PWM-ANALOG-MODULE

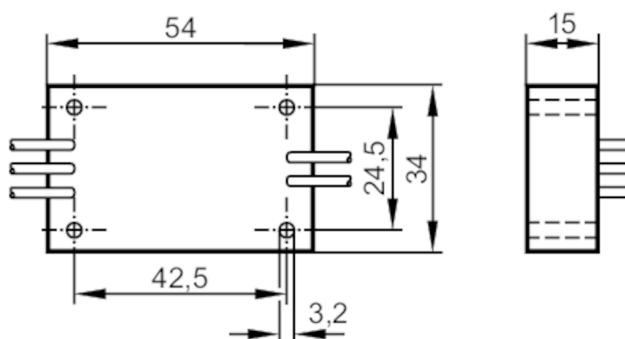

Aplikasi	
Desain	modul casing
Data kelistrikan	
Tegangan pengoperasian [V]	24...30 DC
Konsumsi arus [mA]	< 20
Pelindung polaritas terbalik	ya
Input/output	
Jumlah input dan output	Jumlah output analog: 1
Input	
Jumlah input PWM	1
Input frekuensi PWM [Hz]	122
Output	
Jumlah output analog	1
Output tegangan analog [V]	0...10
Kondisi pengoperasian	
Suhu sekitar [°C]	-40...85
Catatan tentang suhu sekitar	kawat yang ditekuk -5...105 °C kawat dalam keadaan diam -30...105 °C
Perlindungan	IP 67
Data teknis	
Berat [g]	70.5
Dimensi [mm]	54 x 34 x 15
Material	poliamida diperkuat dengan serat kaca
Keterangan	
Jumlah paket	1 buah
Koneksi listrik	
Kabel: 0.28 m; / Ujung core dengan selongsong ujung kawat	
input	
merah	+24 V DC
hitam	PWM IN
biru	GND



PWM ke konverter sinyal analog

R360/PWM-ANALOG-MODULE

Output

hitam	0-10 V
biru	GND

Diagram dan grafik

