


DV1531



Tower lampu 5 segmen dengan output data IO-Link

LED-Tower-5/MDA/Buz

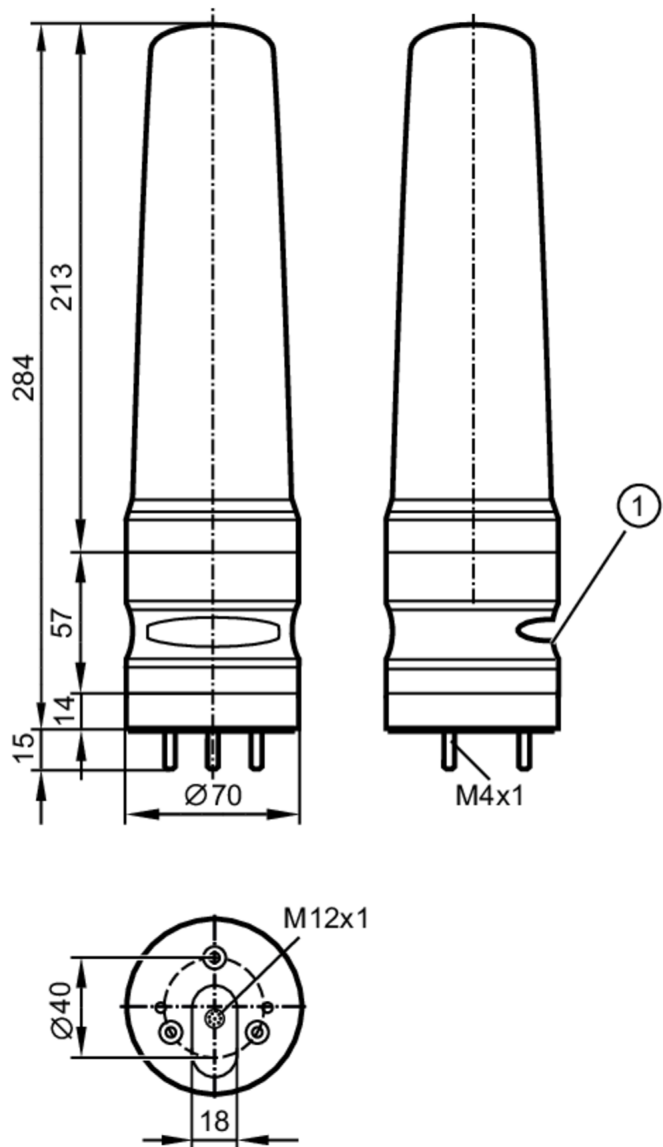

1 buzzer



Aplikasi	
Aplikasi	Tampilan dan transfer status mesin ke software evaluasi di level yang lebih tinggi melalui IO-Link
Data kelistrikan	
Tegangan pengoperasian	[V] 18...30 DC; (sesuai SELV/PELV)
Tegangan nominal DC	[V] 24
Konsumsi arus	[mA] < 200
Input/output	
Jumlah input dan output	Jumlah input digital: 6
Input	
Jumlah input digital	6



Tower lampu 5 segmen dengan output data IO-Link

LED-Tower-5/MDA/Buz

Arus input Tinggi	[mA]	6	
Interface			
Interface komunikasi		IO-Link	
Tipe transmisi		COM2 (38,4 kBaud)	
Revisi O-Link		1.1	
Standar SDCI		IEC 61131-9	
Mode SIO		ya	
Tipe port master yang diperlukan		A	
Waktu siklus proses min.	[ms]	3.2	
DeviceID yang didukung		Tipe operasi	DeviceID
		default	1700
Kondisi pengoperasian			
Suhu sekitar	[°C]	-25...50	
Suhu penyimpanan	[°C]	-40...75	
Kelembapan udara relatif maks.	[%]	90	
Tekanan udara	[kPa]	< 106	
Ketinggian maks. di atas permukaan laut	[m]	2000	
Perlindungan		IP 54	
Data teknis			
Berat	[g]	502.8	
Dimensi	[mm]	Ø 70 / L = 284	
Material		casing: ABS; lensa: PC	
Elemen display/pengoperasian			
Display		status	1 x LED, hijau
		Segmen LED	5 x 4 LED
Sinyal suara		buzzer	
Tekanan suara maks.	[dB]	85	
Aksesori			
Aksesori (opsional)		dudukan pemasangan, E89060	
		braket dinding, E89061	
		Adaptor pemasangan, E89063	
		braket dengan entri kabel lateral, E89064	
		pipa pemasangan, E89065	
		pipa pemasangan, E89066	
		pipa pemasangan, E89067	
Keterangan			
Keterangan		Untuk informasi lebih lanjut, lihat petunjuk pengoperasian.	
Jumlah paket		1 buah	




Tower lampu 5 segmen dengan output data IO-Link

LED-Tower-5/MDA/Buz

Koneksi listrik - colokan

Konektor: M12; pengkodean: A




Koneksi

1	input digital Segmen LED 5
2	buzzer
3	input digital Segmen LED 3
4	input digital Segmen LED 2
5	GND
6	input digital Segmen LED 1
7	input digital Segmen LED 4
8	IO-Link (C/Q)

Diagram dan grafik

pemasangan di kaki



DV1531



Tower lampu 5 segmen dengan output data IO-Link

LED-Tower-5/MDA/Buz

pemasangan di dinding

