


Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ IP

When selecting an alternative article and accessories please note that technical data may differ!

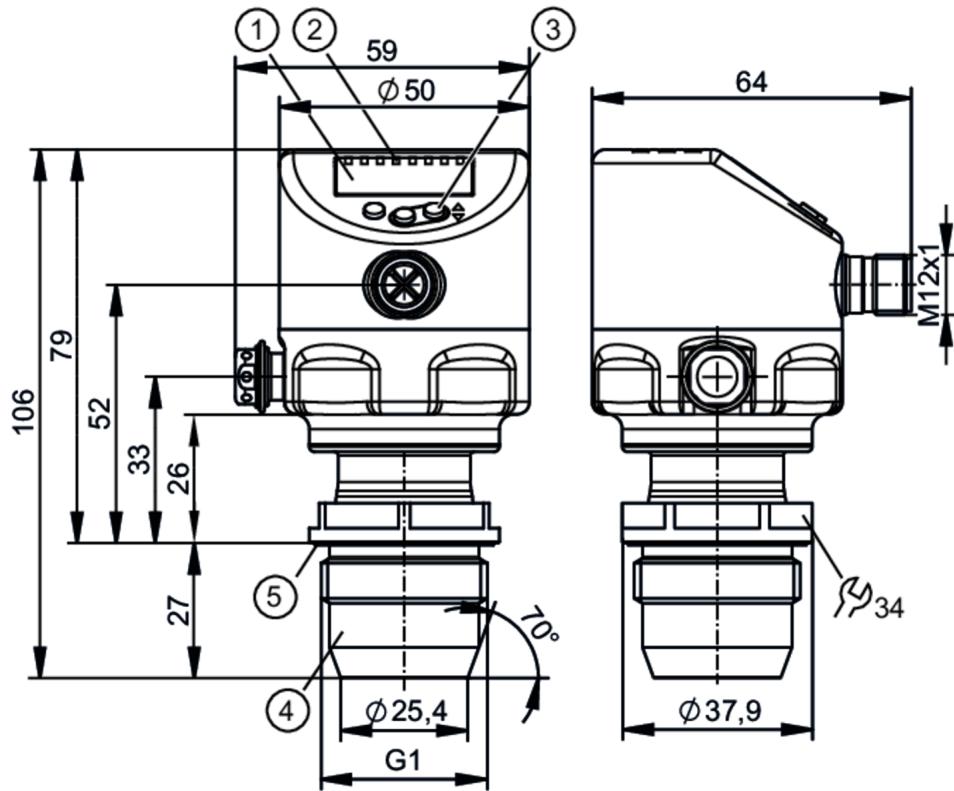

- 1 alphanumeric display 4-digit
- 2 status LEDs
- 3 programming button
- 4 G1 sealing cone external thread
Attention: The unit must only be installed in a process connection for G1 sealing cone.
The G1A sealing cone of the unit is only suited for adapters with metal end stop.
- 5 groove with sealing ring

EC 1935/2004 EHEDG Tested Reg31

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1		
Measuring range	-1...10 bar	-14.6...145 psi	-0.1...1 MPa
Process connection	threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.		

Application

Special feature	Gold-plated contacts		
Application	flush mountable for the food and beverage industry		
Media	viscous media and liquids with suspended particles; liquids and gases		
Medium temperature [°C]	-25...150		
Min. bursting pressure	150 bar	2175 psi	15 MPa
Pressure rating	50 bar	725 psi	5 MPa
Vacuum resistance [mbar]	-1000		
Type of pressure	relative pressure; vacuum		
No dead space	yes		

PI1804



Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ IP

MAWP (for applications according to CRN)	[bar]	50	
Electrical data			
Min. insulation resistance	[MΩ]	100; (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Integrated watchdog		yes	
2-wire			
Operating voltage	[V]	20...30 DC	
Current consumption	[mA]	3.5...21.5	
Power-on delay time	[s]	< 1	
3-wire			
Operating voltage	[V]	18...30 DC	
Current consumption	[mA]	5...45; (430 bei max. Laststrom)	
Power-on delay time	[s]	< 0.5	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		switching signal; analogue signal; IO-Link	
Electrical design		PNP/NPN	
Number of digital outputs		2	
Output function		normally open / normally closed; (parameterisable)	
Number of analogue outputs		1	
Analogue current output	[mA]	4...20, invertible; (scalable)	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
2-wire			
Max. load	[Ω]	300	
3-wire			
Max. voltage drop switching output DC	[V]	2	
Permanent current rating of switching output DC	[mA]	100	
Switching frequency DC	[Hz]	125	
Max. load	[Ω]	(Ub - 10 V) / 21,5 mA; 650 Ω (Ub = 24 V)	
Measuring/setting range			
Measuring range	-1...10 bar	-14.6...145 psi	-0.1...1 MPa
Set point SP	-0.99...10 bar	-14.3...145 psi	-0.099...1 MPa
Reset point rP	-1...9.99 bar	-14.5...144.8 psi	-0.1...0.999 MPa
Analogue start point	-1...8 bar	-14.5...116 psi	-0.1...0.8 MPa
Analogue end point	1...10 bar	14.5...145 psi	0.1...1 MPa

Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ /P

Min. difference between SP and rP	0.02 bar	0.3 psi	0.002 MPa
In steps of	0.01 bar	0.1 psi	0.001 MPa
Factory setting		SP1 = 2.50 bar	rP1 = 2.30 bar
		SP2 = 7.50 bar	rP2 = 7.30 bar
		ASP = 0.00 bar	AEP = 10.00 bar
		dAP = 0.06 s	dAA = 0.06 s
Temperature monitoring			
Measuring range	-25...150 °C	-13...302 °F	
Accuracy / deviations			
Switch point accuracy [% of the span]		< ± 0,2; (DIN EN IEC 62828-1; Turn down 1:1)	
Repeatability [% of the span]		< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation [% of the span]		< ± 0,2; (DIN IEC EN 62828-1 incl. zero point and span error, non-linearity, hysteresis; Turn down 1:1)	
Linearity deviation [% of the span]		< ± 0,15; (Turn down 1:1)	
Hysteresis deviation [% of the span]		< ± 0,15; (Turn down 1:1)	
Long-term stability [% of the span]		< ± 0,1; (Turn down 1:1; per year)	
Total deviation over temperature range			
	Temperature range	total deviation	
	-25...15 °C	Characteristics deviation ± 0,05 % of the span / 10 K	
	15...80 °C	Characteristics deviation	
	80...150 °C	Characteristics deviation ± 0,1 % of the span / 10 K	
Notes on the accuracy / deviation		for further details see section Diagrams and graphs	
Temperature monitoring			
Accuracy [K]		± 2,5+ (0,08 x (Umgebungstemperatur - Mediumtemperatur))	
Repeatability [K]		± 0,2	
Resolution [K]		0.2	
Response times			
Damping process value dAP [s]		0...99.99	
Damping for the analogue output dAA [s]		0...99.99	
2-wire			
Step response time analogue output [ms]		30	
3-wire			
Min. response time of switching output (dAP) [ms]		3	
Step response time analogue output [ms]		7	
Temperature monitoring			
Dynamic response T05 / T09 [s]		< 35 / < 135; (DIN EN 60751 water ; > 0,9 m/s)	

PI1804



Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ IP

Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles		Identification and Diagnosis (0x4000), Measurement Data Channel (0x800A)
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	5.6
IO-Link resolution pressure	[bar]	0.0005
IO-Link resolution temperature	[K]	0.2
IO-Link process data (cyclical)	function	bit length
	pressure	32
	temperature	32
	device status	4
	binary switching information	2
IO-Link functions (acyclical)	application specific tag; internal temperature; operating hours counter; switching cycles counter; Pressure peak counter	
Supported DeviceIDs		Type of operation
		DeviceID
	default	1156
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 68; IP 69K
Tests / approvals		
EMC		DIN EN 61326-1
Shock resistance		DIN EN 60068-2-27
Vibration resistance		DIN EN 60068-2-6
MTTF	[years]	214
Note on approval	factory certificate available as download at www.factory-certificate.ifm	
UL approval	UL Approval no.	J049
	File number UL	E174189
Mechanical data		
Weight	[g]	385.2
Materials		stainless steel (316L/1.4404); FKM; PTFE; PBT; PEI; PFA
Materials (wetted parts)		ceramics (99.9 % Al2O3); stainless steel (316L/1.4435); surface characteristics: Ra < 0,4 / Rz 4; PTFE
Min. pressure cycles		100 million
Tightening torque	[Nm]	20
Process connection	threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.	

Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ /P

Displays / operating elements

Display	Display unit switching status function display measured values	LED, green LED, yellow alphanumeric display, 4-digit alphanumeric display, 4-digit
Display unit		bar; psi; MPa

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection


Connector: 1 x M12; coding: A; Contacts: gold-plated



Flush pressure sensor with display

PI-010-REA01-MFRKG/USI /P

Connection

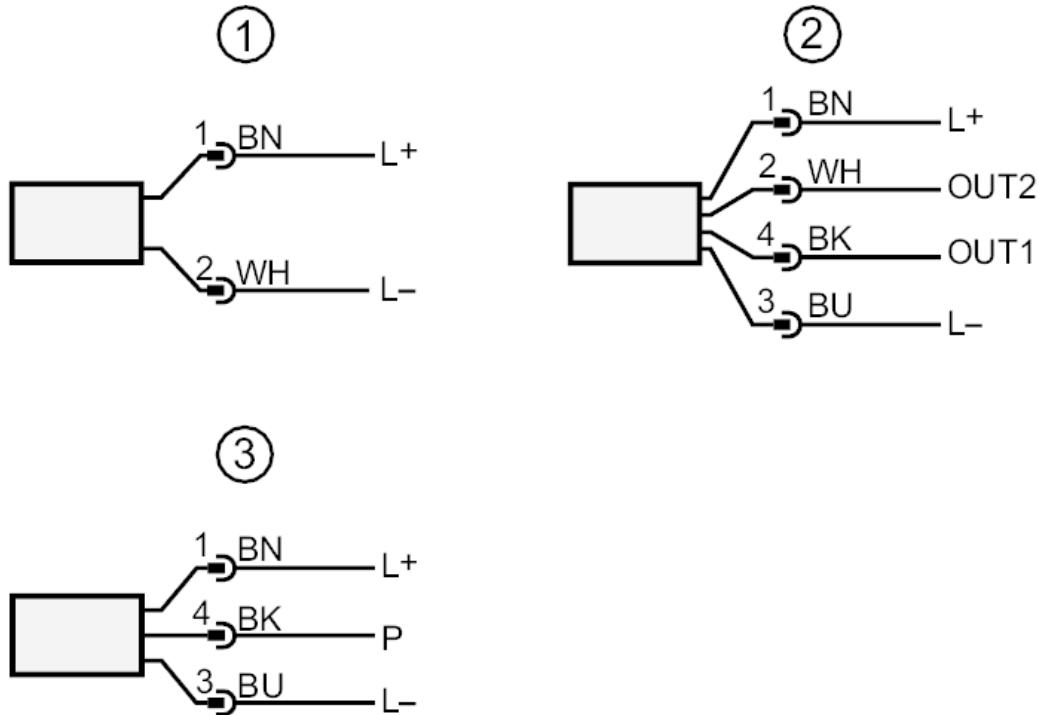

- 1 connection for 2-wire operation
- 2 connection for 3-wire operation
- OUT1 switching output / IO-Link
- OUT2 switching output / analogue output
- 3 connection for IO-Link parameter setting (P = communication via IO-Link)

colours to DIN EN 60947-5-2
Core colours
BK = black
BN = brown
BU = blue
WH = white

Flush pressure sensor with display

PI-010-REA01-MFRKG/US/ /P

Diagrams and graphsambient temperature influence on
the accuracy