




AS-Interface control cabinet module

SmartLine25 4DI 4DO A/B T C

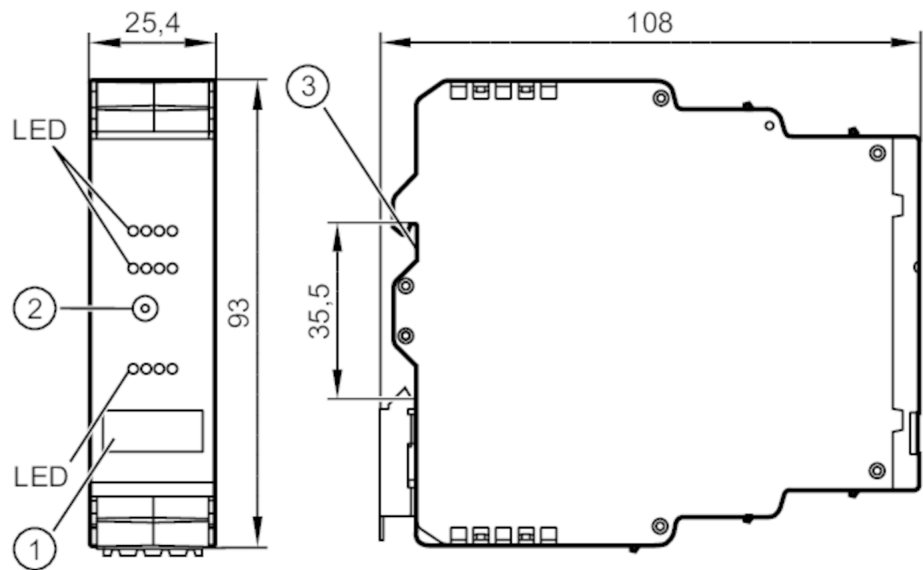

- 1 panel for labelling
- 2 Addressing socket
- 3 DIN rail adapter



Application		
Design		Only for operation with AS-i masters with the profile M4
Application		I/O modules for control cabinet installations
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	250
Additional voltage supply	[V]	20...30 DC
Max. current consumption from additional supply	[mA]	4000; (AUX)
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4	
Inputs		
Number of digital inputs		4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)	
Sensor supply of the inputs	AS-i	
Voltage supply	[V]	18...30; (DC)
Max. total current rating of inputs	[mA]	200



AS-Interface control cabinet module

SmartLine25 4DI 4DO A/B T C

Input current High	[mA]	6...10
Input current low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

Outputs

Number of digital outputs		4
Circuit		PNP
Voltage range DC	[V]	20...30; (AUX)
Max. current load per output	[mA]	1000; (utilization category DC-12: 700 mA; utilization category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	4
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX

Operating conditions

Ambient temperature	[°C]	-25...70
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 60 °C
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Degree of soiling		2

Tests / approvals

EMC		EN 61000-6-2	
		EN 62026-2	
		EN 50581	
MTTF	[years]	235	
Notes		The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.	

AS-i classification

AS-i version		3.0			
AS-i addressing		Addressing socket			
Extended addressing mode		yes			
AS-i master profile		M4			
AS-i profile		S-7.A.7			
AS-i I/O configuration	[hex]	7			
AS-i ID code	[hex]	A.7			
AS-i certificate		60702			
Data bits		Data bit	D0	D1	D2
		Input	I-1	I-2	I-3
		Output	O-1	O-2	O-3
					D3
					I-4
					O-4

Mechanical data

Weight	[g]	150
--------	-----	-----



AS-Interface control cabinet module

SmartLine25 4DI 4DO A/B T C

Type of mounting	Mounting on DIN rail
Material	PC-GF20

Displays / operating elements

Display	Switching status	LED, yellow I1...I4, O1...O4
	Power	LED, green AS-i, AUX
	errors	LED, red

Accessories

Accessories (optional)	connector
------------------------	-----------

Remarks

Remarks	Do not connect any of the following points to an external potential:
	I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

Electrical connection

pin header:

Connection

I-	I-	I-	I-
I1	I2	I3	I4
I+	I+	I+	I+

O-	O-	O-	O-
O1	O2	O3	O4
A+	A-	E+	E-

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
E+	Actuator supply +24V
E-	Actuator supply 0V
I1...I4	Switching input sensor 1...4
O1...O4	Switching output actuator 1...4
O-	Switching output actuator 0V