

N05204




Switching amplifiers for Namur sensors

NV0201 20-30VDC,RL

Article no longer available - archive entry

Alternative articles: N0533A
When selecting an alternative article and accessories please note that technical data may differ!

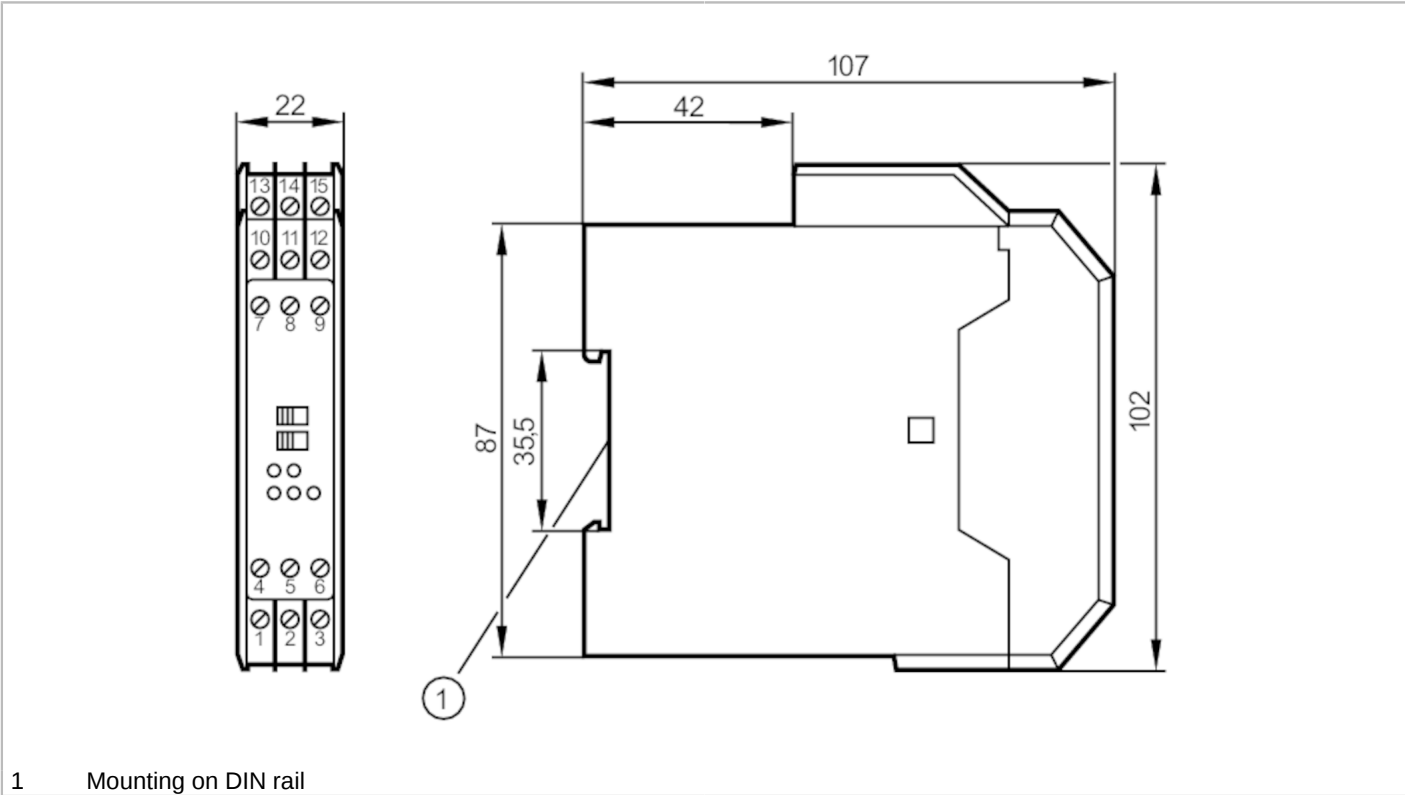

Application	
Application	short-circuit monitoring; Wire break monitoring
Electrical data	
Operating voltage tolerance [%]	-15...20
Operating voltage [V]	20...30 DC
Number of channels	2
Outputs	
Electrical design	Relay
Contact rating	5 A, 250 V AC / 100 VA
Switching frequency DC [Hz]	20
Operating conditions	
Ambient temperature [°C]	-20...60
Protection	IP 30
Protection rating terminals	IP 20
Tests / approvals	
Approval	PTB Ex-95.C.2142X



Switching amplifiers for Namur sensors

NV0201 20-30VDC,RL

Safety classification	
Description	in protection rating intrinsic safety
Voltage [V]	< 11
Current [mA]	< 26
Power [mW]	< 72
[Ex ia] IIC designation	[EEx ia] IIC
[Ex ia] IIB designation	[EEx ia] IIB
[Ex ib] IIC designation	[EEx ib] IIC
[Ex ib] IIB designation	[EEx ib] IIB
[Ex ia] IIC inductance	1mH / 2mH / 5mH
[Ex ia] IIB inductance	1mH / 2mH / 5mH
[Ex ib] IIC inductance	46mH
[Ex ib] IIB inductance	170mH
[Ex ia] IIC capacitance	567nF / 581nF / 483nF
[Ex ia] IIB capacitance	2.5μF / 2.2μF / 1.8μF
[Ex ib] IIC capacitance	2.5μF
[Ex ib] IIB capacitance	15μF


Mechanical data	
Housing	housing for DIN rail mounting
Dimensions [mm]	102 x 22 x 107

Displays / operating elements		
Display	Switching status	2 x LED, yellow
	Power	LED, green
	Function	2 x LED, red

Remarks	
Pack quantity	1 pcs.

Electrical connection	
terminals: 15 x ...2.5 mm ²	

Connection	
------------	--

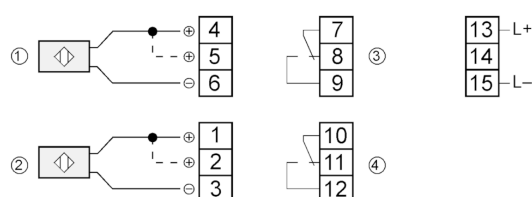

- 1: sensor 1
 2: sensor 2
 3: Relais 1
 4: Relais 2
 bridge 4-5 / 1-2 = without wire-break monitoring