


**Retro-reflective sensor**

OLP-FPKG/US-100

Article no longer available - archive entry

Alternative articles: O5P500 + E21122

When selecting an alternative article and accessories please note that technical data may differ!

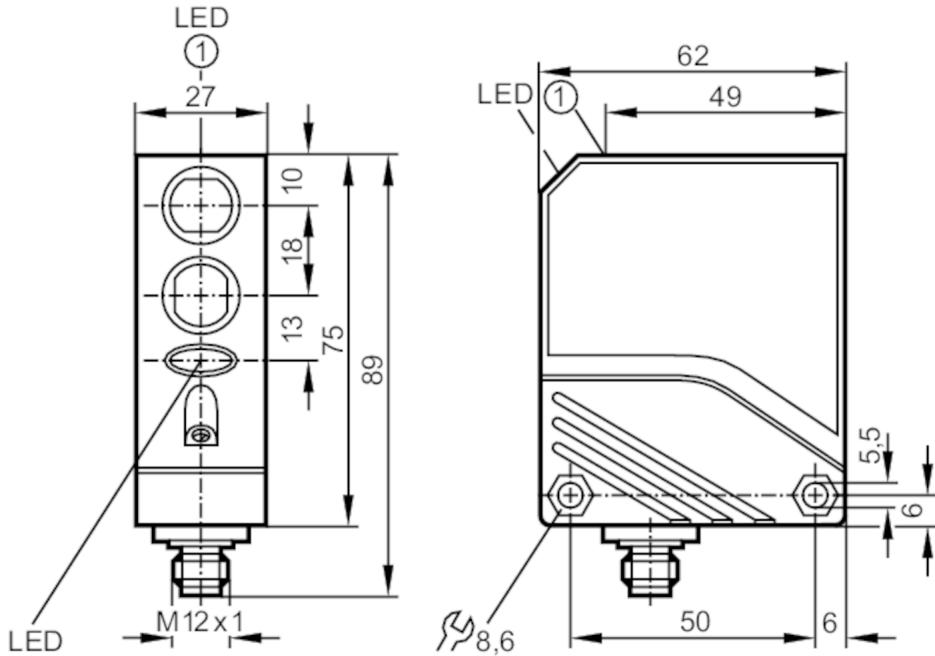

1 pushbutton

**Product characteristics**

Type of light red light

Housing rectangular

**Application**

System polarization filter

Function principle Retro-reflective sensor

**Electrical data**

Operating voltage [V] 10...36 DC

Current consumption [mA] &lt; 37

Protection class II

Reverse polarity protection yes

Type of light red light

Wave length [nm] 660

**Outputs**

Electrical design PNP

Output function light-on/dark-on mode; (configurable)

Max. voltage drop switching [V] output DC 2.5

Max. voltage drop of function [V] check output 3.5


# OL5003



## Retro-reflective sensor

OLP-FPKG/US-100


Max. current load for function check output [mA]	10	
Permanent current rating of switching output DC [mA]	100; (200 (...50 °C))	
Switching frequency DC [Hz]	500	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
<b>Monitoring range</b>		
Range [m]	0.3...5; (Prismatic reflector Ø 80 E20005)	
Range referred to prismatic reflector [m]	0.3...5; (Prismatic reflector Ø 80 E20005)	
Range adjustable	yes	
Max. light spot diameter [mm]	250	
Light spot dimensions refer to	at maximum range	
Polarization filter available	yes	
<b>Operating conditions</b>		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
<b>Tests / approvals</b>		
EMC	EN 60947-5-2	
	EN 55011	
	class B	
<b>Mechanical data</b>		
Housing	rectangular	
Dimensions [mm]	75 x 27 x 62	
Material	PA; PBT	
Lens material	PMMA	
<b>Displays / operating elements</b>		
Display	Switching status Power Function	1 x LED, yellow 1 x LED, green 1 x LED, red
<b>Remarks</b>		
Pack quantity	1 pcs.	
<b>Electrical connection</b>		
Connector: 1 x M12; coding: A		



## Retro-reflective sensor

OLP-FPKG/US-100

### Connection

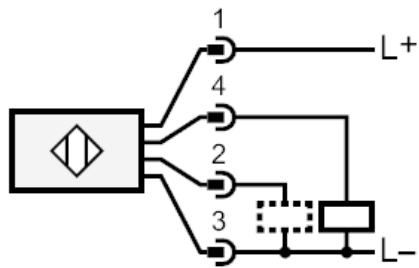

2

Function check output

### Diagrams and graphs

excess gain graph

