


RO6341



Incremental encoder with hollow shaft

RO-0360-I24/T U

Article no longer available - archive entry

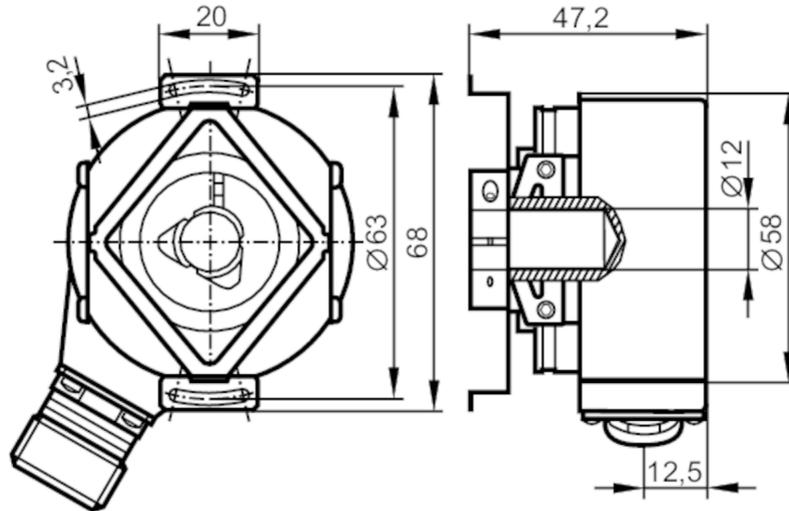

Product characteristics

| | |
|---------------------|-------------------------------|
| Resolution | 360 resolution |
| Shaft design | hollow shaft open to one side |
| Shaft diameter [mm] | 12 |

Application

| | |
|--------------------|-------------|
| Function principle | incremental |
|--------------------|-------------|

Electrical data

| | |
|--------------------------|------------|
| Operating voltage [V] | 10...30 DC |
| Current consumption [mA] | < 200 |

Outputs

| | |
|-----------------------------------|--------|
| Electrical design | HTL |
| Max. current load per output [mA] | 50 |
| Switching frequency [kHz] | 300 |
| Type of short-circuit protection | < 60 s |
| Phase difference A und B [°] | 90 |

Measuring/setting range

| | |
|------------|----------------|
| Resolution | 360 resolution |
|------------|----------------|

Operating conditions

| | |
|--------------------------------|---|
| Ambient temperature [°C] | -40...100 |
| Max. relative air humidity [%] | 98 |
| Protection | IP 64; (on the housing: IP 67; on the shaft: IP 64) |

Tests / approvals

| | |
|------------------|--------------|
| Shock resistance | 100 g (6 ms) |
|------------------|--------------|

RO6341




Incremental encoder with hollow shaft

RO-0360-I24/T U

| | | |
|-------------------------------|---------|---|
| Vibration resistance | | 10 g (55...2000 Hz) |
| Mechanical data | | |
| Weight | [g] | 405 |
| Dimensions | [mm] | Ø 58 / L = 47.2 |
| Material | | aluminum |
| Max. revolution, mechanical | [U/min] | 12000 |
| Max. starting torque | [Nm] | 1 |
| Reference temperature torque | [°C] | 20 |
| Shaft design | | hollow shaft open to one side |
| Shaft diameter | [mm] | 12 |
| Shaft fit | | H7 |
| Shaft material | | stainless steel |
| Installation depth/shaft | [mm] | 10 |
| Max. axial shaft misalignment | [mm] | 1; (max. radial shaft alignment: ± 0,05 mm) |

Electrical connection

Connector: 1 x M18 (ifm 1001.20), radial



| | |
|--------|------------------|
| A | B inverted |
| B | Ub sensor |
| C | 0 index |
| D | 0 index inverted |
| E | A |
| F | A inverted |
| G | error inverted |
| H | B |
| K | 0V Un |
| L | 0V sensor |
| M | L+ Up |
| screen | housing |

Diagrams and graphs

| | |
|---------------|---|
| Pulse diagram | <p>Direction of rotation clockwise (looking at the shaft)</p> |
|---------------|---|