




# Procedure to update device catalog for Master Display E30443




1. Connect the display to the PC via the IO-Link master (E30390 USB master or other master block via Ethernet).

Ensure device catalogs are up to date. This can be accessed via the Cloud icon.


- Select cloud symbol.
- Download window will open.
- Select all available updates and click ok.

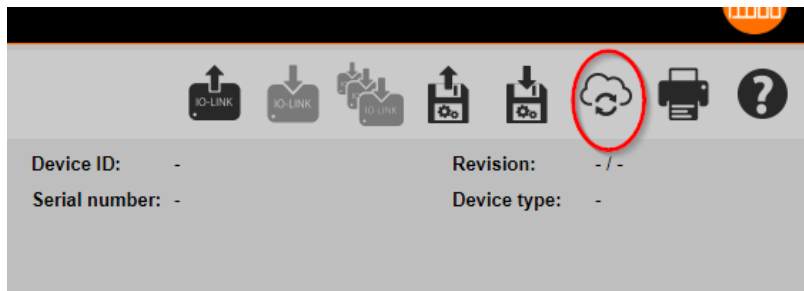

2. Click the Read [Read from device] button.

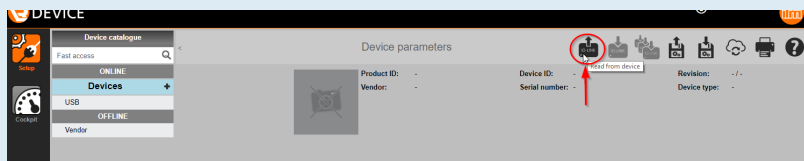


- 2a. If using the USB Master, the device will show up under USB.

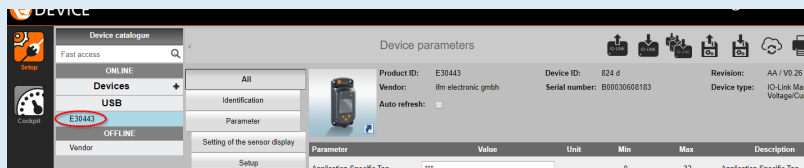


- 2b. When using an AL series master block, you must select the port to which the desired device is connected.

- The parameters of the E30443 are then displayed in the LR DEVICE software main screen.

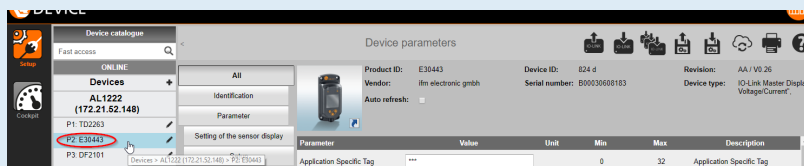

3. Type the part number, E30443, in the device search bar and select the "E30443\_Catalogue\_Update (E30443)" as shown:

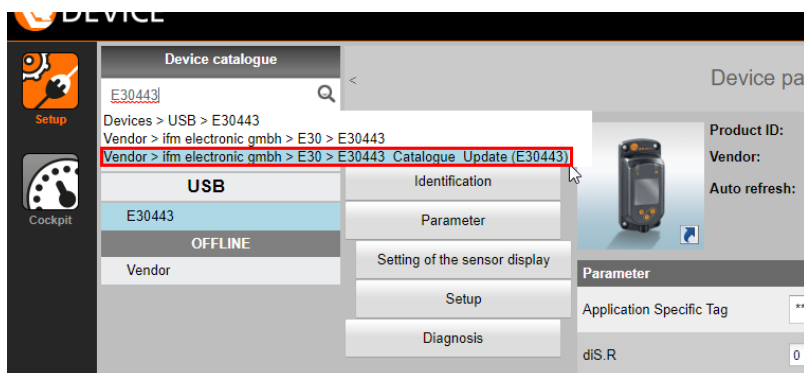




# Procedure to update device catalog for Master Display E30443




4. Write the device catalog to the display by clicking the icon for "Write to multiple selected devices" as shown:
  - A new window will pop up.



5. Select the E30443 by clicking the check box and confirm by clicking [OK]. The column for "Compatible" showing "No" can be ignored.

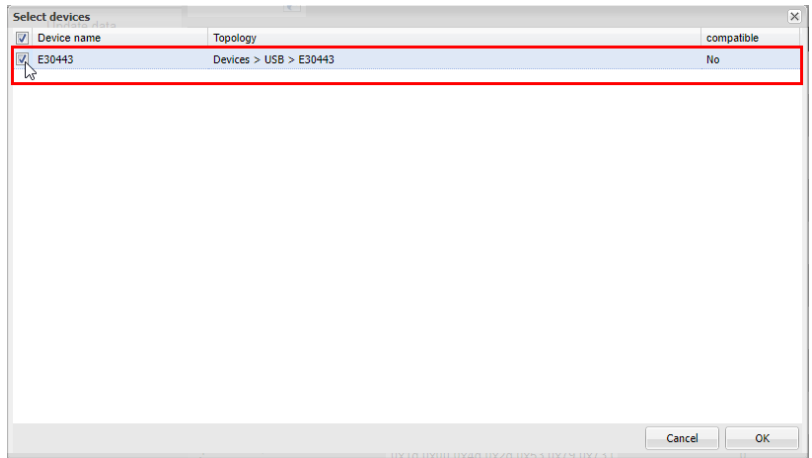

- LR DEVICE software will then write the data to the display. This puts the display in catalog mode. You will see this if you click on the device once again:

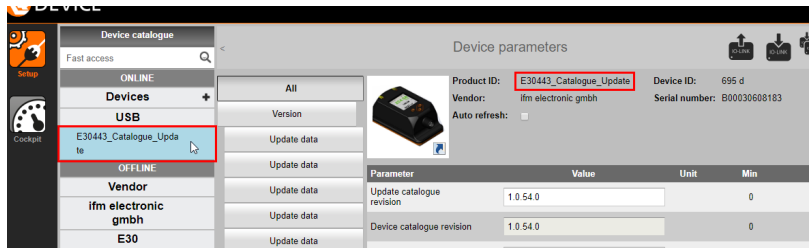


- Now the device must be changed from Catalog Mode back to Operating Mode.



# Procedure to update device catalog for Master Display E30443



6. Repeat the process from step 3 above by typing the E30443 part number in the device catalogue search box, only this time select the entry for the E30443 without the catalogue\_update as shown:

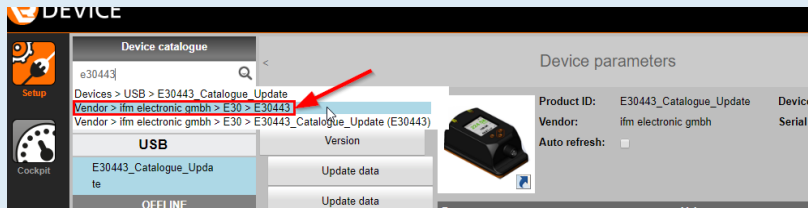


- These parameters will be loaded, then repeat steps 4-5 above again:

- Write the device catalog to the display by clicking the icon for "Write to multiple selected devices" as shown:




- A new window will pop up.

- Select the E30443 by clicking the check box and confirm by clicking [OK]. The column for "Compatible" showing "No" can be ignored.

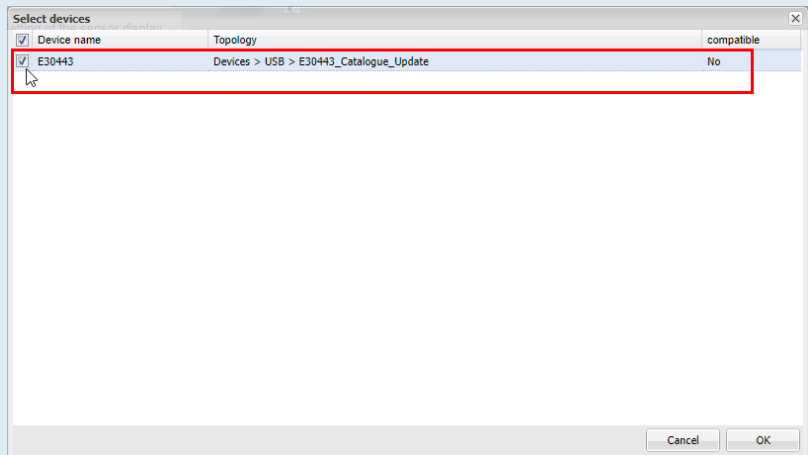

- LR DEVICE software will then write the data to the display. This puts the display back in Operating mode.

You will see this if you click on the device once again:

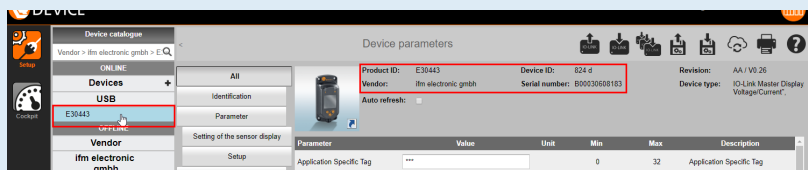

E30443 is now up to date.