


## Evaluation unit for slip and synchronous monitoring

MONITOR/FS-1N/110-240VAC/DC

Article no longer available - archive entry

Alternative articles: DS2503

When selecting an alternative article and accessories please note that technical data may differ!

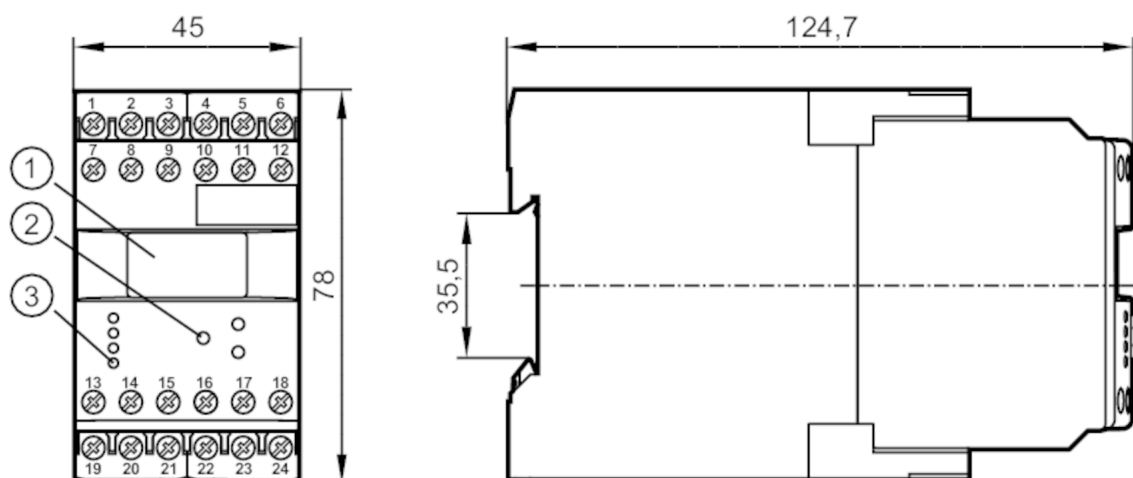

- 1 OLED display
- 2 programming buttons
- 3 LEDs



### Product characteristics

Housing	housing for DIN rail mounting
Dimensions [mm]	78 x 45 x 124.7

### Application

Application	pulse evaluation system with microprocessor for slip and synchronous monitoring as well as frequency and rotational speed
-------------	---

### Electrical data

Nominal voltage AC [V]	110...240
Nominal voltage DC [V]	27
Nominal voltage tolerance [%]	< 10
Nominal voltage tolerance 2 [%]	20...10
Nominal frequency AC [Hz]	50...60
Power consumption [W]	3
Auxiliary energy for sensors DC [V]	8.2

### Inputs / outputs

Number of inputs and outputs	Number of relay outputs: 2
------------------------------	----------------------------

### Outputs

Number of relay outputs	2
Contact rating	6 A (250 V AC); B300, R300

### Measuring/setting range

Setting range Hz [Hz]	0.1...1000
-----------------------	------------



## Evaluation unit for slip and synchronous monitoring

MONITOR/FS-1N/110-240VAC/DC

Setting range	[Imp/min]	1...60000
---------------	-----------	-----------

### Operating conditions

Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	80; (40 °C: 50 %)
Protection		IP 50
Protection rating terminals		IP 20

### Tests / approvals

EMC	EN 61010	2011
	EMV 89/336/EWG	
	EN 61000-6-2	2005
	EN 61000-6-4	2007

### Mechanical data

Weight	[g]	386
Housing		housing for DIN rail mounting
Dimensions	[mm]	78 x 45 x 124.7
Materials		plastics

### Displays / operating elements

Display		OLED display, 128 x 64 pixels luminous
	switching status	LED, green

### Remarks

Remarks	The unit complies with overvoltage category II; pollution degree 2
---------	--

### Electrical connection

dual-chamber terminals: 2 x ...2.5 mm<sup>2</sup>; AWG 14

1	DC supply voltage (L-)
2	DC supply voltage (L+)
3	current supply transistor outputs (L+)
4	error output 1
5	8.2 V DC Sensor supply 1 (L-)
6	8.2 V DC Sensor supply 1 (L+)
7	AC supply voltage (L)
8	AC supply voltage (N)
9	not used
10	error output 2
11	8.2 V DC Sensor supply 2 (L-)
12	8.2 V DC Sensor supply 2 (L+)
13	relay 1 common
14	relay 1 normally open
15	relay 1 normally closed
16	transistor output 1 pnp
17	reset 1 pnp
18	reset 2 pnp
19	relay 2 common
20	relay 2 normally open
21	relay 2 normally closed
22	not used
23	not used
24	transistor output 2 pnp