


Fibre-optic amplifier

OO5-FNKG/M12/KL4

Article no longer available - archive entry

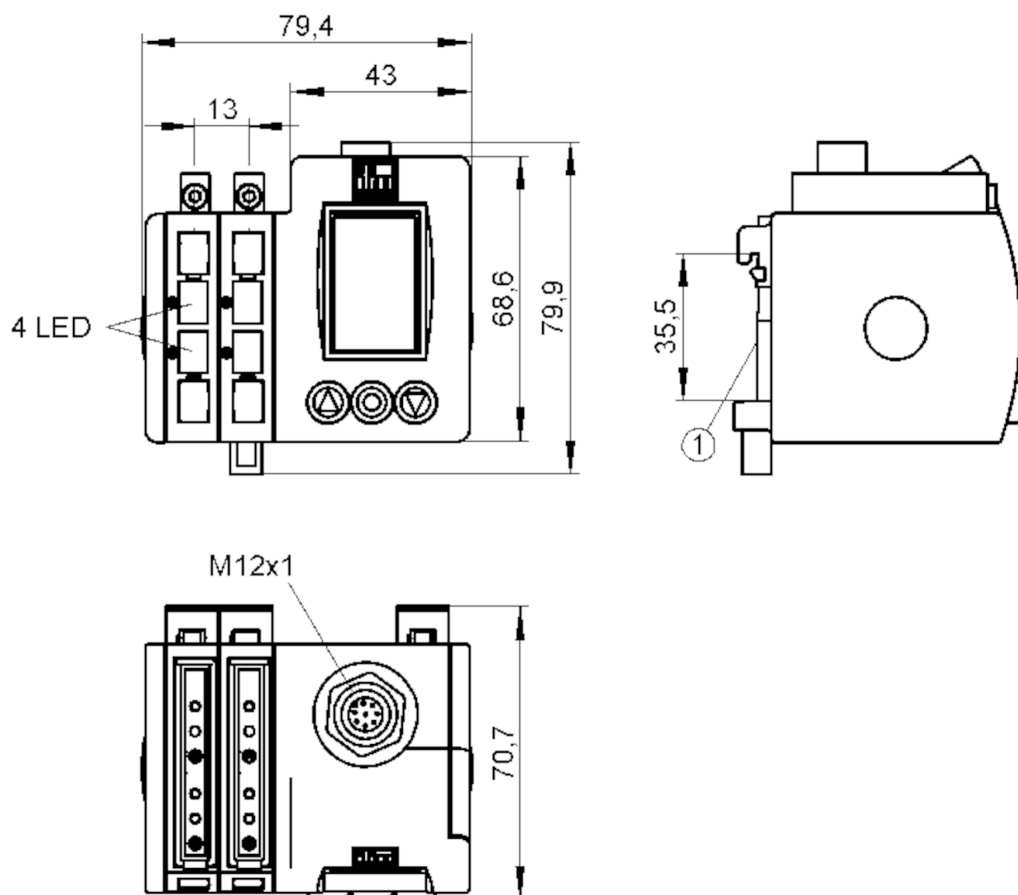

1 mounting on DIN rail

Product characteristics

Type of light	red light
Housing	rectangular

Application

Special feature	Function check output
-----------------	-----------------------

Electrical data

Operating voltage	[V]	12...36 DC
Current consumption	[mA]	50; ((24 V))
Max. power consumption	[VA]	1.2
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	630

Outputs

Electrical design	NPN
Output function	light-on/dark-on mode; (parameterisable)



Fibre-optic amplifier

00F-FNKG/M12/KL4


Max. voltage drop switching output DC	[V]	2
Function check output		yes
Max. current load for function check output	[mA]	200
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1500
Notes on switching frequency	[Hz]	typical
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Time function	[s]	0.001...0.1
Detection zone		
Range	[m]	< 3.8; (Through-beam sensor)
Range	[mm]	0...300; (Diffuse reflection sensor)
Range adjustable		yes
Software / programming		
Parameter setting options		automatic and manual switch point setting; logic functions AND, OR; second switch point
Operating conditions		
Ambient temperature	[°C]	-20...60
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Weight	[g]	0.496
Housing		rectangular
Dimensions	[mm]	79.9 x 79.4 x 70.7
Number of channels		4
Fibre optic connection		FE-11 / FT-11
Materials		housing: ABS; display window: PMMA; LED window: SEPS; cover: diecast zinc plastic coated (PA)
Displays / operating elements		
Display		full graphic LCD display, rotation of the display by 180° possible language selection (German, English, French)
	switching status	4 x LED, yellow
Electronic lock		yes
Accessories		
Items supplied		rail: 1 x 68 mm, EN 60715
Remarks		
Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.

Fibre-optic amplifier


OO5-FNKG/M12/KL4

Electrical connection

Connector: 1 x M12; coding: A



Connection

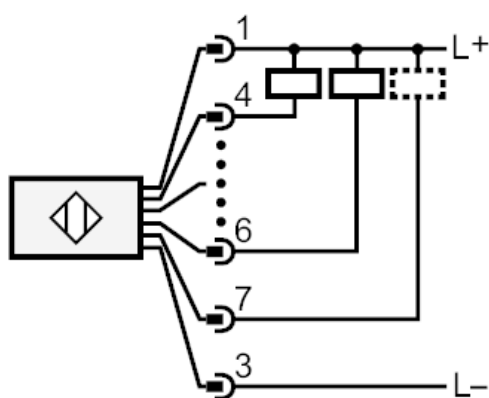

4: Out 1
2: Out 2
5: Out 3
6: Out 4

7 Function check output