


# O6S305



## Through-beam sensor transmitter

O6S-00KG/AS/4P

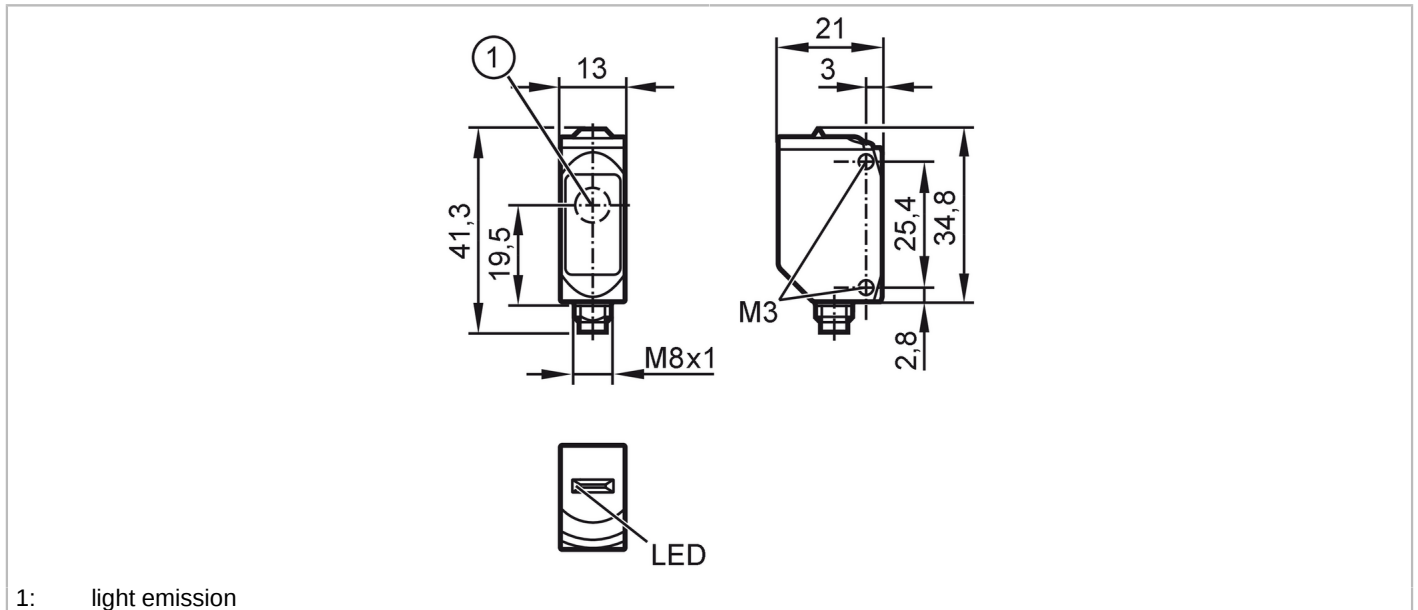

1: light emission



Product characteristics	
Type of light	red light
Housing	rectangular
Application	
Function principle	Through-beam sensor
Application	food and beverage industry
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	11; ((24 V))
Protection class	III
Type of light	red light
Wave length [nm]	633
Detection zone	
Transmitter / receiver	transmitter
Range [m]	< 10
Max. light spot diameter [mm]	300
Light spot dimensions refer to	at maximum range
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
Profiles	Smart Sensor - SSP 0      Generic Profiled Sensor
Function	Device identification
SIO mode	yes
Required master port type	A

# O6S305



## Through-beam sensor transmitter

O6S-OOKG/AS/4P

Min. process cycle time	[ms]	2.5
IO-Link process data (cyclical)	<b>function</b>	<b>bit length</b>
IO-Link functions (acyclical)	process value	8
Supported DeviceIDs	application specific tag; operating hours counter; switching cycles counter	
	<b>Type of operation</b>	<b>DeviceID</b>
	default	420

<b>Operating conditions</b>		
Ambient temperature	[°C]	-25...80
Protection		IP 65; IP 67; IP 68; IP 69K

<b>Tests / approvals</b>		
EMC		EN 60947-5-2
MTTF	[years]	1239
UL approval	Ta	-25...40 °C
	Enclosure type	Type 1
	power supply	Class 2
	UL approval no.	E011

<b>Mechanical data</b>		
Weight	[g]	33.8
Housing		rectangular
Dimensions	[mm]	34.8 x 13 x 21
Materials		housing: stainless steel (316L/1.4404); Sealing: EPDM; plastics: PPSU
Lens material		front pane:PMMA
Lens alignment		side lens
Tightening torque	[Nm]	1; (screws)

<b>Displays / operating elements</b>		
Display	operation	1 x LED, green

<b>Remarks</b>		
Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.

### Electrical connection

Connector: 1 x M8; coding: A; Contacts: 4






## Through-beam sensor transmitter

O6S-OOKG/AS/4P


### Connection

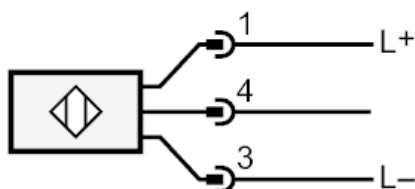

4 IO-Link

### Diagrams and graphs

excess gain graph

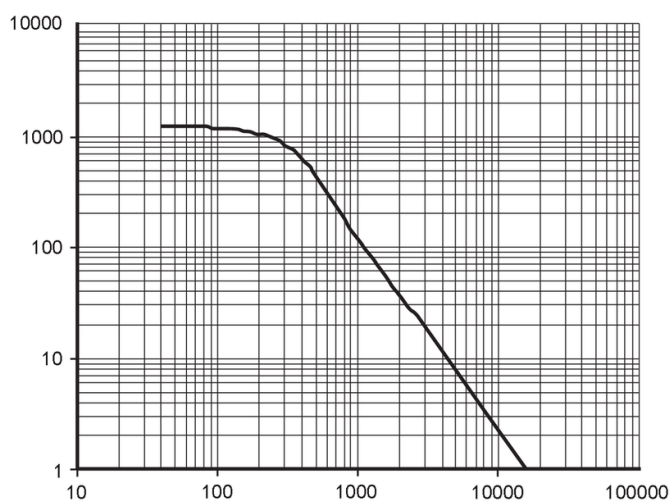

x: distance [mm]

y: excess gain factor