


EC0454



Prewired jumper with contact housing

BasicCable/Display 5m

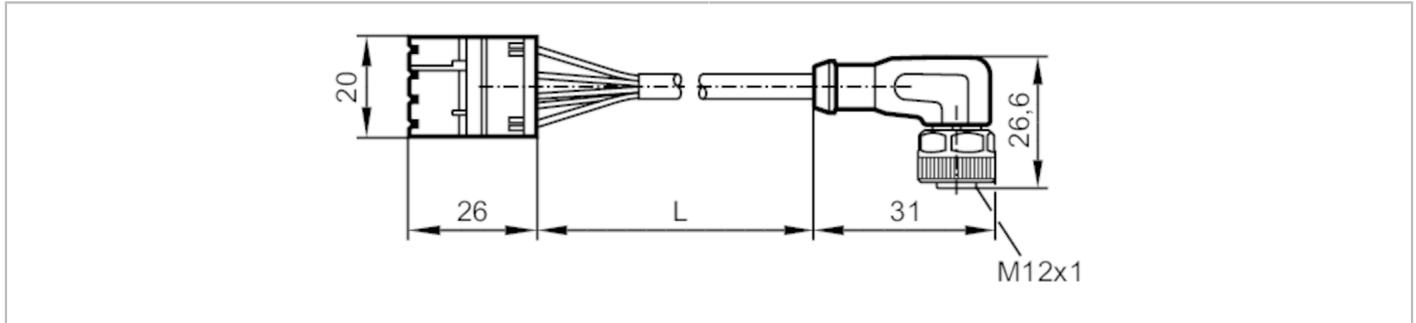


Application	
Design	wired, for BasicController and BasicDisplay, 1 x CR04xx, 1 x CR045x
Application	power supply; CAN bus
Operating conditions	
Ambient temperature	[°C] -40...85
Mechanical data	
Weight	[g] 194.4
Remarks	
Remarks	CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector
Pack quantity	1 pcs.

Electrical connection

Cable: 5 m; 5 x 0.34 mm²

Connection

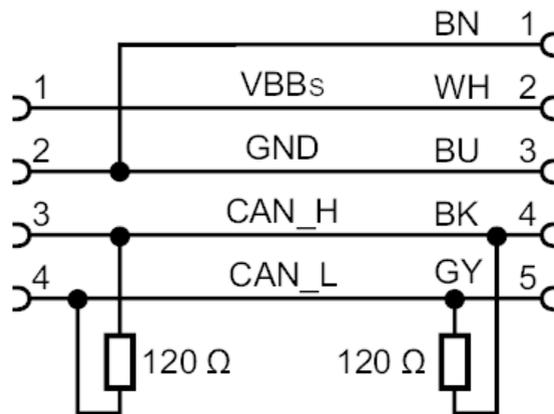

- Core colours :
- BK = black
 - BN = brown
 - BU = blue
 - GY = grey
 - WH = white

Connector: 1 x M12