




Inductive dual sensor for valve actuators

IND3004DBPKG/3D

Article no longer available - archive entry

Alternative articles: IN512A

When selecting an alternative article and accessories please note that technical data may differ!

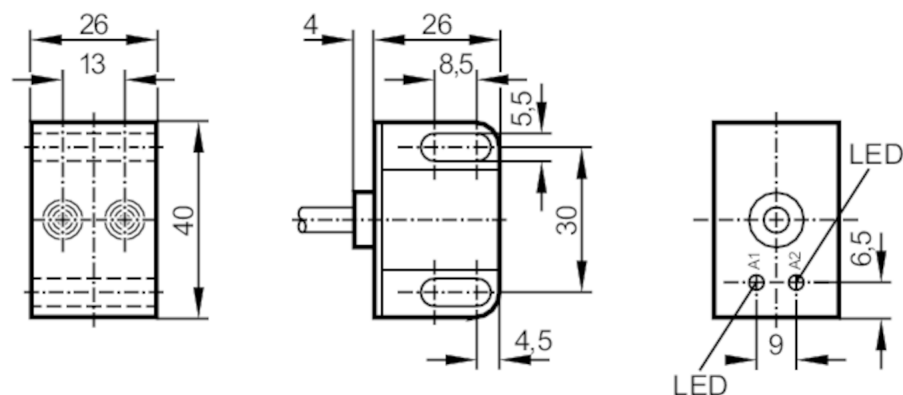

Product characteristics

Electrical design	PNP
Output function	2 x normally open
Sensing range [mm]	4
Housing	rectangular
Dimensions [mm]	40 x 26 x 26

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	2 x normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Short-time current rating of switching output [mA]	100
Switching frequency DC [Hz]	1300
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	4
--------------------	---

IN508A



Inductive dual sensor for valve actuators

IND3004DBPKG/3D

Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.2
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-20...60
Protection		IP 67
Tests / approvals		
ATEX marking		 II 3D Ex tD A22 IP67 T80°C X Ta: -20...60°C
Note on ATEX marking		only in conjunction with the mounting plate
EMC		EN 60947-5-2
Mechanical data		
Weight	[g]	0.174
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	40 x 26 x 26
Materials		housing: PBT; cover: PC
Displays / operating elements		
Display	switching status	2 x LED, yellow
Accessories		
Items supplied		Mounting plate: 1 socket head screws: 2 x M5 x 35
Remarks		
Pack quantity		1 pcs.

IN508A




Inductive dual sensor for valve actuators

IND3004DBPKG/3D

Electrical connection

Cable: 2 m, PVC; 4 x 0.34 mm²

Connection

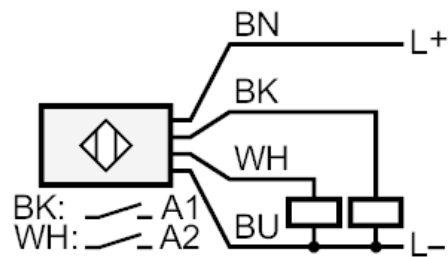

BN = brown
BU = blue
BK = black
WH = white