




Modul AS-Interface ClassicLine

ClassicL90 4AO (C) M12 IP67

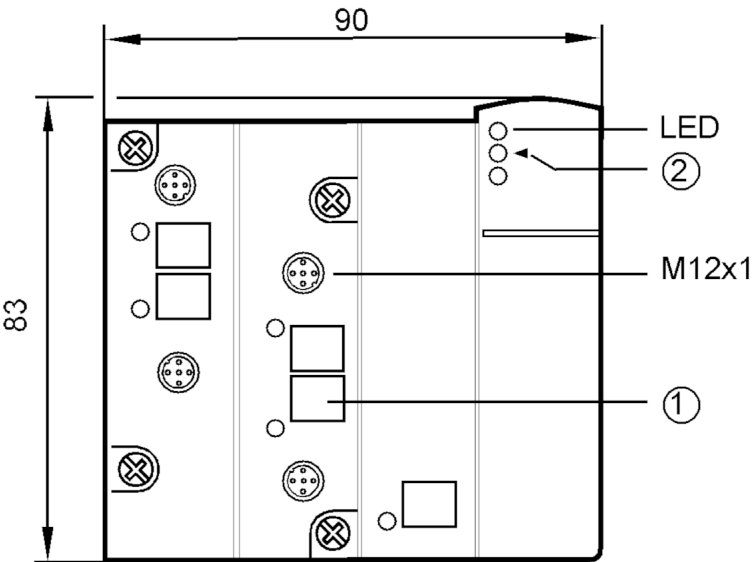

- 1 panel untuk pelabelan
2 pengaman adaptor inframerah



Aplikasi		
Aplikasi	Instalasi di lapangan	
Data kelistrikan		
Tegangan pengoperasian	[V]	26.5...31.6 DC
Konsumsi arus maks. dari AS-i	[mA]	24
Pelindung polaritas terbalik		ya
Suplai tegangan tambahan	[V]	24...30 DC; (AUX)
Konsumsi arus maksimal dari suplai tambahan	[mA]	550; (AUX)
Input/output		
Jumlah input dan output	Jumlah output analog: 4	
Input		
Input analog presisi	[%]	0,5
Output		
Jumlah output analog		4; (koneksi aktuator 3 kawat)
Output arus analog	[mA]	0...20
Beban maks.	[Ω]	600
Resolusi output analog		16 (1 bit = 1 μA)
Output suplai aktuator		AUX
Kondisi pengoperasian		
Suhu sekitar	[°C]	0...70



Modul AS-Interface ClassicLine

ClassicL90 4AO (C) M12 IP67

Suhu penyimpanan	[°C]	-20...85
Kelembapan udara relatif maks.	[%]	90; (non kondensasi)
Ketinggian maks. di atas permukaan laut	[m]	2000
Perlindungan		IP 67

Pengujian/persetujuan

EME	EN 50295	
	EN 61000-6-4	: 2001
	EN 61000-6-2	: 2001
MTTF	[ANN]	150

Klasifikasi AS-i

Pengalamatan AS-i	soket pengalaman; Pengalaman IR dimungkinkan					
AS-i master profile	M3; M4					
Profil AS-i	S-7.3.6					
Konfigurasi I/O AS-i	[hex]	7				
Kode ID AS-i	[hex]	3.6				
Penetapan bit parameter	bit parameter	Penamaan				
	P0	tidak digunakan				
	P1	tidak digunakan				
	P2	indikasi kesalahan perifer	: 1	diaktifkan	/ 0	dinonaktifkan
	P3	tidak digunakan				

Data teknis

Berat	[g]	206.5
Tipe pemasangan	Interface AS-i untuk bagian bawah FC-E	
Material	PBT	
Torsi pengencangan	[Nm]	0.6...0.8

Elemen display/pengoperasian

Display	sinyal analog	LED, kuning saluran AO1...AO4
	operasi	LED, hijau AS-i, AUX
	kesalahan	LED, merah

Koneksi listrik

Koneksi modul	Kabel pipih
---------------	-------------

Aksesori

Aksesori (opsional)	Bagian bawah modul
---------------------	--------------------

Keterangan

Jumlah paket	1 buah
--------------	--------




Modul AS-Interface ClassicLine

ClassicL90 4AO (C) M12 IP67

Koneksi listrik

Konektor: M12; pengkodean: A

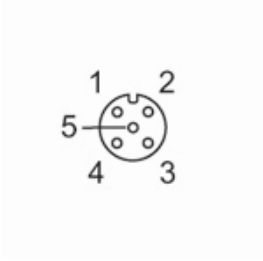

1	AO+ output analog
2	suplai aktuator +24 V
3	AO- output analog 0V
4	n.c.
5	ground fungsional