

Sensor induktif

IEA2001-FRKG/0,38M/PH



Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Jangkauan pendeteksian [mm]	1
Casing	tipe berulir
Dimensi [mm]	M8 x 1 / L = 50

Data kelistrikan

Tegangan pengoperasian [V]	5...36 DC
Kelas perlindungan	III

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya terbuka/biasanya tertutup; (dapat dipilih)
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.8
Peringkat arus permanen dari output peralihan DC [mA]	200
Frekuensi peralihan DC [Hz]	2000
Pelindung hubung singkat	ya
Pelindung beban berlebih	ya

Zona pendeteksian

Jangkauan pendeteksian [mm]	1
Jangkauan pendeteksian real Sr [mm]	$1 \pm 10 \%$
Jarak pengoperasian [mm]	0...0.81

Akurasi/deviasi

Faktor koreksi	baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis [X01]	1...15
Deviasi titik peralihan [X01]	-10...10

Kondisi pengoperasian

Suhu sekitar [°C]	-25...80
Perlindungan	IP 67

IE5432



Sensor induktif

IEA2001-FRKG/0,38M/PH

Pengujian/persetujuan		
EME	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF dipancarkan	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF dihantarkan	3 V
	EN 55011	kelas B
MTTF	[ANN]	3377

Data teknis		
Berat	[g]	23.7
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M8 x 1 / L = 50
Penamaan ulir		M8 x 1
Material		kuningan dilapisi perunggu putih; permukaan pendeteksian: PBT; mur pengunci: kuningan
Torsi pengencangan	[Nm]	A = 5 mm: 1 Nm; B: 2 Nm



Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning

Aksesori		
Item dikirim		mur pengunci: 2

Keterangan		
Jumlah paket		1 buah

Koneksi listrik		
Kabel: 0.38 m, PUR, Ø 3.5 mm; 2 x 0.14 mm ²		

Koneksi		
---------	--	--

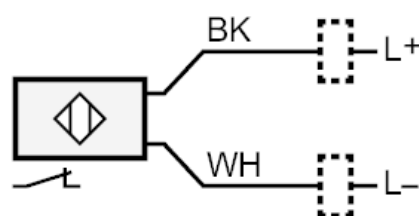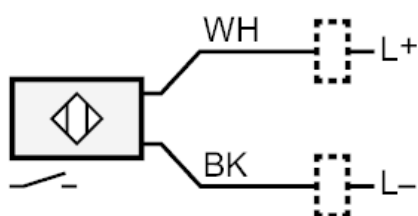

BK =
WH =

Warna core :
hitam
putih

IE5432



Sensor induktif

IEA2001-FRKG/0,38M/PH

Diagram dan grafik

Instalasi

