


Sensor induktif

IFB2002-BRKG/0,80M/US

Produk tidak tersedia - entri arsip

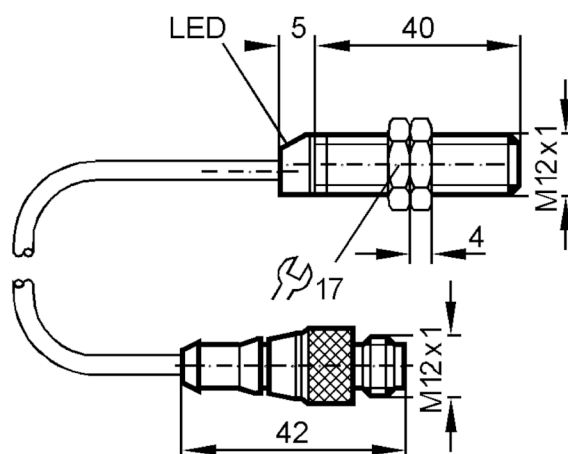

Karakteristik produk

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya tertutup
Jangkauan pendeteksian [mm]	2
Casing	tipe berulir
Dimensi [mm]	M12 x 1

Data kelistrikan

Tegangan pengoperasian [V]	10...36 DC
Pelindung polaritas terbalik	ya

Output

Desain kelistrikan	PNP/NPN
Fungsi output	biasanya tertutup
Penurunan tegangan maks. pada output peralihan DC [V]	4.6
Arus beban minimal [mA]	4
Kebocoran arus maks. [mA]	0.6
Peringkat arus permanen dari output peralihan DC [mA]	100
Frekuensi peralihan DC [Hz]	800
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya



Sensor induktif

IFB2002-BRKG/0,80M/US

Zona pendeteksian		
Jangkauan pendeteksian	[mm]	2
Jangkauan pendeteksian real Sr	[mm]	2 ± 10 %
Jarak pengoperasian	[mm]	0...1.6
Akurasi/deviasi		
Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...80
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
Data teknis		
Casing		tipe berulir
Pemasangan		flush mountable
Dimensi	[mm]	M12 x 1
Penamaan ulir		M12 x 1
Material		kuningan berlapis nikel; PBT
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim		mur pengunci: 2
Keterangan		
Jumlah paket		1 buah
Koneksi listrik - colokan		
Kabel: 0.8 m, PVC		
Konektor: 1 x M12; pengkodean: A		
		

IF9227



Sensor induktif

IFB2002-BRKG/0,80M/US

Koneksi

