




Inductive conductivity sensor

IND CONDUCTIVITY HYG G1/2 SC

Digital meets analogue: integrating modern IO-Link sensors the analogue way. The EIO104 allows you to realise two analogue signals from intelligent IO-Link sensors with several process values.

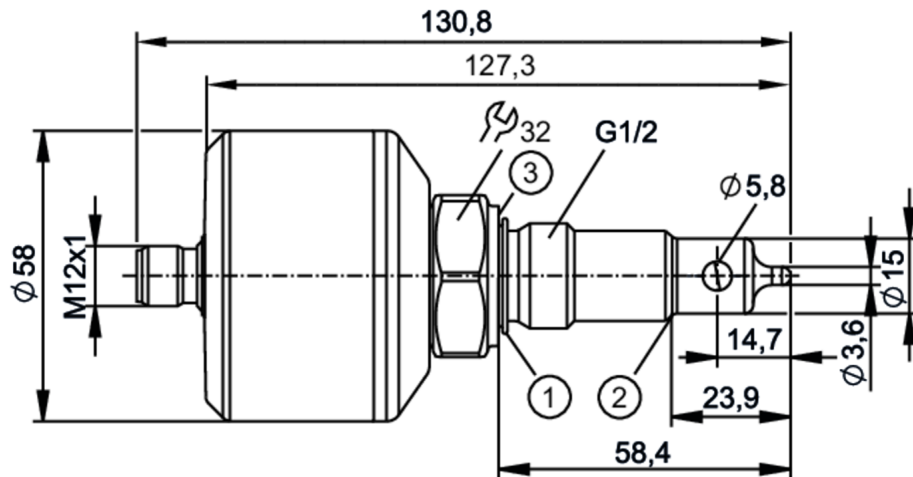

- 1 Gasket FKM (for sealing on the back - not pressure resistant) / removable
2 sealing edge Note: The unit must only be installed in a process connection for G1/2 sealing cone.
3 groove for sealing ring DIN 3869-21



EC 1935/2004 EHEDG Certified

FCM



O-Link



Product characteristics

Number of inputs and outputs	Number of analogue outputs: 1
Process connection	threaded connection G 1/2 external thread sealing cone

Application

Special feature	Gold-plated contacts
Media	conductive liquids
Note on media	water
	milk
	CIP liquids
Cannot be used for	See the operating instructions, chapter "Function and features".
Medium temperature [°C]	-25...100; (< 1 h: 150)
Pressure rating [bar]	16
Vacuum resistance [mbar]	-1000

Electrical data

Operating voltage	[V]	18...30 DC
Current consumption	[mA]	< 100
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	2
Measuring principle		inductive

Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 1
------------------------------	-------------------------------

Outputs

Total number of outputs	1
-------------------------	---



Inductive conductivity sensor

IND CONDUCTIVITY HYG G1/2 SC

Output signal	analogue signal; IO-Link
Output function	analogue output; scalable; selectable conductivity / temperature
Number of analogue outputs	1
Analogue current output [mA]	4...20
Max. load [Ω]	500

Measuring/setting range

conductivity measurement			
Measuring range	[μS/cm]	100...1000000	
Resolution	[μS/cm]	0...10.000	1
		10.000...100.000	10
		100.000...1.000.000	100

Temperature measurement	
Measuring range [$^{\circ}\text{C}$]	-25...150

Accuracy / deviations

conductivity measurement	
Accuracy (in the measuring range)	2 % MW \pm 25 $\mu\text{S/cm}$
Drift [%/K]	0,05 %/K MW
Repeatability	1 % MW \pm 25 $\mu\text{S/cm}$
Long-term stability	1 % MW \pm 25 $\mu\text{S/cm}$
Temperature measurement	
Accuracy [K]	20...50 $^{\circ}\text{C}$: $< \pm 0,2$ K; -25...150 $^{\circ}\text{C}$: $< \pm 1,5$ K
Repeatability [K]	0,2
Resolution [K]	0.1

Response times

conductivity measurement	
Response time [s]	< 2 ; (T09; Damping = 0)
Temperature measurement	
Response time [s]	< 40 ; (T09)

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Measuring Sensor, Identification and Diagnosis	
SIO mode	no	
Required master port type	A	
Process data analogue	1	
Min. process cycle time [ms]	5.6	
Supported DeviceIDs	Type of operation	DeviceID
	default	922

Operating conditions

Ambient temperature [$^{\circ}\text{C}$]	-40...60
--	----------

LDL220



Inductive conductivity sensor

IND CONDUCTIVITY HYG G1/2 SC

Storage temperature	[°C]	-40...85
Protection	IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)	

Tests / approvals

EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	131

Mechanical data

Weight	[g]	606.2
Materials	stainless steel (316L/1.4404); PEEK; PEI; FKM	
Materials (wetted parts)	PEEK	
Process connection	threaded connection G 1/2 external thread sealing cone	

Remarks

Remarks	Note: The unit must only be installed in a process connection for G1/2 sealing cone. MW = measured value	
Notes	Digital meets analogue: integrating modern IO-Link sensors the analogue way. The EIO104 allows you to realise two analogue signals from intelligent IO-Link sensors with several process values.	
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: gold-plated






Inductive conductivity sensor

IND CONDUCTIVITY HYG G1/2 SC

Connection

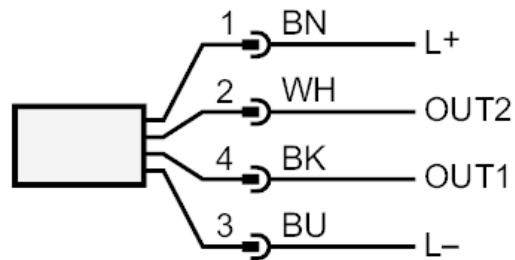

OUT1	IO-Link
OUT2	analogue output
	colours to DIN EN 60947-5-2
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white