




Inductive sensor

IEB3002-BPKG/V4A/10M

Article no longer available - archive entry

Alternative article: IE5295 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!

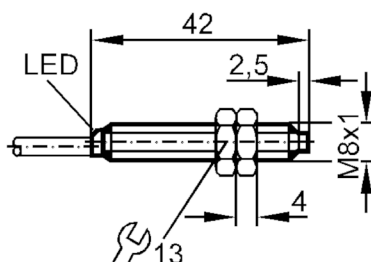

Product characteristics

Electrical design		PNP
Output function		normally open
Sensing range	[mm]	2
Housing		threaded type
Dimensions	[mm]	M8 x 1

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	10; (24 V)
Protection class		II
Reverse polarity protection		no

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	1
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	2000
Short-circuit protection		no
Overload protection		no

IE5280



Inductive sensor

IEB3002-BPKG/V4A/10M

Detection zone		
Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	0...1.62
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	3...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65
Mechanical data		
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M8 x 1
Thread designation		M8 x 1
Materials		stainless steel (1.4571/316Ti); POM
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		lock nuts: 2
Remarks		
Pack quantity		1 pcs.

IE5280



Inductive sensor

IEB3002-BPKG/V4A/10M

Electrical connection

Cable: 10 m, PUR; 3 x 0.14 mm²

Connection



Core colours :

BK = black
BN = brown
BU = blue

Article no longer available - archive entry

Alternative article: IE5295 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!