
OJ5008

Through-beam sensor transmitter

OJS-OOKG/FO/AS





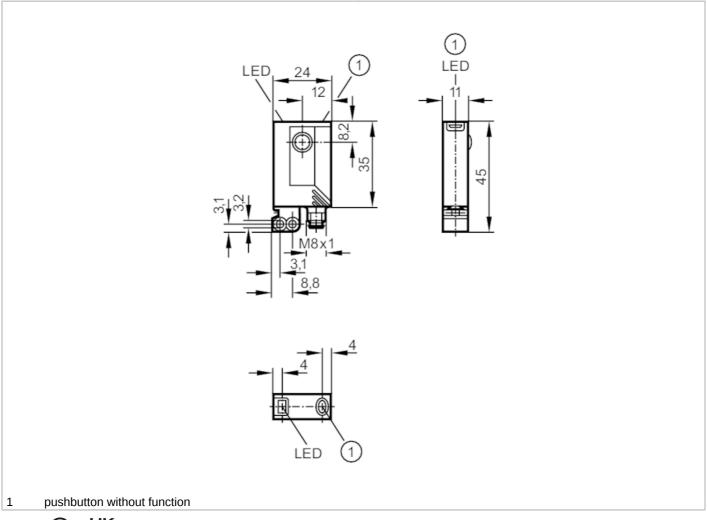

| Product characteristics | | |
|-----------------------------|------|---------------------|
| Type of light | | red light |
| Housing | | rectangular |
| Application | | |
| Function principle | | Through-beam sensor |
| Electrical data | | |
| Operating voltage | [V] | 1030 DC |
| Current consumption | [mA] | < 19 |
| Protection class | | III |
| Reverse polarity protection | | yes |
| Type of light | | red light |
| Wave length | [nm] | 660 |
| Outputs | | |
| Overload protection | | yes |
| Detection zone | | |
| Transmitter / receiver | | transmitter |

OJ5008

Through-beam sensor transmitter



OJS-OOKG/FO/AS

| Range | [m] | < 10 |
|--------------------------------|---------|---|
| Max. light spot diameter | [mm] | 1000 |
| Light spot dimensions refer to | | at maximum range |
| Operating conditions | | |
| Ambient temperature | [°C] | -2560 |
| Protection | | IP 67 |
| Tests / approvals | | |
| EMC | | EN 60947-5-2 |
| MTTF | [years] | 1773 |
| Mechanical data | | |
| Weight | [g] | 26.5 |
| Housing | | rectangular |
| Dimensions | [mm] | 35 x 24 x 11 |
| Materials | | housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS |
| Lens material | | glass |
| Lens alignment | | front lens |
| Displays / operating elen | nents | |
| Display | | operation 1 x LED, green |
| Accessories | | |
| Items supplied | | Basic clip: 1, E20964 |
| | | screws: 2 x M3 x 16 |
| | | spring washers: 2 |
| | | Nuts: 2 |
| Remarks | | |
| Remarks | | operating voltage "supply class 2" according to cULus |
| Pack quantity | | 1 pcs. |
| | | |

Electrical connection

Connector: 1 x M8; coding: A



OJ5008

Through-beam sensor transmitter





Connection

