


## Through-beam sensor receiver

OLE-FPKG/US-100

Article no longer available - archive entry

Alternative articles: O5E500 + E21122

When selecting an alternative article and accessories please note that technical data may differ!

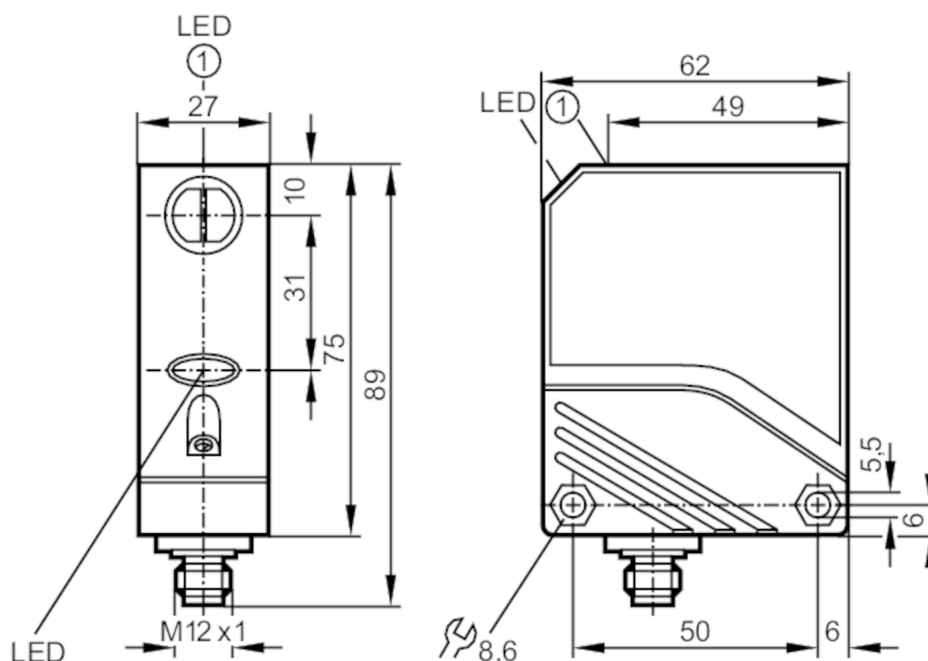

1 pushbutton

## Product characteristics

|               |                |
|---------------|----------------|
| Type of light | infrared light |
| Housing       | rectangular    |

## Application

|                    |                       |
|--------------------|-----------------------|
| Special feature    | Function check output |
| Function principle | Through-beam sensor   |

## Electrical data

|                             |      |                |
|-----------------------------|------|----------------|
| Operating voltage           | [V]  | 10...36 DC     |
| Current consumption         | [mA] | < 30           |
| Protection class            |      | II             |
| Reverse polarity protection |      | yes            |
| Overvoltage protection      |      | yes            |
| Type of light               |      | infrared light |
| Wave length                 | [nm] | 880            |

## Outputs

|                                           |                                          |
|-------------------------------------------|------------------------------------------|
| Electrical design                         | PNP                                      |
| Output function                           | light-on/dark-on mode; (parameterisable) |
| Max. voltage drop switching output DC [V] | 2.5                                      |
| Function check output                     | yes                                      |



## Through-beam sensor receiver

OLE-FPKG/US-100

|                                                      |                       |
|------------------------------------------------------|-----------------------|
| Max. voltage drop of function check output [V]       | 3.5                   |
| Max. current load for function check output [mA]     | 10                    |
| Permanent current rating of switching output DC [mA] | 100; (200 (...50 °C)) |
| Switching frequency DC [Hz]                          | 500                   |
| Short-circuit protection                             | yes                   |
| Type of short-circuit protection                     | pulsed                |

## Detection zone

|                        |          |
|------------------------|----------|
| Transmitter / receiver | receiver |
| Range [m]              | < 25     |

## Operating conditions

|                          |          |
|--------------------------|----------|
| Ambient temperature [°C] | -25...80 |
| Protection               | IP 67    |

## Tests / approvals

|     |              |         |
|-----|--------------|---------|
| EMC | EN 60947-5-2 |         |
|     | EN 55011     | class B |

## Mechanical data

|                 |              |
|-----------------|--------------|
| Housing         | rectangular  |
| Dimensions [mm] | 75 x 27 x 62 |
| Materials       | PA; PBT      |
| Lens material   | PMMA         |

## Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | switching status | 1 x LED, yellow |
|         | operation        | 1 x LED, green  |
|         | function         | 1 x LED, red    |

## Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

## Electrical connection


Connector: 1 x M12; coding: A



## Through-beam sensor receiver

OLE-FPKG/US-100

### Connection

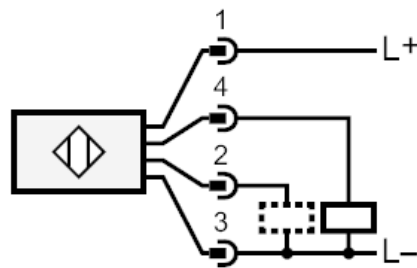

2 Function check output

### Diagrams and graphs

excess gain graph

