

# AC2801




## AS-Interface control cabinet module

CabinetModule 4DI 4DO R ST

Article no longer available - archive entry

Alternative articles: AC2258

When selecting an alternative article and accessories please note that technical data may differ!

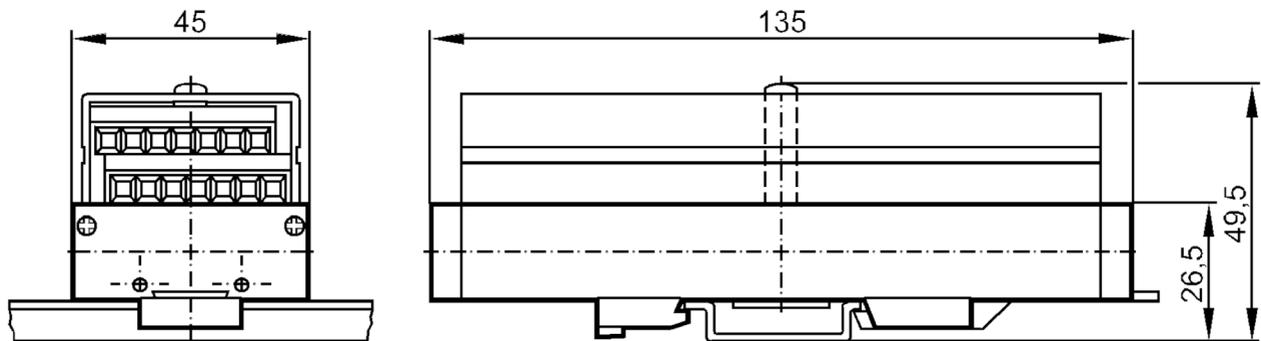

### Electrical data

Operating voltage [V]	26.5...31.6 DC
Current consumption [mA]	< 280
Max. current load total [A]	6

### Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of relay outputs: 4
------------------------------	---

### Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Power supply [V]	18...30
Max. total current rating of inputs [mA]	200
Input current High [mA]	> 3
Input current Low [mA]	< 1.5
Switching level high [V]	> 10
Digital inputs protected against short circuits	yes

### Outputs

Electrical design	AS-i
-------------------	------

# AC2801



## AS-Interface control cabinet module

CabinetModule 4DI 4DO R ST

Voltage range DC	[V]	24
Voltage range AC	[V]	240
Max. current load per output	[mA]	2500
Number of relay outputs		4
Electrically separated		yes

### Operating conditions

Ambient temperature	[°C]	-25...50
Protection		IP 20

### Tests / approvals

EMC	EN 50295	
	EN 50178	

### AS-i classification

AS-i profile		S-7.0
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	0
AS-i certificate		11601

### Mechanical data

Type of mounting	mounting on DIN rail and panel; string mounting possible	
Dimensions	[mm]	45 x 135 x 49.5
Materials		PA; PVC

### Displays / operating elements

Display	switching status	LED, yellow
	operation	LED, green

### Remarks

Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.




## AS-Interface control cabinet module

CabinetModule 4DI 4DO R ST

### Electrical connection

screw terminals:

#### Connection

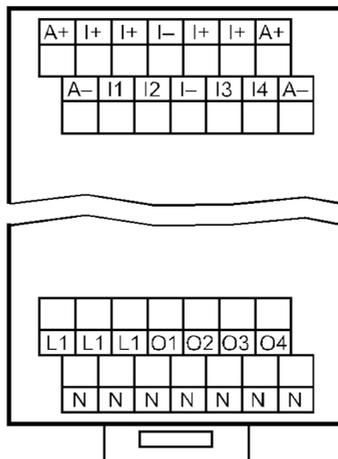

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
L1	external supply - (DC) / L1 (AC)
N	external supply - (DC) / N (AC)
I1...I4	switching input sensor 1...4
O1...O4	switching output actuator 1...4