

# OL5002




## Retro-reflective sensor

OLP-FNKG

Article no longer available - archive entry

Alternative articles: O5P502 + E11509 + E21122

When selecting an alternative article and accessories please note that technical data may differ!

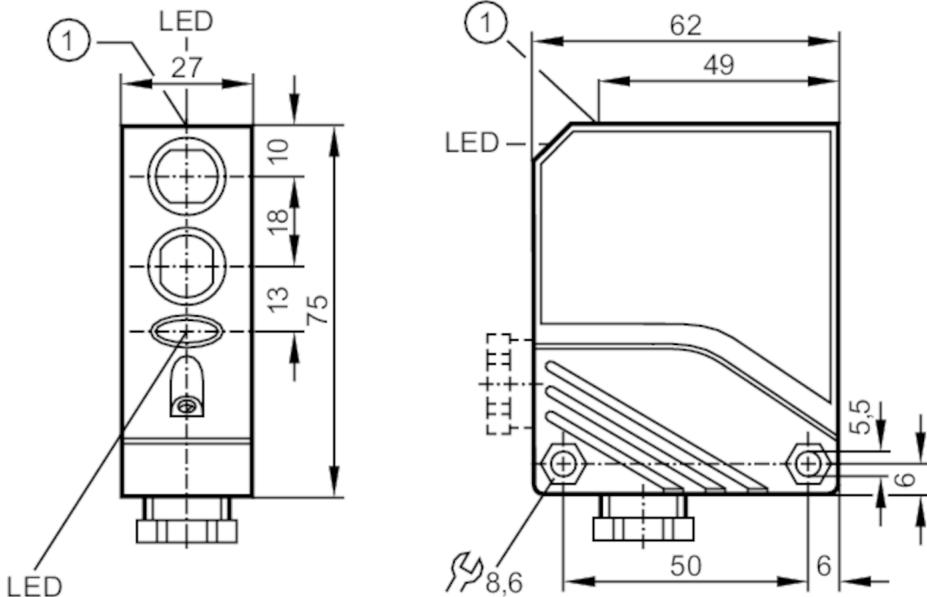

1 pushbutton

### Product characteristics

Type of light	red light
Housing	rectangular

### Application

Special feature	polarisation filter
Function principle	Retro-reflective sensor

### Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 37
Protection class	II
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	660

### Outputs

Electrical design	NPN
Output function	light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Max. voltage drop of function check output [V]	3.5
Max. current load for function check output [mA]	10

# OL5002



## Retro-reflective sensor

OLP-FNKG

Permanent current rating of switching output DC	[mA]	100; (200 (...50 °C))
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
<b>Detection zone</b>		
Range	[m]	0.3...5; (Prismatic reflector Ø 80 E20005)
Range referred to prismatic reflector	[m]	0.3...5; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	250
Light spot dimensions refer to		at maximum range
Polarisation filter available		yes
<b>Operating conditions</b>		
Ambient temperature	[°C]	-25...80
Protection		IP 67
<b>Tests / approvals</b>		
EMC	EN 60947-5-2	
	EN 55011	class B
<b>Mechanical data</b>		
Housing		rectangular
Dimensions	[mm]	75 x 27 x 62
Materials		PA; PBT
Lens material		PMMA
<b>Displays / operating elements</b>		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red
<b>Remarks</b>		
Pack quantity		1 pcs.


## Retro-reflective sensor

OLP-FNKG

### Electrical connection

terminals: ...1.5 mm<sup>2</sup>; Cable sheath: Ø 4.5...10 mm; Cable gland: M16 X 1.5

### Connection

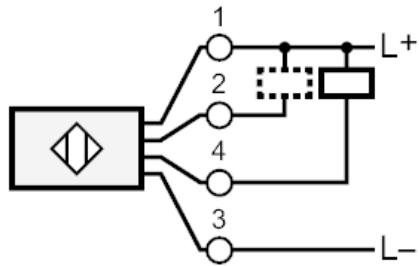

2

Function check output

### Diagrams and graphs

excess gain graph

