


AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

Article no longer available - archive entry

Alternative articles: AC5218 or AC2518

When selecting an alternative article and accessories please note that technical data may differ!

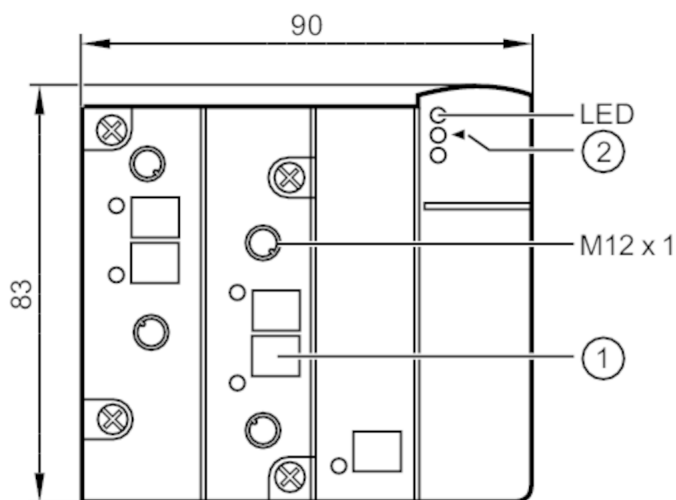

- 1 panel for labelling
2 fixture infrared adapter



Application

Application	field installation
-------------	--------------------

Electrical data

Operating voltage [V]	26.5...31.6 DC
Current consumption [mA]	130...180; (external supply)
Max. current consumption from AS-i [mA]	180; (with external supply: 50 mA)
Reverse polarity protection	yes
Additional voltage supply [V]	24 DC
Additional voltage supply	optional

Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 4
------------------------------	-------------------------------

Outputs

Voltage range DC [V]	24; (to PELV)
Number of analogue outputs	4; (Anschluss von 2-Draht-Aktuatoren)
Analogue current output [mA]	0...20
Max. load [Ω]	600
Short-circuit proof	yes
Resolution of analogue output	16 (1 bit = 1 µA)
Actuator supply outputs	AS-i / AUX

Operating conditions

Ambient temperature [°C]	0...70
--------------------------	--------



AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

Storage temperature	[°C]	-20...85
Protection		IP 67

Tests / approvals

EMC	EN 50295	
	EN 61000-6-4	: 2001
	EN 61000-6-2	: 2001

AS-i classification

AS-i addressing		addressing socket; IR addressing possible
AS-i profile		S-7.3.6
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	3.6

Mechanical data

Weight	[g]	226
Type of mounting		AS-i interface to FC/FC-E lower parts
Materials		PBT; Sealing: FKM; screws: stainless steel

Displays / operating elements

Display	operation	LED, green Voltage AS-i / 24 V AUX
	errors	LED, red
	function	LED, yellow channels AO1...AO4

Accessories


Accessories (optional)	Module lower part
------------------------	-------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: M12; coding: A



1	AO+ analogue output
2	n.c.
3	AO- analogue output 0V
4	n.c.
5	functional earth