


AC2631



I/O module for field applications

FieldModuleDP 2x2DI 2x2DO M12

phase-out article

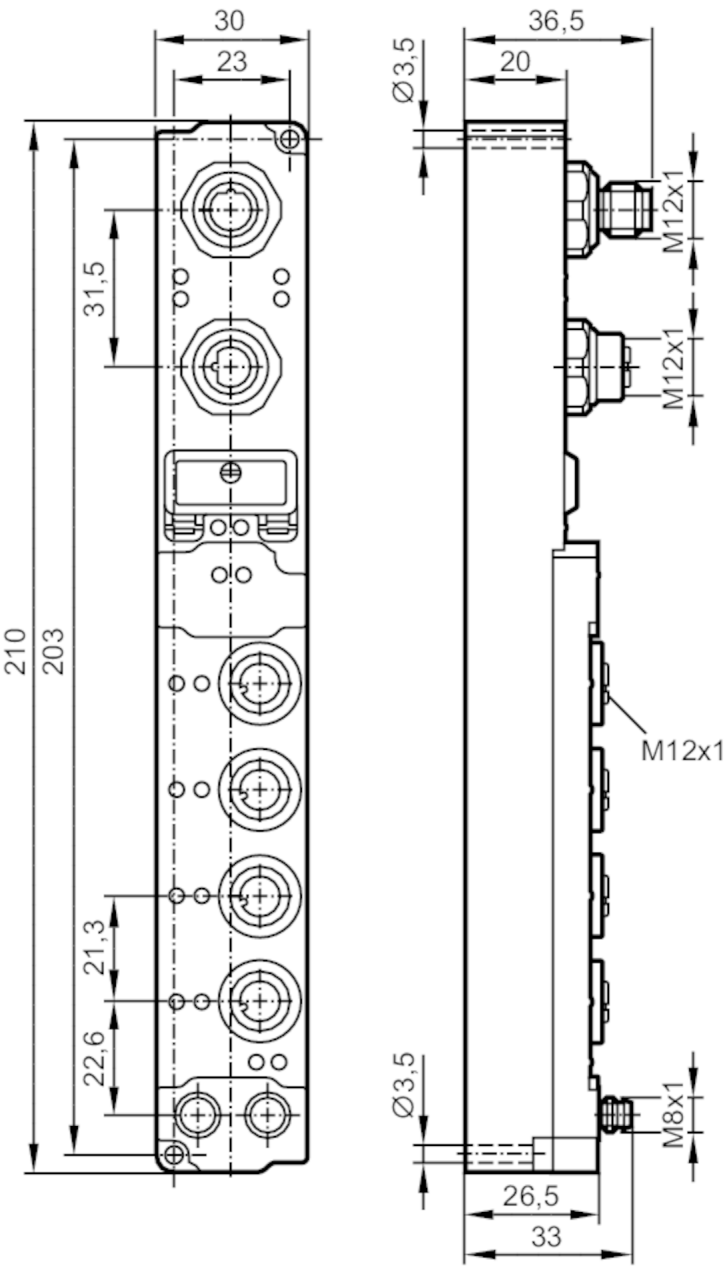

Electrical data

Operating voltage	[V]	20...29 DC
Current consumption	[mA]	< 90
Electrical separation		no

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
------------------------------	---

Inputs

Number of digital inputs	4
--------------------------	---



I/O module for field applications

FieldModuleDP 2x2DI 2x2DO M12

Подача напруги [V]	20...29
Max. total current rating of inputs [mA]	500
Switching level high [V]	11...30
Switching level low [V]	-3...5
Digital inputs protected against short circuits	yes

Outputs

Number of digital outputs	4
Voltage range DC [V]	20...29
Max. current load per output [mA]	2000

Interfaces

PROFIBUS

Transmission rate	9,6...12000 kBit/s
-------------------	--------------------

Operating conditions

Ambient temperature [°C]	0...55
Storage temperature [°C]	-25...85
Protection	IP 67

Tests / approvals

EMC	EN 50081-2	
	EN 50082-2	
Vibration resistance	IEC 68	parts 2-6 / IEC 68, parts 2-27

Mechanical data


Weight [g]	296.5
Materials	housing: PA 6; potting compound: PU; contact pins: brass gold-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - PROFIBUS IN

Connector: 1 x M12; coding: B



1	not used
2	wire A
3	GND
4	wire B
5	Screen



I/O module for field applications

FieldModuleDP 2x2DI 2x2DO M12

Electrical connection - PROFIBUS OUT


Connector: 1 x M12; coding: D



1	5 V DC
2	wire A
3	GND
4	wire B
5	Screen

Electrical connection - Process connection

Connector: 4 x M12; coding: A



1	24 V DC
2	In-/Output B
3	GND
4	In-/Output A
5	not used

Electrical connection - подача напруги IN

Connector: 1 x M8; coding: A



1	24 V DC UB
2	24 V DC UL
3	GND
4	GND

AC2631



I/O module for field applications

FieldModuleDP 2x2DI 2x2DO M12

Electrical connection - подача напруги OUT

Connector: 1 x M8; coding: A



1	24 V DC UB
2	24 V DC UL
3	GND
4	GND