


AC2731



AS-Interface PCB module

PCB 3DI 3DO T IP00

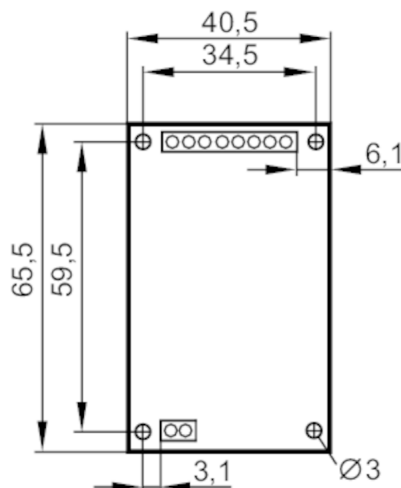

Application

Application

housing for panel mounting

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	< 200
Max. current load total	[A]	0.18; (total current for all inputs and outputs supplied from AS-i: 180 mA)
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 3; Number of digital outputs: 3
------------------------------	---

Inputs

Number of digital inputs	3
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Подача напруги [V]	20...30; (DC)
Digital inputs protected against short circuits	yes

Outputs

Electrical design	PNP
Number of digital outputs	3
Voltage range DC [V]	18...30; (DC)
Max. current load per output [mA]	180; (note current load for all inputs and outputs)
Short-circuit proof	yes
Actuator supply outputs	AS-i

Operating conditions

Ambient temperature	[°C]	-25...70
---------------------	------	----------

Tests / approvals

EMC	EN 50295
-----	----------



AS-Interface PCB module

PCB 3DI 3DO T IP00

AS-i classification					
AS-i version	2.1				
Розширений режим адресації	yes				
AS-i master profile	M2; M3; M4				
AS-i profile	S-7.A.E				
AS-i I/O configuration [hex]	7				
AS-i ID code [hex]	A.E				
Assignment of the data bits	data bit	D0	D1	D2	D3
	input	I-1	I-2	I-3	-
	Output	O-1	O-2	O-3	-
Mechanical data					
Weight [g]	30.5				
Displays / operating elements					
Display	operation			LED, green	
	failure			LED, red	
Remarks					
Remarks	The AS-i module is a PCB solution for an AS-i slave, supply via AS-i.				
	A watchdog function switches the outputs off if there is no communication on the AS-i line.				
Pack quantity	1 pcs.				
Electrical connection					
screw terminals: 0.2...1.5 mm²; AWG26 - AWG16					
O1	Output 1				
O2	Output 2				
O3	Output 3				
I-	Sensor supply 0 V				
I+	Sensor supply +24 V				
I1	input 1				
I2	input 2				
I3	input 3				
A-	AS-i -				
A+	AS-i +				