


Inductive sensor

IEK2002-FRKG/US-104

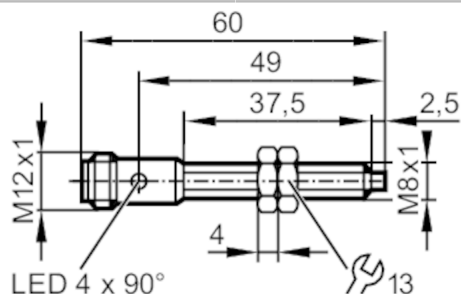

Product characteristics

Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	2
Housing		threaded type
Dimensions	[mm]	M8 x 1 / L = 60

Application

Special feature	Increased sensing range
-----------------	-------------------------

Electrical data

Operating voltage	[V]	5...30 DC
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		no

Outputs

Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	4.6
Minimum load current	[mA]	4
Max. leakage current	[mA]	0.8
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	2
Real sensing range S_r	[mm]	$2 \pm 10 \%$
Operating distance	[mm]	0...1.62
Increased sensing range		yes

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[X01]	1...20
Switch point drift	[X01]	-10...10



Inductive sensor

IEK2002-FRKG/US-104

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[ANN]	1703
Mechanical data		
Weight	[g]	23.7
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M8 x 1 / L = 60
Thread designation		M8 x 1
Materials		brass white bronze coated; sensing face: LCP orange; LED window: PEI; lock nuts: brass white bronze coated
Tightening torque	[Nm]	A = 5 mm: 1,5 Nm; B: 2 Nm
Full-metal housing		no
Displays / operating elements		
Display	switching status	1 x LED, yellow
Аксессуары		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M12; coding: A		
		

Inductive sensor

IEK2002-FRKG/US-104

Connection



Diagrams and graphs

Installation

