


Diffuse reflection sensor

OGT-HBOA



1 pushbutton

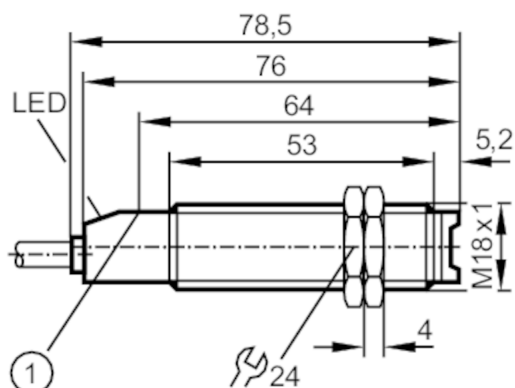

Product characteristics

Type of light	infrared light
Housing	threaded type

Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

Electrical data

Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...250 AC/DC
Protection class		II
Reverse polarity protection		no
Type of light		infrared light
Wave length	[nm]	880

Outputs

Output function		light-on mode
Max. voltage drop switching output DC	[V]	8
Max. voltage drop switching output AC	[V]	8
Minimum load current	[mA]	5
Max. leakage current	[mA]	1.7
Permanent current rating of switching output AC	[mA]	90; (180 (...40 °C))
Permanent current rating of switching output DC	[mA]	90; (180 (...40 °C))
Short-time current rating of switching output	[mA]	600; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	25
Short-circuit proof		no
Overload protection		no



Diffuse reflection sensor

OGT-HBOA

Detection zone		
Range	[mm]	1...600; (white paper 200 x 200 mm 90% remission)
Max. light spot diameter	[mm]	169
Light spot dimensions refer to		at maximum range
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[ANN]	338
Mechanical data		
Weight	[g]	121.3
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 78.5
Thread designation		M18 x 1
Materials		PBT
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, red
	function	1 x LED, red flashing
Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting
Аксессуары		
Items supplied		lock nuts: 2
Remarks		
Remarks		Recommendation: Check the safe functioning of the unit after a short circuit.
Pack quantity		1 pcs.



Diffuse reflection sensor

OGT-HBOA

Electrical connection

Cable: 2 m, PVC; 2 x 0.5 mm²

Connection

Note : miniature fuse to IEC60127-2 sheet 1 $\leq$ 2 A fast acting

Core colours :

BN = brown
BU = blue

Diagrams and graphs

excess gain graph

