

RU1066




Incremental encoder with solid shaft

RU-2500-I05/S2

Article no longer available - archive entry

Alternative articles: RUP500

When selecting an alternative article and accessories please note that technical data may differ!

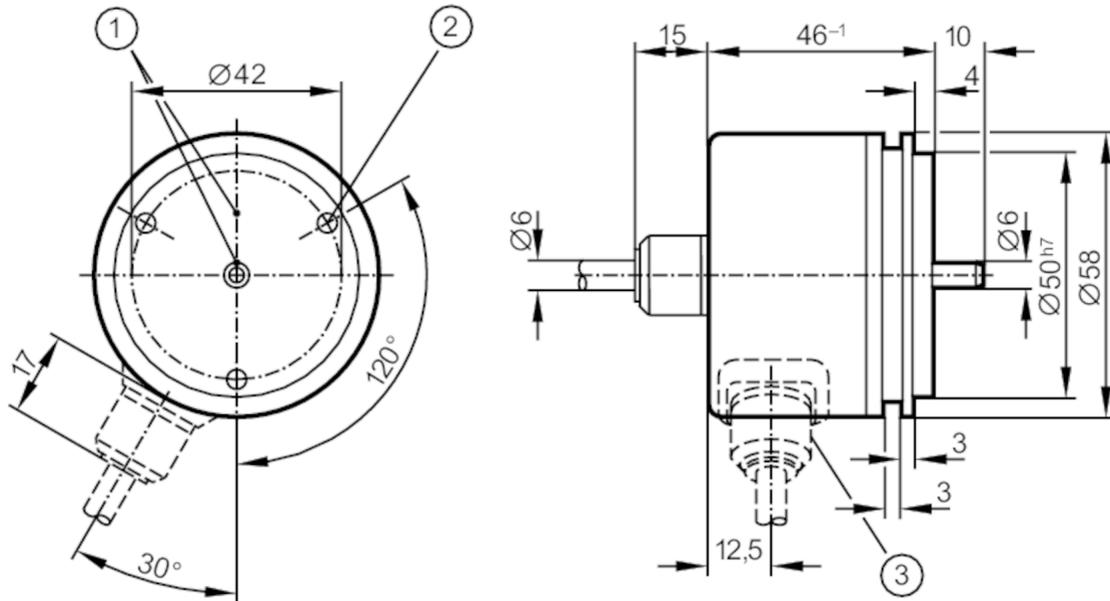

- 1 reference mark
- 2 M4 Depth 5 mm



Product characteristics

Resolution	2500 resolution
Shaft design	solid shaft
Shaft diameter [mm]	6

Application

Function principle	incremental
--------------------	-------------

Electrical data

Operating voltage tolerance [%]	10
Operating voltage [V]	5 DC
Current consumption [mA]	150

Outputs

Electrical design	TTL
Max. current load per output [mA]	20
Switching frequency [kHz]	300
Phase difference A and B [°]	90

Measuring/setting range

Resolution	2500 resolution
------------	-----------------

Operating conditions

Ambient temperature [°C]	-30...100
--------------------------	-----------

RU1066



Incremental encoder with solid shaft

RU-2500-I05/S2

Note on ambient temperature		for firmly laid cable: -30 °C
Storage temperature [°C]		-30...100
Max. relative air humidity [%]		98
Protection		IP 64

Tests / approvals

Shock resistance		100 g (6 ms)
Vibration resistance		10 g (55...2000 Hz)


Mechanical data

Weight [g]		545.6
Dimensions [mm]		Ø 58 / L = 46
Materials		aluminium
Max. revolution, mechanical [U/min]		12000
Max. starting torque [Nm]		1
Reference temperature [°C]		20
Shaft design		solid shaft
Shaft diameter [mm]		6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end) [N]		10
Max. shaft load radial (at the shaft end) [N]		20
Fixing flange		synchro-flange

Electrical connection

Cable: 2 m, PUR; axial

Connector: 1 x Bajonett (ifm 1000.2)



pin 1	A
pin 2	A inverted
pin 3	B
pin 4	B inverted
pin 5	L+ sensor
pin 6	0 index
pin 7	0 index inverted
pin 9	L+ (Up)
pin 10	0V sensor
pin 11	housing
pin 12	0V (Un)

RU1066




Incremental encoder with solid shaft

RU-2500-I05/S2

Diagrams and graphs

Pulse diagram



direction of rotation clockwise (looking at the shaft)