




AS-Interface control cabinet module

CabinetModule 4DI 4DO R C

Article no longer available - archive entry

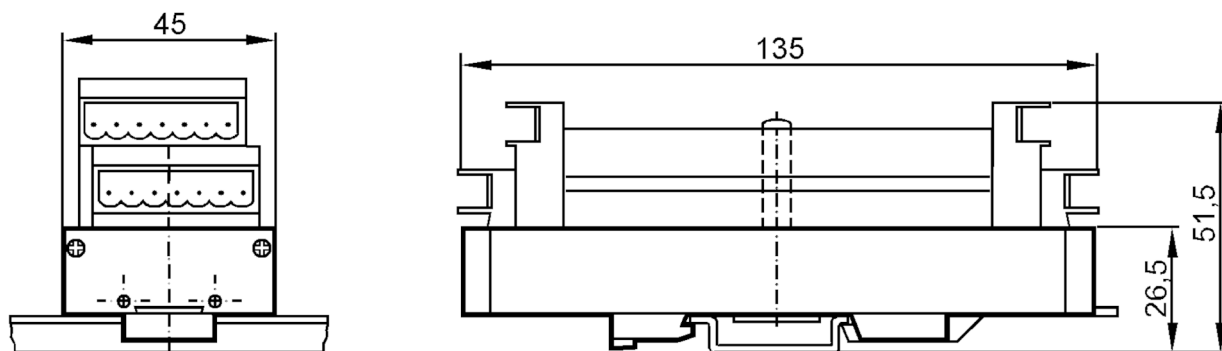

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	< 280
Max. current load total	[A]	6

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of relay outputs: 4
------------------------------	---

Inputs

Number of digital inputs		4
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AS-i
Voltage supply	[V]	18...30
Max. total current rating of inputs	[mA]	200
Input current High	[mA]	> 3
Input current low	[mA]	< 1.5
Switching level high	[V]	> 10
Digital inputs protected against short circuits		yes

Outputs

Electrical design		AS-i
Voltage range DC	[V]	24
Voltage range AC	[V]	240
Max. current load per output	[mA]	2500



AS-Interface control cabinet module

CabinetModule 4DI 4DO R C

Number of relay outputs	4	
Electrically separated	yes	
Operating conditions		
Ambient temperature	[°C]	-25...50
Protection	IP 20	
Tests / approvals		
EMC	EN 50295	
	EN 50178	
AS-i classification		
AS-i profile	S-7.0	
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	0
AS-i certificate	11601	
Mechanical data		
Type of mounting	Mounting on DIN rail and panel; String mounting possible	
Material	PA; PVC	
Displays / operating elements		
Display	Switching status	LED, yellow
	Power	LED, green
Remarks		
Remarks	Do not connect any of the following points to an external potential:	
	I-, I+, I1, I2, I3, I4	
	The connections are electrically connected with the AS-i cable.	
Pack quantity	1 pcs.	




AS-Interface control cabinet module

CabinetModule 4DI 4DO R C

Electrical connection

COMBICON:

Connection

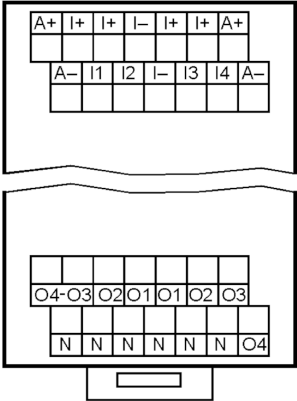

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
O4-O3/O2/O1	External supply + (DC) / L1 (AC)
N	External supply - (DC) / N (AC)
I1...I4	Switching input sensor 1...4
O1...O4	Switching output actuator 1...4