



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67



Application		
Application	field installation	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current consumption from AS-i	[mA]	50
Max. current load total	[A]	4
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 4	
Outputs		
Number of digital outputs		4
Circuit		PNP
Voltage range DC	[V]	15...30; (to PELV; via flat cable)
Max. current load per output	[mA]	2000; (utilization category DC-13 (control of electromagnets): 40 W (IEC 60947-5-1))
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

Tests / approvals						
EMC		EN 50295				
		IEC 61000-6-2				
MTTF [years]		201				
AS-i classification						
AS-i version		2.11; 3.0				
AS-i addressing		Addressing socket				
Extended addressing mode		no				
AS-i master profile		M2; M3; M4				
AS-i profile		S-8.0.E				
AS-i I/O configuration [hex]		8				
AS-i ID code [hex]		0.E				
Data bits		Data bit	D0	D1	D2	D3
		Output	1	2	3	4
		Socket	O-1/2	O1/2 O-2	O-3/4	O-3/4 O-4
		Pin	4	2 4	4	2 4
Mechanical data						
Weight [g]		183.5				
Type of mounting		AS-i flat cable connection				
Material		PA; Piercing contacts: CuSn6 nickel-plated and tin-plated				
Displays / operating elements						
Display		Power		LED, green		
		errors		LED, red		
		Function		LED, yellow		
Electrical connection						
Module connection		Flat cable				
Accessories						
Items supplied		lower part				
Accessories (optional)		Protective cap: M12, E73004				
Remarks						
Pack quantity		1 pcs.				




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

Electrical connection

quick mounting technology for AS-i flat cable: ; three selectable directions

Connection

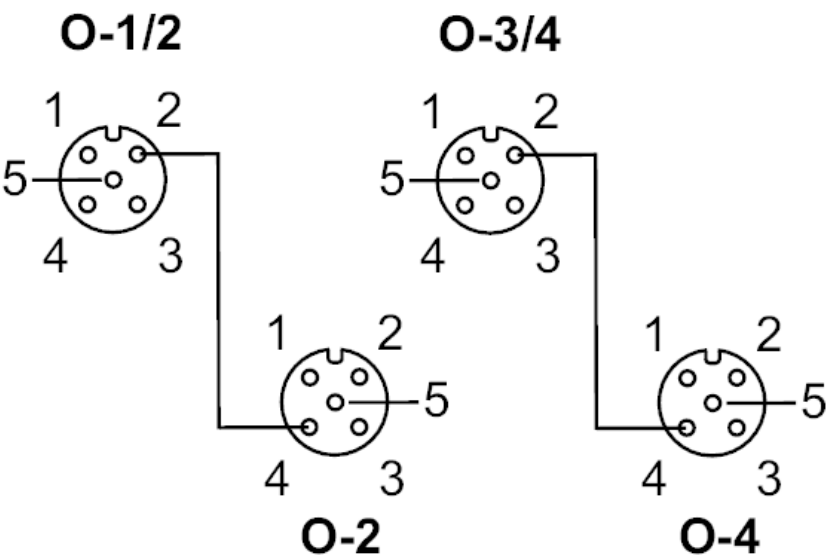

Connector: M12

Outputs	
Socket O-1/2	
1	not used
2	Switching output 2
3	External voltage AUX -
4	Switching output 1
5	not used
Socket O-2	
1	not used
2	not used
3	External voltage AUX -
4	Switching output 2
5	not used
Socket O-3/4	
1	not used
2	Switching output 4
3	External voltage AUX -
4	Switching output 3
5	not used
Socket O-4	
1	not used
2	not used
3	External voltage AUX -
4	Switching output 4
5	not used