


DD2503



Evaluation unit for speed monitoring

MONITOR/FR-1 /110-240VAC/DC

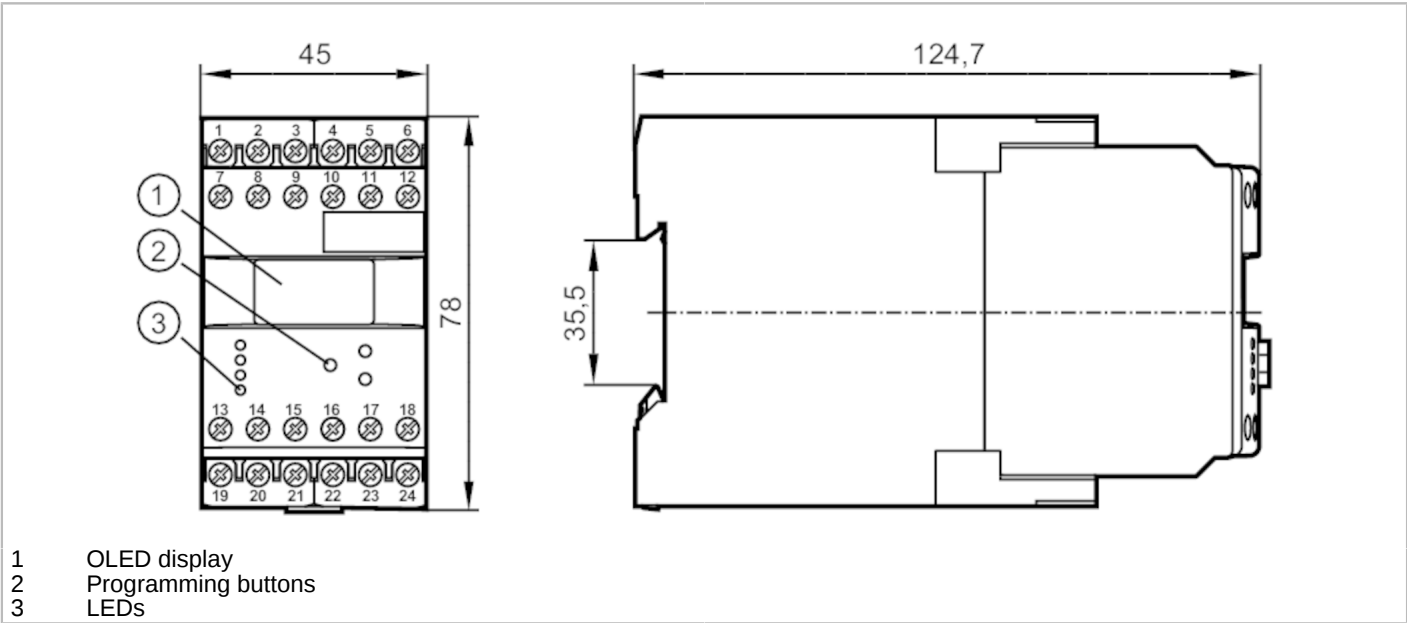

- 1 OLED display
- 2 Programming buttons
- 3 LEDs



Product characteristics		
Housing		housing for DIN rail mounting
Dimensions	[mm]	78 x 45 x 124.7
Application		
Application		pulse evaluation system with microprocessor for frequency; rotational speed; speed; pulses and machine cycles
Electrical data		
Nominal voltage AC	[V]	110...240
Nominal voltage DC	[V]	27
Nominal voltage tolerance	[%]	< 10
Nominal voltage tolerance 2	[%]	20...10
Nominal frequency AC	[Hz]	50...60
Power consumption	[W]	3
Auxiliary energy for sensors DC	[V]	19.6...27.7; (SELV, ≤ 15 mA)
Inputs / outputs		
Number of inputs and outputs		Number of analog outputs: 1; Number of relay outputs: 2
Outputs		
Number of relay outputs		2
Contact rating		6 A (250 V AC); B300, R300
Number of analog outputs		1
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Measuring/setting range		
Setting range Hz	[Hz]	0.1...1000
Setting range	[Imp/min]	1...60000



Evaluation unit for speed monitoring

MONITOR/FR-1 /110-240VAC/DC

Operating conditions		
Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	80; (40 °C: 50 %)
Protection		IP 50
Protection rating terminals		IP 20
Tests / approvals		
EMC	EN 61010	2011
	EMV 89/336/EWG	
	EN 61000-6-2	2005
	EN 61000-6-4	2007
MTTF	[years]	152
Mechanical data		
Weight	[g]	381.5
Housing		housing for DIN rail mounting
Dimensions	[mm]	78 x 45 x 124.7
Material		plastics
Displays / operating elements		
Display		OLED display, 128 x 64 pixels luminous
	Switching status	LED, green
Remarks		
Remarks		overvoltage category II; pollution degree 2
Electrical connection		
dual-chamber terminals: 2 x ...2.5 mm ² ; AWG 14		
1	DC Supply voltage (L-)	
2	DC Supply voltage (L+)	
3	Supply transistor outputs (L+)	
4	sensor signal pnp	
5	DC Sensor supply (L+)	
6	DC Sensor supply (L-)	
7	AC Supply voltage (L)	
8	AC Supply voltage (N)	
9	not used	
10	sensor signal npn	
11	not used	
12	not used	
13	Relay 1 common	
14	Relay 1 normally open	
15	Relay 1 normally closed	
16	transistor output 1 pnp	
17	Reset 1 pnp	
18	Reset 2 pnp	
19	Relay 2 common	
20	Relay 2 normally open	
21	Relay 2 normally closed	
22	analog output (+)	
23	analog output (-)	
24	transistor output 2 pnp	