
# O6S305

### Through-beam sensor transmitter



O6S-OOKG/AS/4P



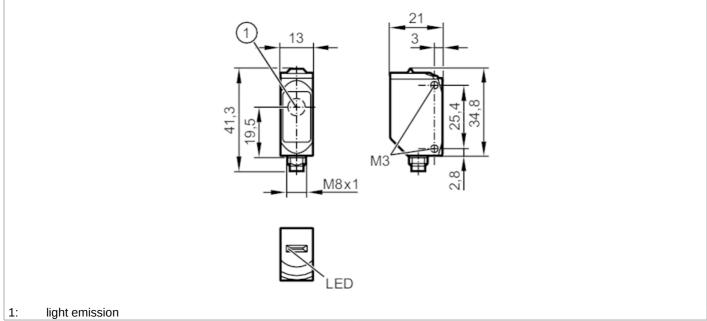

Product characteristics				
Type of light		red light		
Housing		rectangular		
Application				
Function principle		Through-beam sensor		
Electrical data				
Operating voltage	[V]	1030 DC		
Current consumption	[mA]	11; ((24 V))		
Protection class		III		
ype of light		red light		
Wave length	[nm]	633		
Detection zone				
Transmitter / receiver		transmitter		
Range	[m]	< 10		
Max. light spot diameter	[mm]	300		
Light spot dimensions refer to		at maximum range		
Interfaces				
Communication interface		IO-Link		
Transmission type		COM2 (38,4 kBaud)		
IO-Link revision		1.1		
SDCI standard		IEC 61131-9		
Profiles		Smart Sensor: Device Identification		
SIO mode		yes		
Required master port type		A		
Min. process cycle time	[ms]	2.5		

# O6S305

### Through-beam sensor transmitter



O6S-OOKG/AS/4P

IO-Link process data (cyclical)		function		bit length			
		process value		8			
IO-Link functions (acyclical)		application specific tag; operating hours counter; switching cycles counter					
Supported DeviceIDs		Type of operation		DeviceID			
		default		420			
Operating conditions							
Ambient temperature	[°C]	-2580					
Protection		IP 65; IP 67; IP 68; IP 69K					
Tests / approvals							
EMC		EN 60947-5-2					
MTTF	[years]	1239					
UL approval		UL Approval no.		E011			
Mechanical data							
Weight	[g]		33	3.8			
Housing		rectangular					
Dimensions	[mm]	34.8 x 13 x 21					
Materials		housing: stainless steel (1.4404 / 316L); plastics: PPSU; Sealing: EPDM					
Lens material		PMMA					
Lens alignment		side lens					
Tightening torque	[Nm]	1; (screws)					
Displays / operating elements							
Display		operation		1 x LED, green			
Remarks							
Remarks		operating voltage "supply class 2" according to cULus					
Pack quantity		1 pcs.					
Electrical connection							
Connector: 1 x M8; coding: A							
_							




### O6S305

#### Through-beam sensor transmitter

O6S-OOKG/AS/4P

#### Connection







IO-Link

#### Diagrams and graphs

excess gain graph

