


Article no longer available - archive entry

Alternative articles: AC2055

When selecting an alternative article and accessories please note that technical data may differ!

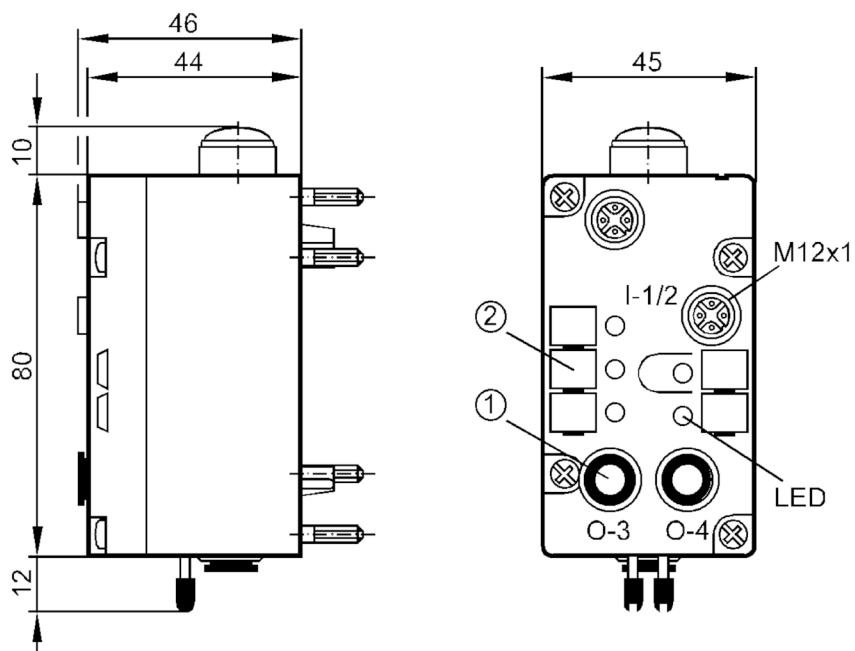

- 1 tube connection Ø 8 mm
2 panel for labelling

**Electrical data**

Operating voltage [V]	26.5...31.6 DC
Current consumption [mA]	< 150
Integrated watchdog	yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 2; Number of pneumatic outputs: 2
------------------------------	---

Inputs

Number of digital inputs	2
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Подача напруги [V]	20...30
Max. total current rating of inputs [mA]	100
Input current High [mA]	> 3
Input current Low [mA]	< 1.5
Switching level high [V]	> 10
Digital inputs protected against short circuits	yes

AirBox 2DI 2PO M12

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — UK-UA — AC2037-00 — 15.08.2003 — 




AS-Interface AirBox

AirBox 2DI 2PO M12

Electrical connection

contact pins to module lower part, FK / PG:

Connector: M12; coding: A

A diagram of an M12 connector pinout. It shows a circular arrangement of five pins. Pin 1 is at the top, pin 2 is at the top-right, pin 3 is at the bottom-right, pin 4 is at the bottom, and pin 5 is at the top-left. A horizontal line connects pins 2 and 4, indicating they are internally bridged.

	Inputs
1	Sensor supply L+
2+4	data input internally bridged
3	Sensor supply L-