

Inductive sensor

IGK3005-FRKG/V4A/IO/US-104



Product characteristics

Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Communication interface	IO-Link
Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 60

Application

Special feature	Magnetic-field immune
Magnetic-field immune	yes
Max. magnetic field immunity [mT]	300

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 20
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	75
Short-circuit protection	yes
Overload protection	yes

Detection zone

Switch point IO-Link [mm]	1...4.85
Measuring range IO-Link [mm]	0.5...5

Accuracy / deviations

Repeatability	< 20 µm
---------------	---------

Factory calibration (target: aluminium, 36x36 mm)

Resolution [µm]	10
-----------------	----

IGP200



Inductive sensor

IGK3005-FRKG/V4A/IO/US-104

Temperature drift	± 2 µm/K	
Linearity deviation	± 20 µm	
application calibration (1-point calibration; target: steel, 36x36 mm)		
Resolution [µm]	10	
Temperature drift	± 3 µm/K	
Linearity deviation	± 100 µm	
Application calibration (3-point calibration; target: steel, 18x18 mm)		
Resolution [µm]	10	
Temperature drift	± 3 µm/K	
Linearity deviation	± 50 µm	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor: Device Identification; Device Diagnosis; Device Teach Channel; Binary Data Channel; Process Data Variable	
SIO mode	yes	
Required master port type	A	
Min. process cycle time [ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID
	default	1706
Operating conditions		
Ambient temperature [°C]	-25...70	
Protection	IP 65; IP 66; IP 67; IP 68; IP 69K	
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles, 1 octave per minute, in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27 Eb	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
Fast temperature change	EN 60068-2-14 Na	TA = -25 °C; TB = 70 °C; t1 = 30 min; t2 = < 10 s; 50 cycles
MTTF [years]	1341	
Embedded software included	yes	
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	power supply	Limited Voltage/Current
	UL Approval no.	A005
	File number UL	E174191

IGP200



Inductive sensor

IGK3005-FRKG/V4A/IO/US-104

Mechanical data		
Weight	[g]	73.5
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M18 x 1 / L = 60
Thread designation		M18 x 1
Materials		housing: stainless steel (316L/1.4404); sensing face: LCP white; LED window: PEI; lock nuts: stainless steel (316L/1.4404)
Tightening torque	[Nm]	7

Displays / operating elements		
Display	switching status	4 x LED, yellow
	SIO mode	
	output stage supplied with current	LED, yellow lights
	IO-Link mode	
	target in measuring range	LED, yellow lights

Accessories	
Items supplied	lock nuts: 2



Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A



Connection

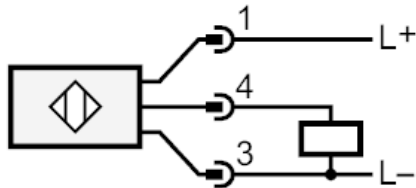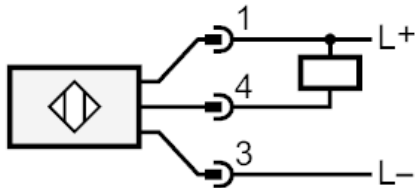

4: OUT / IO-Link




Inductive sensor

IGK3005-FRKG/V4A/IO/US-104

Diagrams and graphs

Linearity deviation

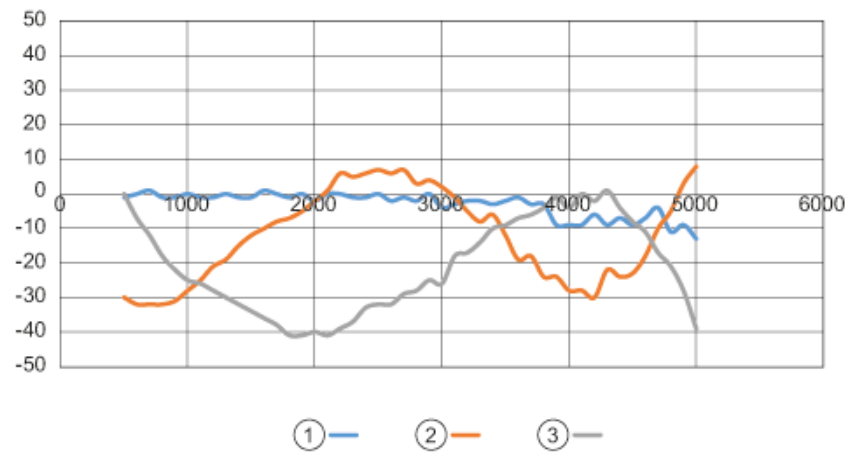

x measured value [μm]

y Linearity deviation [μm]

1 Factory calibration (target: aluminium, 36x36 mm)

2 application calibration (1-point calibration; target: steel, 36x36 mm)

3 Application calibration (3-point calibration; target: steel, 18x18 mm)