
## RC6045

#### Incremental encoder with solid shaft



RC-0050-124/L6

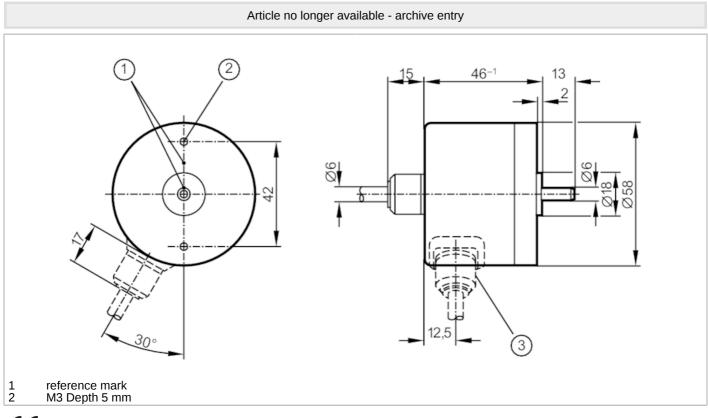

# CE

Product characteristics		
Resolution		50 resolution
Shaft design		solid shaft
Shaft diameter	[mm]	6
Electrical data		
Operating voltage	[V]	1030 DC
Current consumption	[mA]	150
Outputs		
Electrical design		HTL
Max. current load per output	[mA]	50
Switching frequency	[kHz]	300
Type of short-circuit protection		< 60 s
Phase difference A and B	[°]	90
Measuring/setting range		
Resolution		50 resolution
Operating conditions		
Ambient temperature	[°C]	-2085
Storage temperature	[°C]	-30100
Max. relative air humidity	[%]	98
Protection		IP 64

## RC6045

### Incremental encoder with solid shaft

RC-0050-124/L6

Tests / approvals		
Shock resistance		100 g (6 ms)
Vibration resistance		10 g (552000 Hz)
Mechanical data		
Dimensions [r	mm]	Ø 58 / L = 46
Materials		aluminium
Max. revolution, mechanical [U/min]		12000
Max. starting torque [I	Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter [r	mm]	6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Electrical connection		
Cable: 6 m, PUR; axial		
brown A green A inverted grey B pink B inverted red 0 index black 0 index inverted blue L+ sensor white 0V sensor brown/green L+ (Up) white/green 0V (Un) lilac failure inverted screen housing		
Diagrams and graphs		
Pulse diagram		-100,100,100,100,100,100,100,100,100,100