




Flush pressure sensor with display

PI-001-REB34-KFPKG/US/ /P

Article no longer available - archive entry

Alternative articles: PI2957
When selecting an alternative article and accessories please note that technical data may differ!

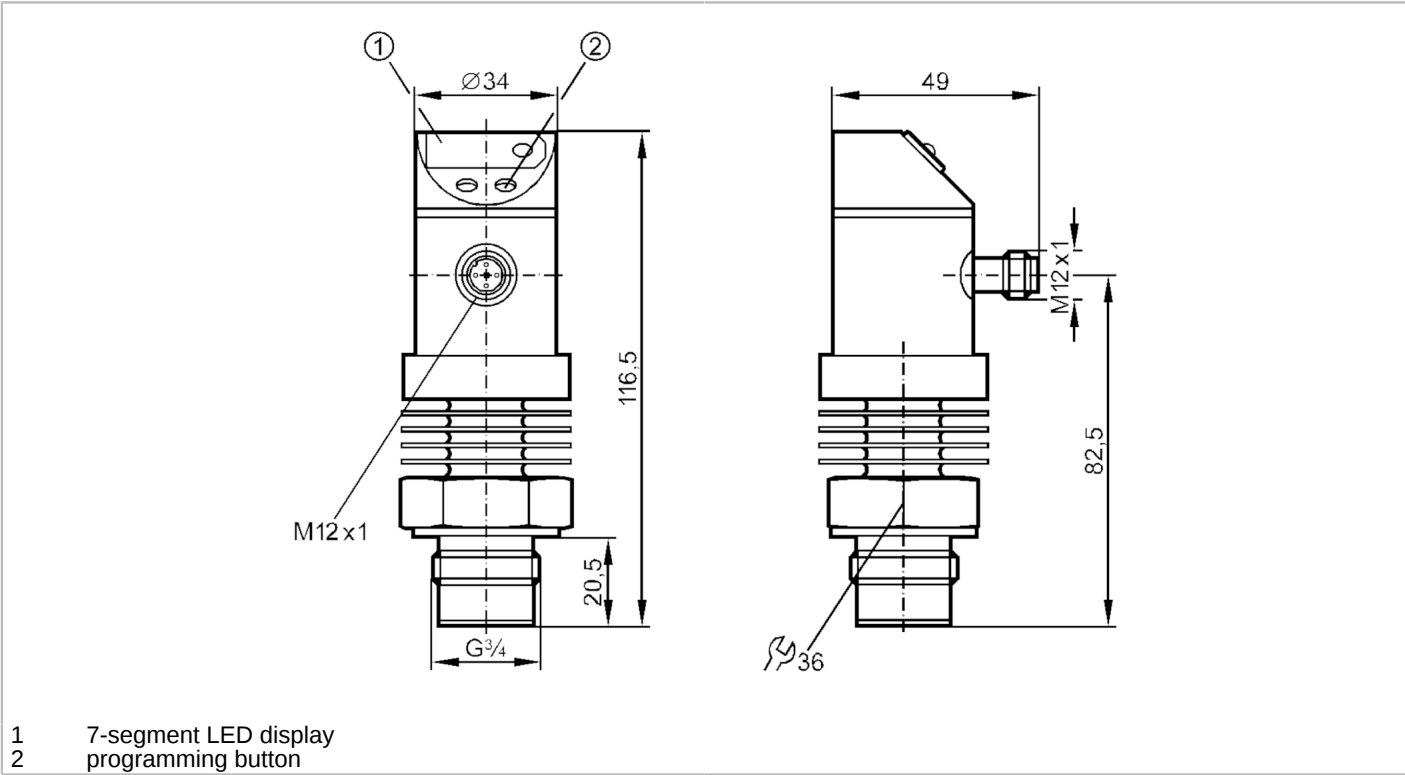

Product characteristics		
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1
Measuring range	[bar]	0...1
Process connection		threaded connection G 3/4 external thread
Application		
Special feature		Gold-plated contacts
Application		flush mountable for the food and beverage industry
Installation		freely rotatable housing 350°
Media		viscous media and liquids with suspended particles; liquids and gases
Medium temperature	[°C]	-25...125; (145 max. 1h)
Min. bursting pressure	[bar]	30
Pressure rating	[bar]	10
Type of pressure		relative pressure
No dead space		yes
Electrical data		
Operating voltage	[V]	20...30 DC
Current consumption	[mA]	< 60
Min. insulation resistance	[MΩ]	100; (500 V DC)



Flush pressure sensor with display

PI-001-REB34-KFPKG/US/ /P

Protection class	III									
Reverse polarity protection	yes									
Power-on delay time [s]	0.2									
Integrated watchdog	yes									
Inputs / outputs										
Number of inputs and outputs	Number of digital outputs: 1; Number of analogue outputs: 1									
Outputs										
Total number of outputs	2									
Output signal	switching signal; analogue signal; (configurable)									
Electrical design	PNP									
Number of digital outputs	1									
Max. voltage drop switching output DC [V]	2									
Permanent current rating of switching output DC [mA]	250									
Number of analogue outputs	1									
Analogue current output [mA]	4...20									
Max. load [Ω]	500									
Short-circuit protection	yes									
Type of short-circuit protection	pulsed									
Overload protection	yes									
Measuring/setting range										
Measuring range [bar]	0...1									
Set point SP [bar]	0.05...1									
Reset point rP [bar]	0.03...0.99									
In steps of [bar]	0.01									
Accuracy / deviations										
Switch point accuracy [% of the final value]	< ± 1,5									
Repeatability [% of the final value]	< ± 0,25; (with temperature fluctuations < 10 K)									
Characteristics deviation [% of the final value]	< ± 1,0									
Temperature drift per 10 K	< ± 0.3									
Response times										
Switching frequency for a given set response time of one output	Response time (dAP) [ms]	3	6	10	17	30	60	125	250	500
	Switching frequency [Hz]	170	80	50	30	16	8	4	2	1
Response time [ms]	at rectangular pressure characteristic; switch point (SPx) = 70 %; reset point (rPx) = 30 %									
Delay time programmable dS, dr [s]	0, 0,2,...10, 11,...50									
Max. response time analogue output [ms]	3									



Flush pressure sensor with display

PI-001-REB34-KFPKG/US/ /P

Software / programming		
Adjustment of the switch point	programming button	
Parameter setting options	hysteresis / window; normally open / normally closed; switch-on/switch-off delay; Damping	
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 65	
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
Mechanical data		
Materials	stainless steel (316L/1.4404); PBT; PC; PA; EPDM/X; FKM	
Materials (wetted parts)	stainless steel (316L/1.4404); ceramics; FKM; PTFE	
Min. pressure cycles	100 million	
Process connection	threaded connection G 3/4 external thread	
Displays / operating elements		
Display	switching status	LED, red
	function display	7-segment LED display
	measured values	7-segment LED display
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		
		

PI3957



Flush pressure sensor with display

PI-001-REB34-KFPKG/US/ IP

Connection

