

Technical drawing of the LED light fixture showing front and side views with dimensions:

- Front View (Left):** Shows the main body of the fixture. The mounting thread is labeled **M12x1**. The height of the mounting flange is **15,5**. The length of the main body is **49,5**. The total length, including the mounting flange, is labeled **L**. A wrench icon with the number **14** indicates the required wrench size.
- Side View (Right):** Shows the fixture from the side, highlighting the **LED** light source. The height of the mounting flange is **26,5**. The height of the main body is **36,5**. The height of the mounting flange is **15,5**. The mounting thread is labeled **M12x1**. A wrench icon with the number **14** indicates the required wrench size.



易福门电子(上海)有限公司 • 上海市浦东新区 • 盛夏路61弄1号楼6层 • 邮编: 201203, 总机: 021 3813 4800 • 传真: 021 5027



连接电缆

VDOAH043MSS0020H04STGH040MSS

滚花螺母的材料	黄铜, 镀镍的	
密封材料	FKM	
牵引链适用性	有	
牵引链适用性	用于灵活应用的弯曲直径	min. 10 x 电缆直径
	传播速度	用于水平传播长度5m的最大值3.3 m/s和最大值加速度5 m/s²
	弯曲周期	> 5 Mio.
	扭转应力	± 180 °/m

显示器/操作件

显示	开关状态	2 x LED, 黄色
	操作	1 x LED, 绿色

注释

说明	请参阅“下载”下的技术说明	
包装单位	1 件	

电气连接 - 插头


接插件: 1 x M12, 直型; 译码: A; 成型体: TPU, 桔黄色; 锁定: 黄铜, 镀镍的; 触头: 镀金的; 拧紧扭矩: 0.6...1.5 Nm



电气连接

电缆: 20 m, PUR, 无卤素, 黑色, Ø 4.3 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

接口

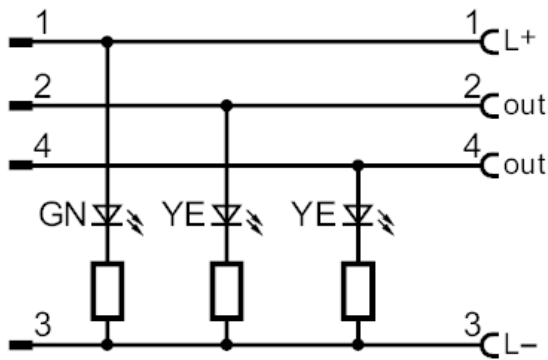



连接电缆

VDOAH043MSS0020H04STGH040MSS

电气连接 - 插座

接插件: 1 x M12, 角型; 译码: A; 成型体: TPU, 黑色透明的; 锁定: 黄铜, 镀镍的; 密封圈: FKM; 触头: 镀金的; 拧紧扭矩: 0.6...1.5 Nm

