


Cylinder sensor for integrated profile cylinders

MKP3000-ANKG/US

Article no longer available - archive entry

Alternative articles: MK5113 + E11799

When selecting an alternative article and accessories please note that technical data may differ!

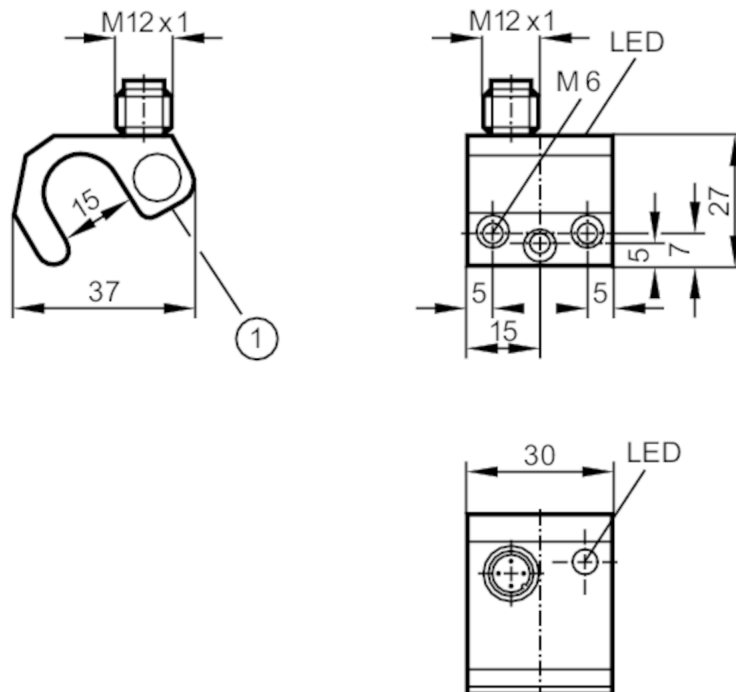

1 Sensing face



Product characteristics

Electrical design	NPN
Output function	normally open
Dimensions [mm]	37 x 30 x 27

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 10
Reverse polarity protection	yes
Max. power-on delay time [ms]	2

Outputs

Electrical design	NPN
Output function	normally open
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	300
Switching frequency DC [Hz]	5000
Short-circuit protection	yes

MK5038



Cylinder sensor for integrated profile cylinders

MKP3000-ANKG/US

Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Response sensitivity	[mT]	3
Travel speed	[m/s]	< 5

Accuracy / deviations

Hysteresis	[mm]	1
Repeatability	[mm]	0.1

Operating conditions

Ambient temperature	[°C]	-25...75
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
Shock/vibration resistance		30 g (11 ms) / 10-55 Hz (1 mm)

Mechanical data

Sensing face		front
Cylinder type		integrated profile cylinders
Dimensions	[mm]	37 x 30 x 27
Materials		aluminium; plastics

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A



MK5038



Cylinder sensor for integrated profile cylinders

MKP3000-ANKG/US

Connection

