

### Cooling water control panel

SUCTION SYSTEM FOR COOLING WATER



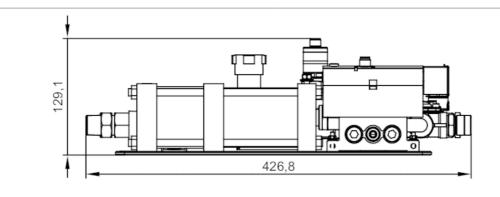

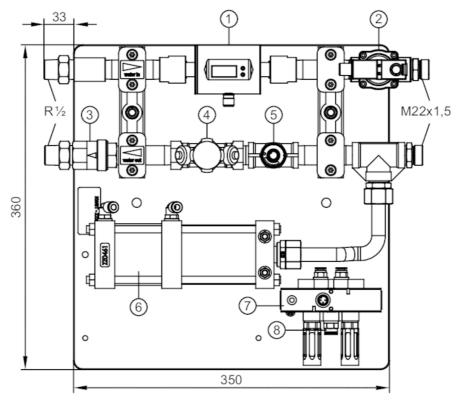

- magnetic-inductive flow meter SM6000 water stop valve backstop regulating valve electronic pressure monitor PK6524 expansion cylinder 5/2-way valve tube connection Ø 8 mm
- 1 2 3 4 5 6 7 8



| Product characteristics             |                           |  |
|-------------------------------------|---------------------------|--|
| Process connection for welding gun  |                           |  |
| Process connection                  | M22 x 1,5                 |  |
| Process connection for water supply |                           |  |
| Process connection                  | threaded connection R 1/2 |  |

# **ZZ0432**

## Cooling water control panel

SUCTION SYSTEM FOR COOLING WATER



| Flow monitoring                                     |         |   |
|---|---------|---|
| Measuring range                                     | [l/min] | 0.125   |
| Application   |         |   |
| Special feature                                     |         | Gold-plated contacts  |
| Application   |         | Industrial applications / factory automation; cooling water control; cooling water extraction |
| Installation  |         | connection to pipe by means of an adapter; tube connection                                    |
| Measuring parameters                                |         | flow; temperature; pressure; totaliser  |
| Control   |         | manual  |
| Media   |         | conductive liquids; hydrous media; glycol solutions   |
| Medium temperature                                  | [°C]    | -1070   |
| Pressure rating                                     | [bar]   | 10  |
| Volume expansion cylinder                           | [ml]    | 99.75   |
| Components  |         | Magnetic-inductive flow meter, SM6000   |
|   |         | Electronic pressure monitor, PK6524   |
|   |         | water stop valve  |
|   |         | regulating valve  |
|   |         | backstop  |
|   |         | expansion cylinder  |
| Outrout a   |         | 5/2-way valve   |
| Outputs   |         | avitahing signah agalagus signah aylan signah IO Ligh (sagfigugahla)                          |
| Output signal                                       |         | switching signal; analogue signal; pulse signal; IO-Link (configurable)                       |
| Output function                                     |         | normally open / normally closed; (parameterisable)  |
| Measuring/setting range                             |         |   |
| Pressure monitoring                                 |         |   |
| Measuring range                                     | [bar]   | 010   |
| Flow monitoring                                     |         |   |
| Measuring range                                     | [l/min] | 0.125   |
| Temperature monitoring                              |         |   |
| Measuring range                                     | [°C]    | -2080   |
| Response times                                      |         |   |
| Risk time (response time for safety-related faults) | [ms]    | 500   |
| Operating conditions                                |         |   |
| Ambient temperature                                 | [°C]    | -1050   |
| Storage temperature                                 | [°C]    | -2580   |
| Protection  |         | IP 67; (sensors)  |
| Tests / approvals                                   |         |   |
| EMC   |         | DIN EN 61000-6-2  |
| LIVIC   |         | DIN EN 61000-6-3  |
| Pressure Equipment Directiv                         | re      | Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request         |
| Mechanical data                                     |         |   |
| Weight  | [g]     | 8702.8  |
| Type of mounting                                    | [9]     | with mounting plate   |
| Materials   |         | stainless steel (316L/1.4404); PBT-GF20; PC; FKM; TPE; PBT; gunmetal (2.1096.01)              |
| - IVIGICITALS                                       |         | Statiliess steel (310L/1.4404), FD1-GF20, FC, FNN, TPE, FD1, yulliletal (2.1090.01)           |

# **ZZ0432**

## Cooling water control panel



SUCTION SYSTEM FOR COOLING WATER

| Materials (wetted parts)                  | stainless steel (316L/1.4404); PEEK; FKM; NBR; PVDF; PTFE |  |  |
|---|---|--|--|
| Process connection for welding gun        |   |  |  |
| Process connection                        | M22 x 1,5   |  |  |
| Process connection for water supply       |   |  |  |
| Process connection                        | threaded connection R 1/2                                 |  |  |
| Remarks                                   |   |  |  |
| Pack quantity                             | 1 pcs.  |  |  |
| Electrical connection                     |   |  |  |
| Connector: 4 x M12; Contacts: gold-plated |   |  |  |