


**Evaluation unit for speed monitoring**

D100/ 27-60VAC/DC

Article no longer available - archive entry

Alternative articles: DD0203

When selecting an alternative article and accessories please note that technical data may differ!

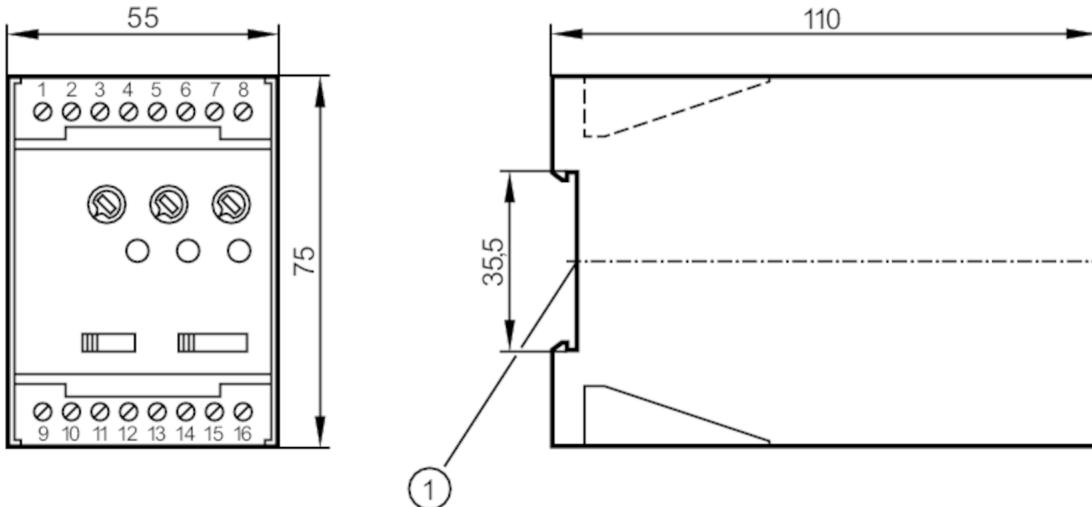

1 mounting on DIN rail

**Product characteristics**

Housing	housing for DIN rail mounting
---------	-------------------------------

Dimensions [mm]	75 x 55 x 110
-----------------	---------------

**Application**

Application	universal evaluation of pulse sequences with regard to overspeed and underspeed; rotational speed monitoring
-------------	--

**Electrical data**

Nominal voltage AC [V]	27...60
------------------------	---------

Nominal voltage DC [V]	27...60
------------------------	---------

Nominal voltage tolerance [%]	< 10
-------------------------------	------

Nominal voltage tolerance 2 [%]	20...10
---------------------------------	---------

Nominal frequency AC [Hz]	50...60
---------------------------	---------

Auxiliary energy for sensors DC [V]	24; ( $\leq$ 30 mA)
-------------------------------------	---------------------

**Inputs / outputs**

Number of inputs and outputs	Number of relay outputs: 1
------------------------------	----------------------------

**Outputs**

Number of relay outputs	1
-------------------------	---

Contact rating	6 A (250 V AC); B300, R300
----------------	----------------------------

Analogue current output [mA]	...200
------------------------------	--------

Analogue voltage output [V]	...24
-----------------------------	-------

**Evaluation unit for speed monitoring**

D100/ 27-60VAC/DC


<b>Measuring/setting range</b>		
Setting range	[Imp/min]	5...5000
<b>Accuracy / deviations</b>		
Hysteresis	[% of Sr]	5...100
Repeatability	[% of Sr]	1
<b>Response times</b>		
Start-up delay	[s]	0.5...15
<b>Software / programming</b>		
Adjustment of the switch point		fine adjustment within the range with potentiometer
<b>Operating conditions</b>		
Ambient temperature	[°C]	-20...70
Protection		IP 40
Protection rating terminals		IP 20
<b>Mechanical data</b>		
Weight	[g]	289.6
Housing		housing for DIN rail mounting
Dimensions	[mm]	75 x 55 x 110
Materials		plastics
<b>Displays / operating elements</b>		
Display	switching status	LED, green
	operation	1 x LED, green

## Evaluation unit for speed monitoring

D100/ 27-60VAC/DC

## Electrical connection

## Connection

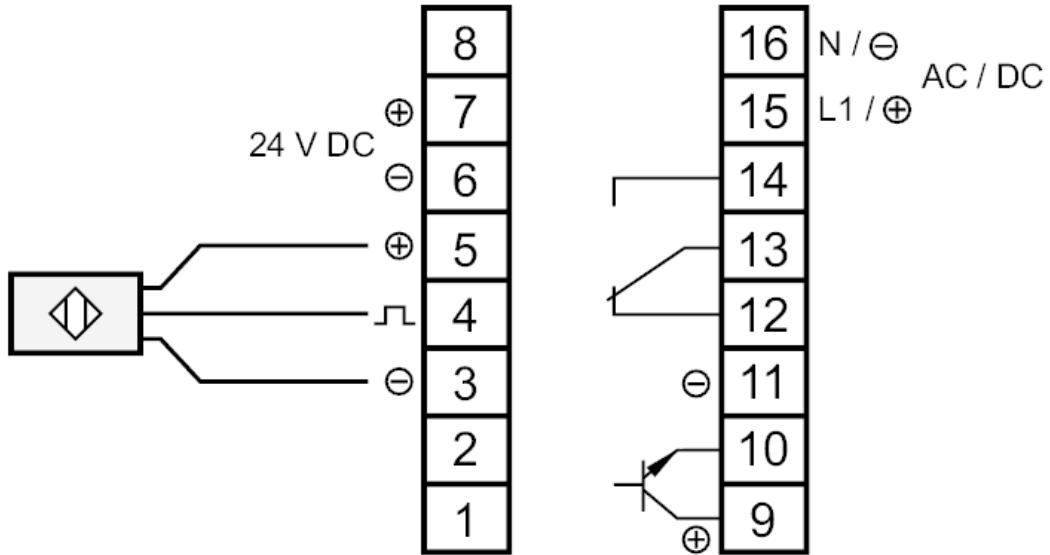

01:	not used
02:	not used
03:	DC Sensor supply (-)
04:	sensor signal pnp
05:	DC Sensor supply (+)
06:	DC supply voltage (-)
07:	DC supply voltage (+)
08:	not used
09:	transistor output current supply (+)
10:	transistor output pnp
11:	transistor output current supply (-)
12:	relay normally closed
13:	relay common
14:	relay normally open
15:	AC/DC supply voltage (L/+)
16:	AC/DC supply voltage (N/-)