


EBC011



Splitter box

ZDO8H050MSS0000-00STAK190MSS

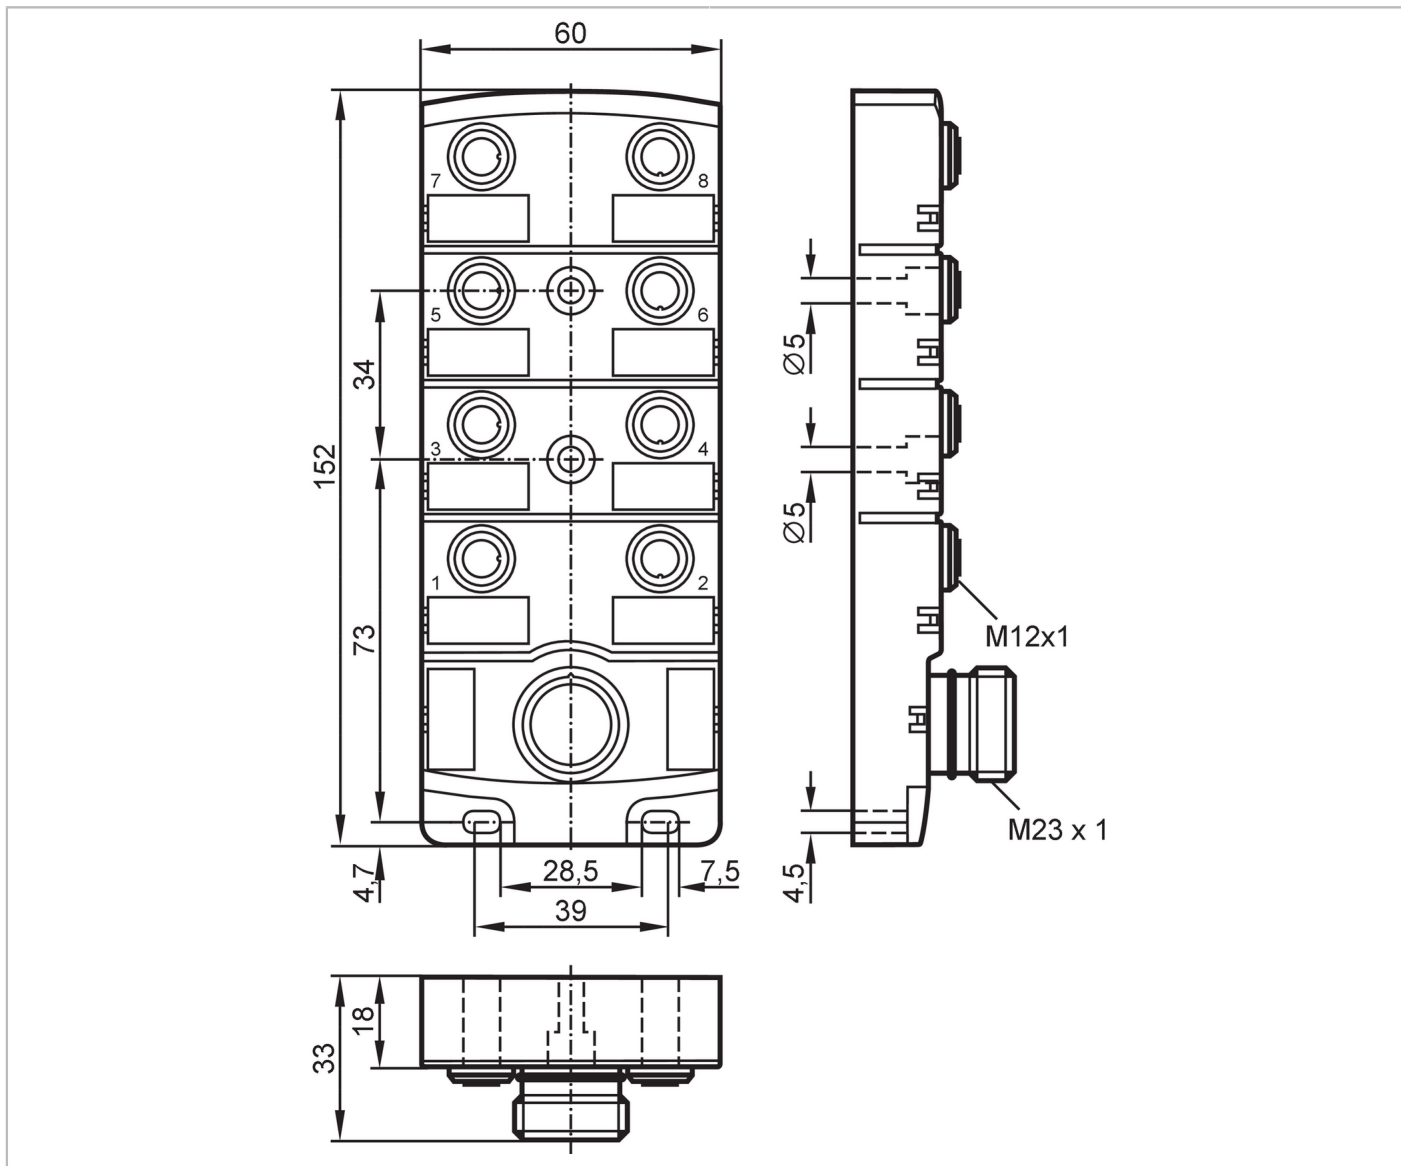

Application		
Special feature		Free from silicone; Gold-plated contacts
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1



Splitter box

ZDO8H050MSS0000-00STAK190MSS


Mechanical data	
Weight [g]	303.5
Housing	rectangular
Type of mounting	backplane mounting
Dimensions [mm]	152 x 60 x 33
Materials	housing: PA
Number of ports splitter box	8
Connector type	M12

Accessories	
Items supplied	Protective caps: 2 labels: 8

Remarks	
Pack quantity	1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Contacts: 19, gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

+ 19	1 (1...8)
- 6	3 (1...8)
⊥ 12	5 (1...8)
15	4 (1)
7	2 (1)
5	4 (2)
4	2 (2)
16	4 (3)
8	2 (3)
3	4 (4)
14	2 (4)
17	4 (5)
9	2 (5)
2	4 (6)
13	2 (6)
11	4 (7)
10	2 (7)
1	4 (8)
18	2 (8)

EBC011



Splitter box

ZDO8H050MSS0000-00STAK190MSS

Electrical connection - slot

Connector: 8 x M12; coding: 5; Contacts: A, gold-plated; Tightening torque: 0.8...1.5 Nm

