




Switching amplifiers for Namur sensors

NV0100/220VAC

Article no longer available - archive entry

Alternative articles: N0031A

When selecting an alternative article and accessories please note that technical data may differ!

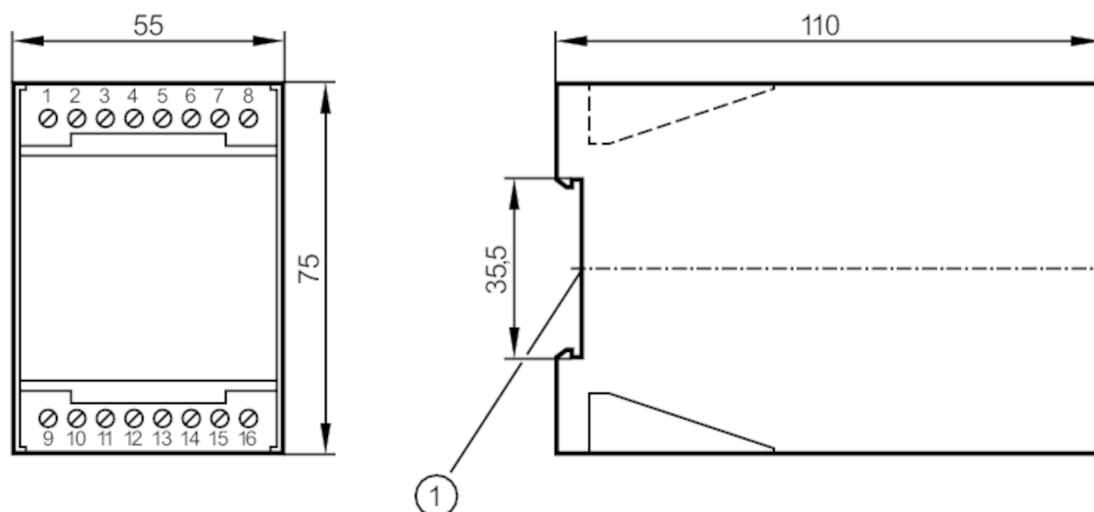

1 mounting on DIN rail



Application

Application short-circuit monitoring; Wire monitoring

Electrical data

Operating voltage tolerance [%]	-15...10
Operating voltage [V]	< 220 AC
Number of channels	1

Outputs

Electrical design	relay
Contact rating	4 A, 250 V AC / 500 VA
Switching frequency DC [Hz]	10

Operating conditions

Ambient temperature [°C]	-20...60
Protection	IP 30
Protection rating terminals	IP 20

Tests / approvals

Approval PTB Ex-84/2066X

Safety classification

Designation	in protection rating intrinsic safety
Voltage [V]	< 13,4
Current [mA]	< 18,5
Power [mW]	< 62



Switching amplifiers for Namur sensors

NV0100/220VAC

[Ex ia] IIC designation	[EEx ia] IIC
[Ex ia] IIB designation	[EEx ib] IIC
[Ex ia] IIC inductance	1mH / 3mH
[Ex ia] IIB inductance	90mH
[Ex ia] IIC capacitance	390nF / 345nF
[Ex ia] IIB capacitance	660nF

Mechanical data

Housing	housing for DIN rail mounting
Dimensions [mm]	75 x 55 x 110

Displays / operating elements

Display	switching status	LED, red
	operation	LED, green


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 16 x ...2.5 mm²

Connection

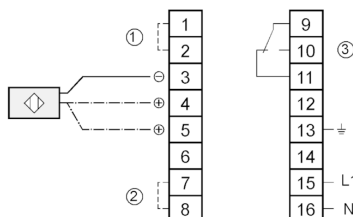

- 1: Wire monitoring#
- 2: Output function
- 3: Relais