

SM8601



Magnetic-inductive flow meter

SMN11GGXFRKG/US-100

Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	200
Number of analogue outputs	1
Analogue current output [mA]	4...20; (scalable)
Max. load [Ω]	500
Analogue voltage output [V]	0...10; (scalable)
Min. load resistance [Ω]	2000
Pulse output	flow rate meter
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Measuring/setting range

Measuring range	6...1584 gph	0.1...26.4 gpm
Display range	-1902...1902 gph	-31.7...31.7 gpm
Resolution	2 gph	0.05 gpm
Set point SP	14...1586 gph	0.25...26.4 gpm
Reset point rP	6...1578 gph	0.1...26.25 gpm
Analogue start point ASP	0...1272 gph	0...21.2 gpm
Analogue end point AEP	312...1586 gph	5.2...26.4 gpm
In steps of	2 gph	0.05 gpm

Volumetric flow quantity monitoring

Pulse value	0.01...100 000 000 gal
Pulse length [s]	0,0025...2

Temperature monitoring

Measuring range [°F]	-4...176
Resolution [°F]	0.5
Set point SP [°F]	-2.5...176
Reset point rP [°F]	-3.5...175
Analogue start point [°F]	-4...140.5
Analogue end point [°F]	31.5...176
In steps of [°F]	0.5

Accuracy / deviations

Flow monitoring

Accuracy (in the measuring range)	± (0,8 % MW + 0,5 % MEW)
Repeatability	± 0,2% MEW

Temperature monitoring

Accuracy [K]	± 2,5 (Q > 0,26 gpm)
--------------	----------------------

SM8601



Magnetic-inductive flow meter

SMN11GGXFRKG/US-100

Response times		
Flow monitoring		
Response time	[s]	0.15; (dAP = 0, T19)
Delay time programmable dS, dr	[s]	0...50
Damping process value dAP	[s]	0...5
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 20 (Q > 0,26 gpm)
Software / programming		
Parameter setting options	Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / normally closed; switching logic; current/voltage/pulse output; start-up delay; display can be deactivated; Display unit	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	yes	
Required master port type	A	
Process data analogue	3	
Process data binary	2	
Min. process cycle time	[ms]	5
Supported DeviceIDs	Type of operation	DeviceID
	default	576
Operating conditions		
Ambient temperature	[°F]	14...140
Storage temperature	[°F]	-13...176
Protection	IP 67	
Tests / approvals		
EMC	DIN EN 60947-5-9	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	145
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	698.5
Housing	cylindrical	
Inlet pipe length	3 x DN	
Outlet pipe length	1 x DN	
Dimensions	[mm]	Ø 54 / L = 110
Materials	stainless steel (316L/1.4404); PBT-GF20; PC; FKM; TPE	

SM8601



Magnetic-inductive flow meter

SMN11GGXFRKG/US-100

Materials (wetted parts)	stainless steel (316L/1.4404); PEEK; FKM
Process connection	threaded connection 1" NPT internal thread DN25

Displays / operating elements

Display	Display unit	6 x LED, green (gpm, gph, gal, °F, 10 ³ , 1000 x 10 ³)
	switching status	2 x LED, yellow
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit

Remarks


Remarks	MW = measured value
	MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

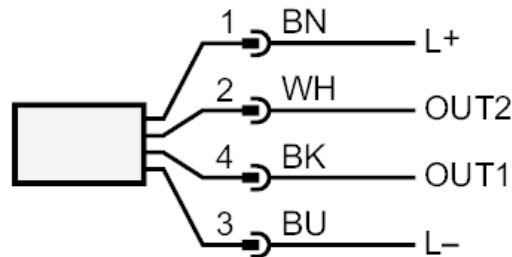

- OUT1: colours to DIN EN 60947-5-2
 switching output volumetric flow quantity monitoring
 Pulse output quantity meter
 signal output Preset counter
 IO-Link
- OUT2: switching output volumetric flow quantity monitoring
 switching output Temperature monitoring
 analogue output volumetric flow quantity monitoring
 analogue output Temperature monitoring
 input counter reset
 Core colours :
- BK = black
 BN = brown
 BU = blue
 WH = white

SM8601




Magnetic-inductive flow meter

SMN11GGXFRKG/US-100

Diagrams and graphs

Pressure loss

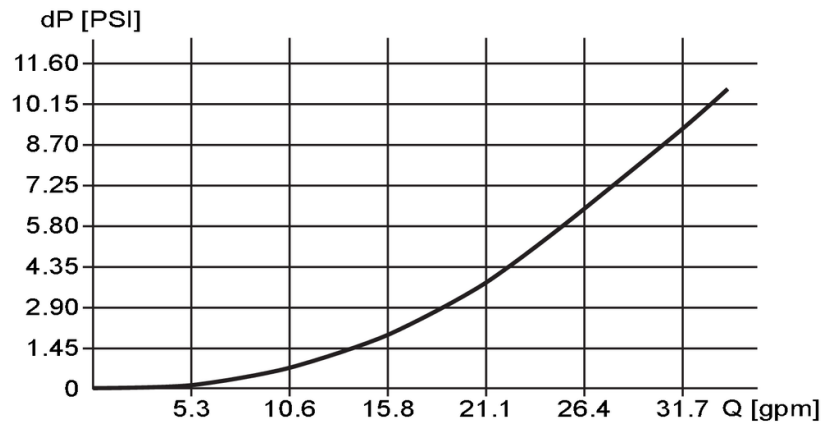

dP Pressure loss

Q volumetric flow quantity