




## Infrared temperature sensor

TW-030KLBM30-KFDKG/US

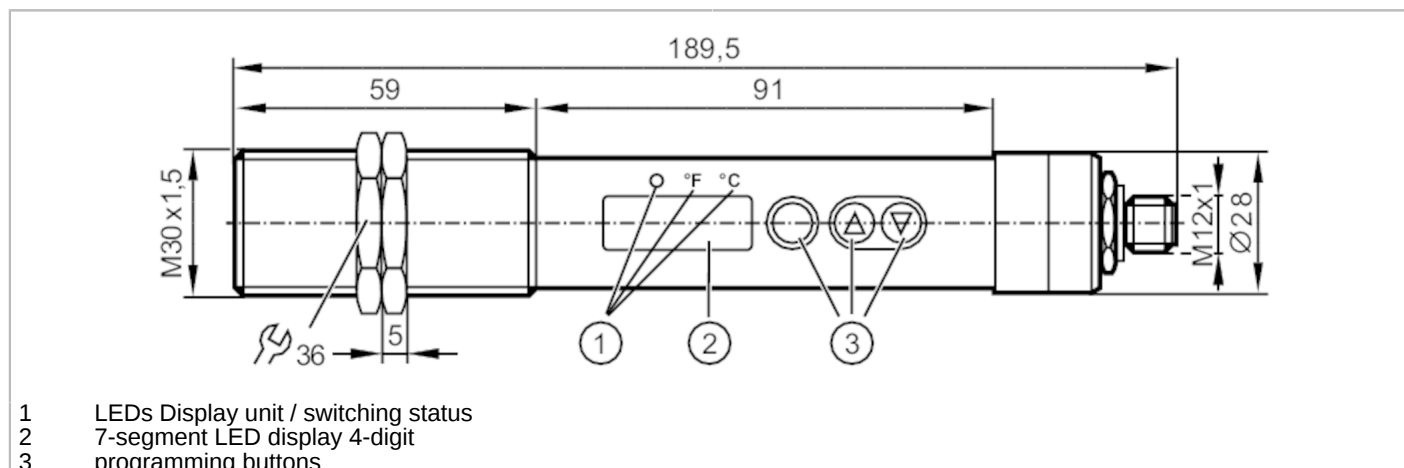

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 1; Number of analogue outputs: 1
Measuring range	0...999.5 °C      32...1831 °F
Communication interface	IO-Link

Application	
Application	asphalt; coated metal; liquids; glass; rubber; wood; ceramics; plastics; lacquers; food products; paper; fabric

Electrical data	
Operating voltage [V]	18...32 DC; (to SELV/PELV)
Current consumption [mA]	< 50
Min. insulation resistance [MΩ]	100; (50 V DC)
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 1

Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 1; Number of analogue outputs: 1

Inputs	
Test input	type 3 (IEC 61131-2)

Outputs	
Total number of outputs	2
Output signal	switching signal; analogue signal; IO-Link; (configurable)
Electrical design	PNP
Number of digital outputs	1
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150
Number of analogue outputs	1
Analogue current output [mA]	4...20

# TW2000



## Infrared temperature sensor

TW-030KLBM30-KFDKG/US

Max. load	[Ω]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Short-circuit proof		yes
Overload protection		yes

### Detection zone

Wave length range	[μm]	8...14
-------------------	------	--------

### Measuring/setting range

Measuring range	0...999.5 °C	32...1831 °F
Set point SP	1...999.5 °C	34...1831 °F
Reset point rP	0...998.5 °C	32...1829 °F
Analogue start point	0...949.5 °C	32...1741.1 °F
Analogue end point	50...999.5 °C	122...1831 °F
In steps of	0.5 °C	1 °F

### Resolution

Resolution of switching output	[K]	0.5
Resolution of analogue output	[K]	0.2; (+ 0.03% of the set measuring span)
Resolution of display	[K]	0.5

### Accuracy / deviations

Accuracy	[K]	< ± 1 %; (of measured value, min. 2 K (degree of emission = 1, T = 23 °C))
Repeatability	[K]	1

### Response times

Response time	[ms]	100
---------------	------	-----

### Software / programming

Adjustment of the switch point	programming buttons
Parameter setting options	analogue range; normally open / normally closed; switch-on/ switch-off delay; Damping; Peakhold; emissivity; simulation function

### Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	
	Generic Profiled Sensor	
	Function	
	Device identification	
	Function	
	Process data variable	
	Function	
	Device diagnosis	
SIO mode	yes	
Required master port type	A	
Process data analogue	16	
Process data binary	1	
Min. process cycle time	[ms]	3.6

# TW2000



## Infrared temperature sensor

TW-030KLBM30-KFDKG/US

Supported DeviceIDs	Type of operation	DeviceID
	default	716
Operating conditions		
Ambient temperature [°C]		0...65
Storage temperature [°C]		-20...80
Max. relative air humidity [%]		95; (non condensing)
Protection		IP 65
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	30 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [years]		88
Mechanical data		
Weight [g]		411.5
Housing		threaded type
Dimensions [mm]		M30 x 1.5 / L = 189.5
Thread designation		M30 x 1.5
Materials		threaded sleeve: stainless steel (303/1.4305); operator interface: polyester
Lens material		front pane: Infrared transparent crystal lens with anti-reflex coating
Displays / operating elements		
Display	Display unit	2 x LED, yellow
	switching status	1 x LED, yellow
	function display	7-segment LED display, 4-digit
	measured values	7-segment LED display, 4-digit
Operating elements	3	pushbuttons
Accessories		
Items supplied		lock nuts: 2
Remarks		
Remarks		Use a screened cable to protect infrared temperature sensors from interference. The screen must be connected to the housing of the sensor via the connector.
Pack quantity		1 pcs.

# TW2000




## Infrared temperature sensor

TW-030KLBM30-KFDKG/US


### Electrical connection

#### Connection

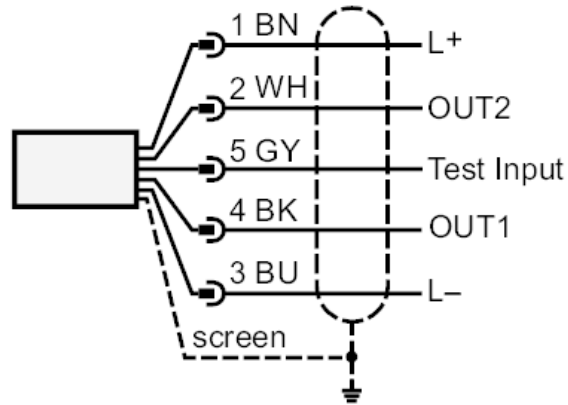


OUT1: switching output / IO-Link  
OUT2: analogue output  
Core colours :  
BK = black  
BN = brown  
BU = blue  
GY = grey  
WH = white

Connector: 1 x M12; coding: A; Contacts: 5



### Diagrams and graphs

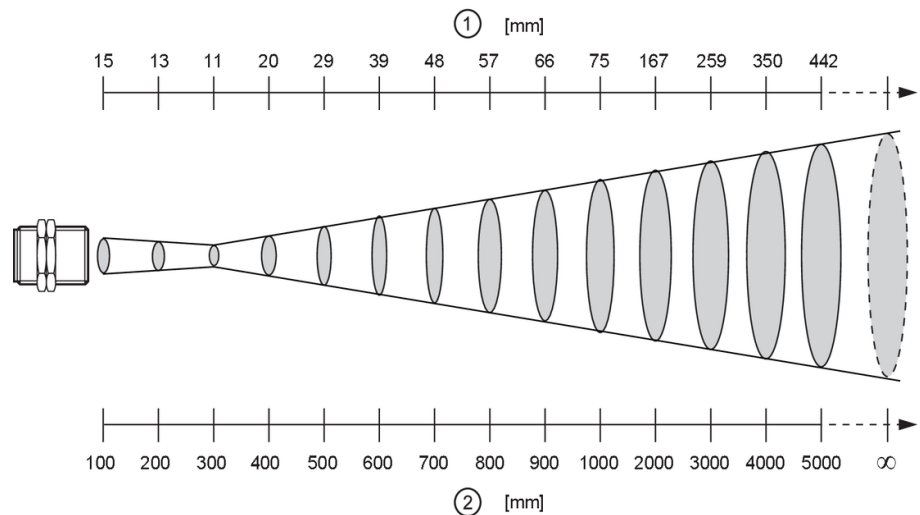

- 1 diameter of the measured spot
- 2 measuring distance