

Technical drawing of the LED module showing top and side views with dimensions.

Top View Dimensions:

- Overall width: 152
- Overall height: 60
- Height of the main body: 39
- Height of the mounting tabs: 4,5
- Distance between the center of the first and last LED: 107
- Distance between the center of the first and last LED (bottom row): 107
- Distance between the center of the first and last LED (top row): 107
- Distance between the center of the first and last LED (middle row): 107
- Distance between the center of the first and last LED (bottom row): 107

Side View Dimensions:

- Overall width: 152
- Overall height: 18
- Height of the main body: 11

Other Labels:

- LED
- M12x1

Posebno svojstvo	bez silikona; bez halogena; Pozlaćeni kontakti
Bez silikona	da

Radni napon	[V]	10...30 DC
Zaštitna klasa		II
Maks. strujno opterećenje po modulu/utoru	[A]	4
Maks. ukupno strujno opterećenje	[A]	12

Električna izvedba	PNP
--------------------	-----

Temperatura okoline	[°C]	-15...80
Zaštita		IP 67



Razdjelna kutija

ZDO8H05HMSS0010H19

Mehanički podaci

Materijali	TPU
Materijal ulivenog tijela	TPU
Broj ulaza razdjelne kutije	8
Vrsta konektora	M12

Prikazi / radni elementi

Prikaz	Status prekapčanja	16 x LED, Žuto
	Pogon	1 x LED, Zeleno

Opaske


Količina pakiranja	1 kom.
--------------------	--------

Električni priključak

Kabel: 10 m, PUR, bez halogena; 16 x 0,5 mm² (63 x Ø 0,1 mm) + 3 x 1,0 mm² (127 x Ø 0,1 mm)

Električni priključak - utor


Poveznik: 8 x M12; kodiranje: A; Oblikovana karoserija: TPU; Kontakti: pozlaćeno; Zakretni moment pritezanja: 0,5 Nm



Razdjelna kutija

ZDO8H05HMSS0010H19

Priključak

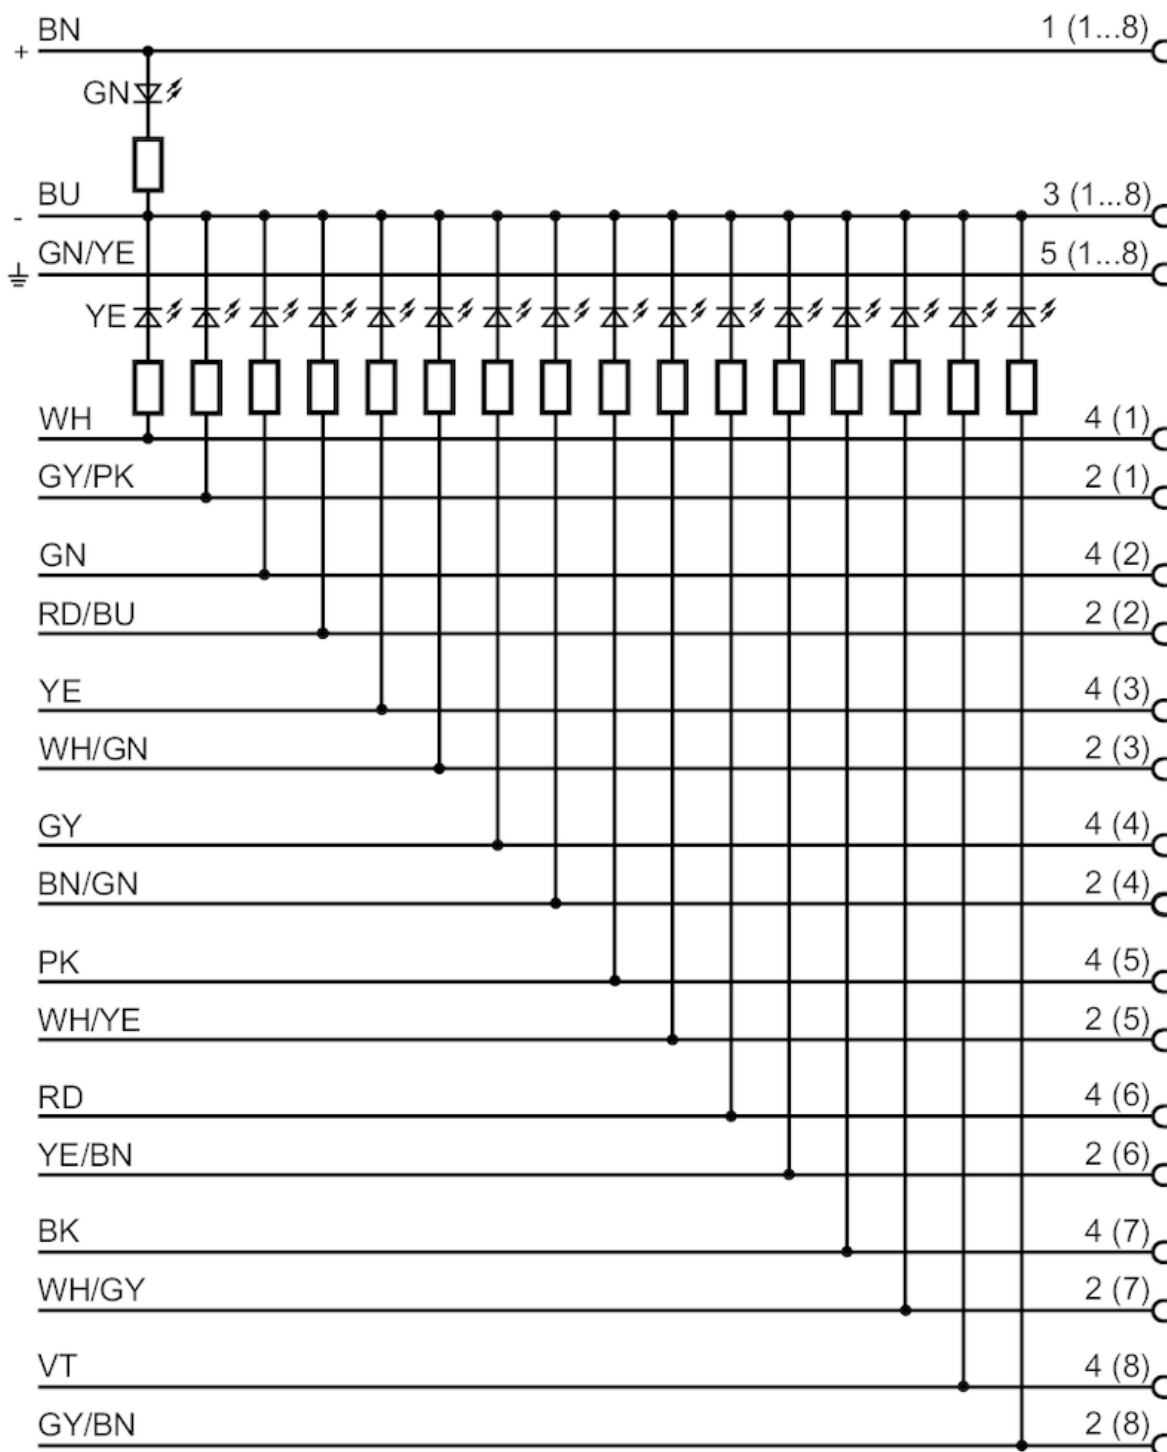

Boje žica :

BK =	crno
BN =	Smeđe
BU =	Plavo
GN =	Zeleno
GY =	Sivo
PK =	Ružičasto
RD =	Crveno
VT =	Ljubičasto
WH =	Bijelo
YE =	Žuto

E11022

Razdjelna kutija

ZDO8H05HMSS0010H19

