




Suplai daya mode switch 24 V DC

POWER SUPPLY/24VDC/30A

penghentian produk

Produk alternatif: E84036
Ketika memilih produk dan aksesori alternatif, perhatikan bahwa data teknis mungkin berbeda!

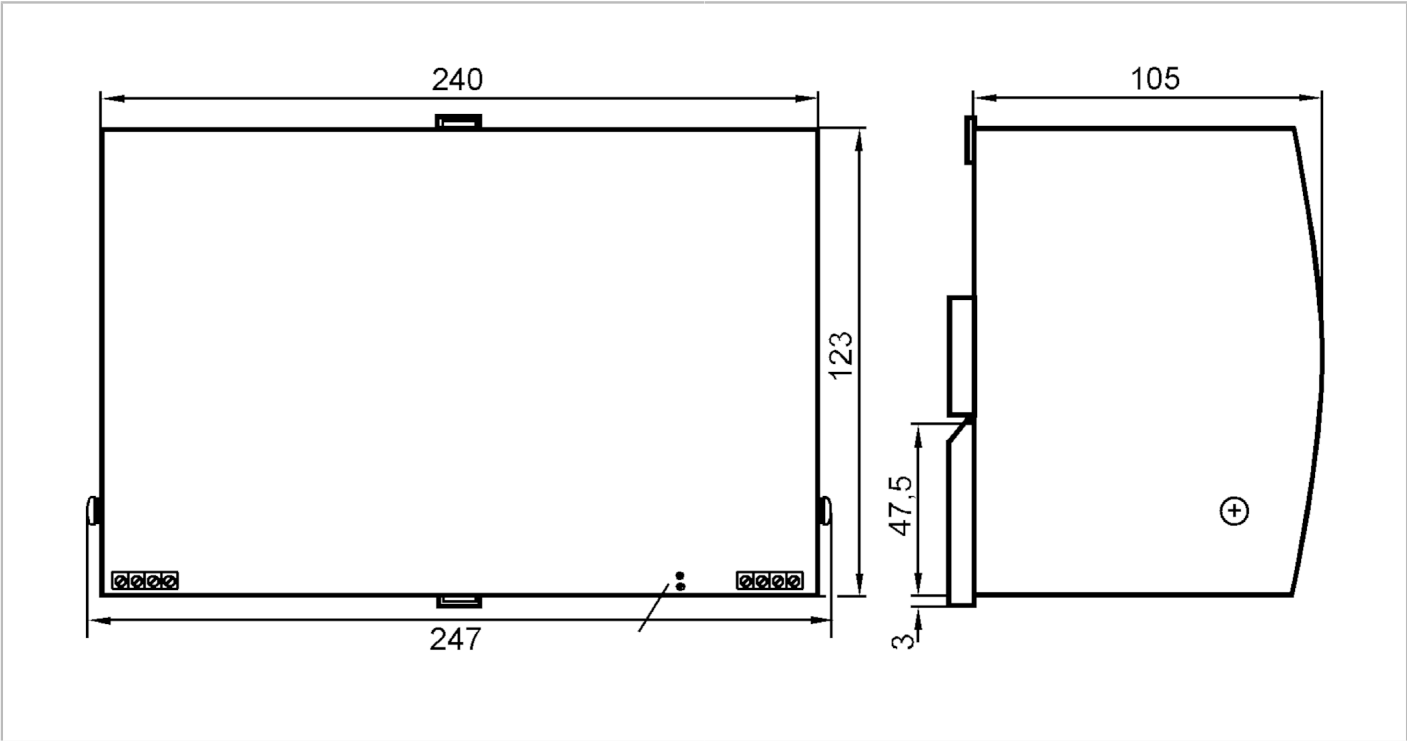


Data kelistrikan		
Tegangan nominal AC	[V]	400...500
Frekuensi nominal AC	[Hz]	47...63
Tegangan input DC	[V]	450...820
Rentang tegangan input AC	[V]	340...576
Tegangan output DC	[V]	24...28
Kelas perlindungan		I; (IEC 61140)
Waktu penundaan pengaktifan maks.	[ms]	80
Waktu penundaan pengaktifan	[s]	< 80
Tegangan output	[V]	dapat disesuaikan
Toleransi tegangan output	[%]	2
Arus output maks. pada tegangan output minimal	[A]	30
Jumlah sirkuit output		1
Sisa riak maks.	[%]	0.1
Derating	[W/K]	18 (60...70 °C)
Output		
Pelindung hubung singkat		ya



Suplai daya mode switch 24 V DC

POWER SUPPLY/24VDC/30A

Pelindung beban berlebih		ya
Kondisi pengoperasian		
Suhu sekitar	[°C]	-10...60
Perlindungan		IP 20
Pengujian/persetujuan		
EME	EN 50081-1	
	EN 61000-6-2	
MTTF	[ANN]	49
Data teknis		
Berat	[g]	2507.5
Tipe pemasangan		rel; (TH35 (EN 60715))
Material		aluminium
Elemen display/pengoperasian		
Display	Tegangan output	1 x LED, hijau
	kesalahan	1 x LED, merah
Keterangan		
Jumlah paket		1 buah
Koneksi listrik		
terminal: 1.5...6 mm ²		
Koneksi		

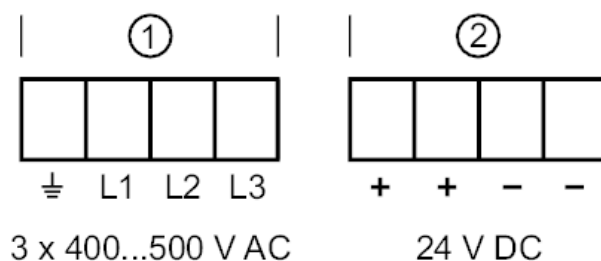

- 1 primer
2 sekunder