


IFK33,5-BPKG/V4A/15m

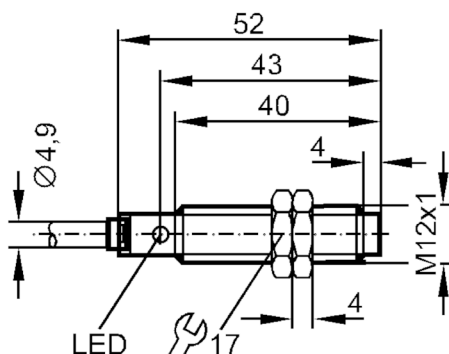

Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Jangkauan pendeteksian [mm]	3.5
Casing	tipe berulir
Dimensi [mm]	M12 x 1

Tegangan pengoperasian	[V]	10...36 DC
Konsumsi arus	[mA]	15; (24 V)
Kelas perlindungan		II
Pelindung polaritas terbalik		ya


Desain kelistrikan	PNP
Fungsi output	biasanya terbuka
Penurunan tegangan maks. pada output peralihan DC [V]	2.5
Peringkat arus permanen dari output peralihan DC [mA]	200
Frekuensi peralihan DC [Hz]	400
Pelindung hubung singkat	ya
Tipe pelindung hubung singkat	berpulsa
Pelindung beban berlebih	ya



Sensor induktif

IFK33,5-BPKG/V4A/15m

Zona pendeteksian		
Jangkauan pendeteksian	[mm]	3.5
Jangkauan pendeteksian real Sr	[mm]	3.5 ± 10 %
Jarak pengoperasian	[mm]	0...2.8
Akurasi/deviasi		
Faktor koreksi		baja: 1 / baja tahan karat: 0.7 / kuningan: 0.4 / aluminium: 0.3 / tembaga: 0.2
Histeresis	[X01]	1...15
Deviasi titik peralihan	[X01]	-10...10
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...70
Perlindungan		IP 67
Pengujian/persetujuan		
EME	EN 60947-5-2	
Data teknis		
Casing		tipe berulir
Pemasangan		non-flush mountable
Dimensi	[mm]	M12 x 1
Penamaan ulir		M12 x 1
Material		baja tahan karat (1.4571 / 316Ti); PBT
Elemen display/pengoperasian		
Display	status peralihan	1 x LED, kuning
Aksesori		
Item dikirim	mur pengunci: 2	
Keterangan		
Jumlah paket	1 buah	
Koneksi listrik		
Kabel: 15 m, PVC; 3 x 0.34 mm²		
Koneksi		

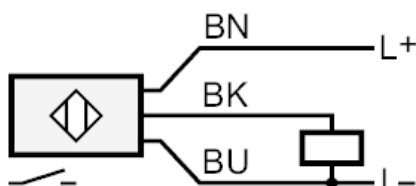

Warna core :
 BK = hitam
 BN = coklat
 BU = biru