


## AS-Interface universal module

EEMS/Module/4DO/T/CCT

Article no longer available - archive entry

Alternative articles: AC2035

When selecting an alternative article and accessories please note that technical data may differ!

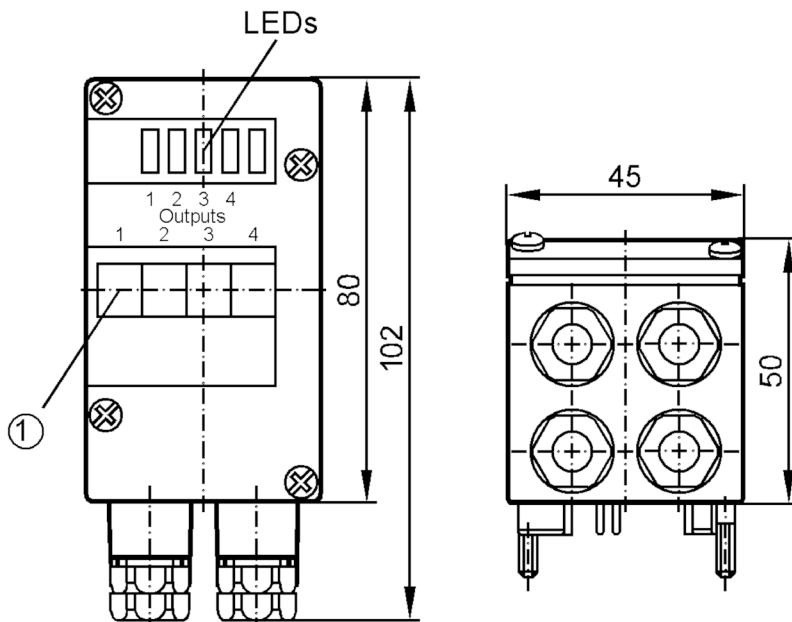

1 panel for labelling



### Electrical data

Operating voltage	[V]	26.5..31.6 DC
Current consumption	[mA]	< 60
Max. current load total	[A]	4
Integrated watchdog		yes

### Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 4
------------------------------	------------------------------

### Outputs

Electrical design	AS-i
Number of digital outputs	4
Circuit	PNP
Voltage range DC	[V]
Max. current load per output	[mA]
Short-circuit proof	yes
Electrically separated	yes

### Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65

# AC2034



## AS-Interface universal module

EEMS/Module/4DO/T/CCT

Tests / approvals					
EMC		EN 50295			
AS-i classification					
AS-i profile			S-8.0		
AS-i I/O configuration	[hex]		8		
AS-i ID code	[hex]		0		
Assignment of the data bits		data bit	D0	D1	D2
		Designation	O-1	O-2	O-3
Assignment of the parameter bits		parameter bit	function		
	P0	watchdog for all outputs	:	activated * /	deactivated
	P1	not used			
	P2	not used			
	P3	not used			
Mechanical data					
Type of mounting		AS-i interface to FC-E or SC lower parts			
Materials		PA 6-GF30; stainless steel (303/1.4305)			
Displays / operating elements					
Display		operation	LED, green		
		function	LED, yellow		
Remarks					
Pack quantity		1 pcs.			
Electrical connection					
cage clamps:					
contact pins to module lower part, FK-E / PG:					