


DD1001



Evaluation unit for speed monitoring

D100/230VAC/3LED

Article no longer available - archive entry

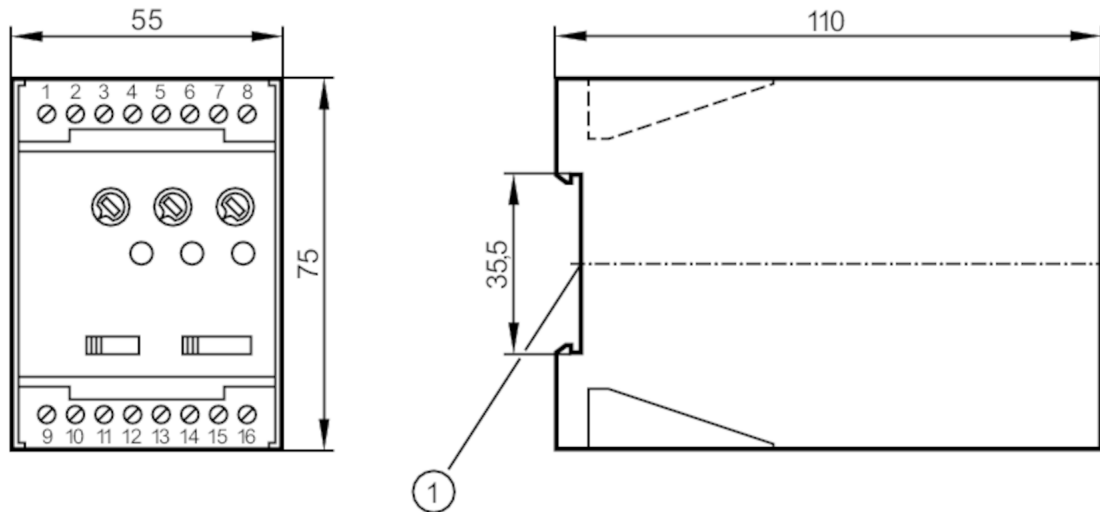

1 mounting on DIN rail



Application

Application

universal evaluation of pulse sequences with regard to
overspeed and underspeed; rotational speed monitoring

Electrical data

Nominal voltage AC	[V]	< 230
Nominal voltage DC	[V]	24
Nominal voltage tolerance	[%]	10
Nominal voltage tolerance 2	[%]	10
Nominal frequency AC	[Hz]	50...60
Auxiliary energy for sensors DC	[V]	24; (≤ 30 mA)

Inputs / outputs

Number of inputs and outputs

Number of relay outputs: 1

Outputs

Number of relay outputs

1

Contact rating

8 A / 1250 VA / 250 V AC

Detection zone

Sensing range adjustable

no

Measuring/setting range

Setting range

[Imp/min]

500...5000

Accuracy / deviations

Hysteresis

[% of Sr]

5...100

Repeatability

[% of Sr]

1


DD1001



Evaluation unit for speed monitoring

D100/230VAC/3LED

Response times		
Start-up delay	[s]	0.5...15
Software / programming		
Adjustment of the switch point		fine adjustment within the range with potentiometer
Operating conditions		
Ambient temperature	[°C]	-20...70
Protection		IP 40
Protection rating terminals		IP 20
Mechanical data		
Housing		housing for DIN rail mounting
Dimensions	[mm]	75 x 55 x 110
Materials		plastics
Displays / operating elements		
Display	switching status	LED, green
	operation	1 x LED, green
Electrical connection		
Connection		

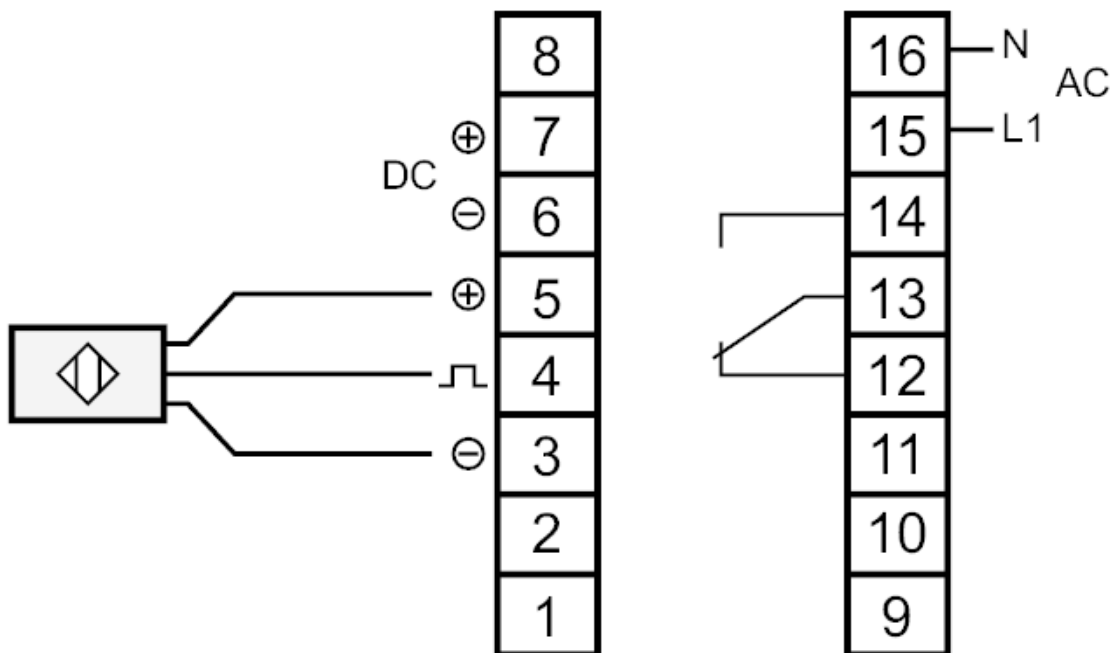

Article no longer available - archive entry